


PRODUCT MANUAL

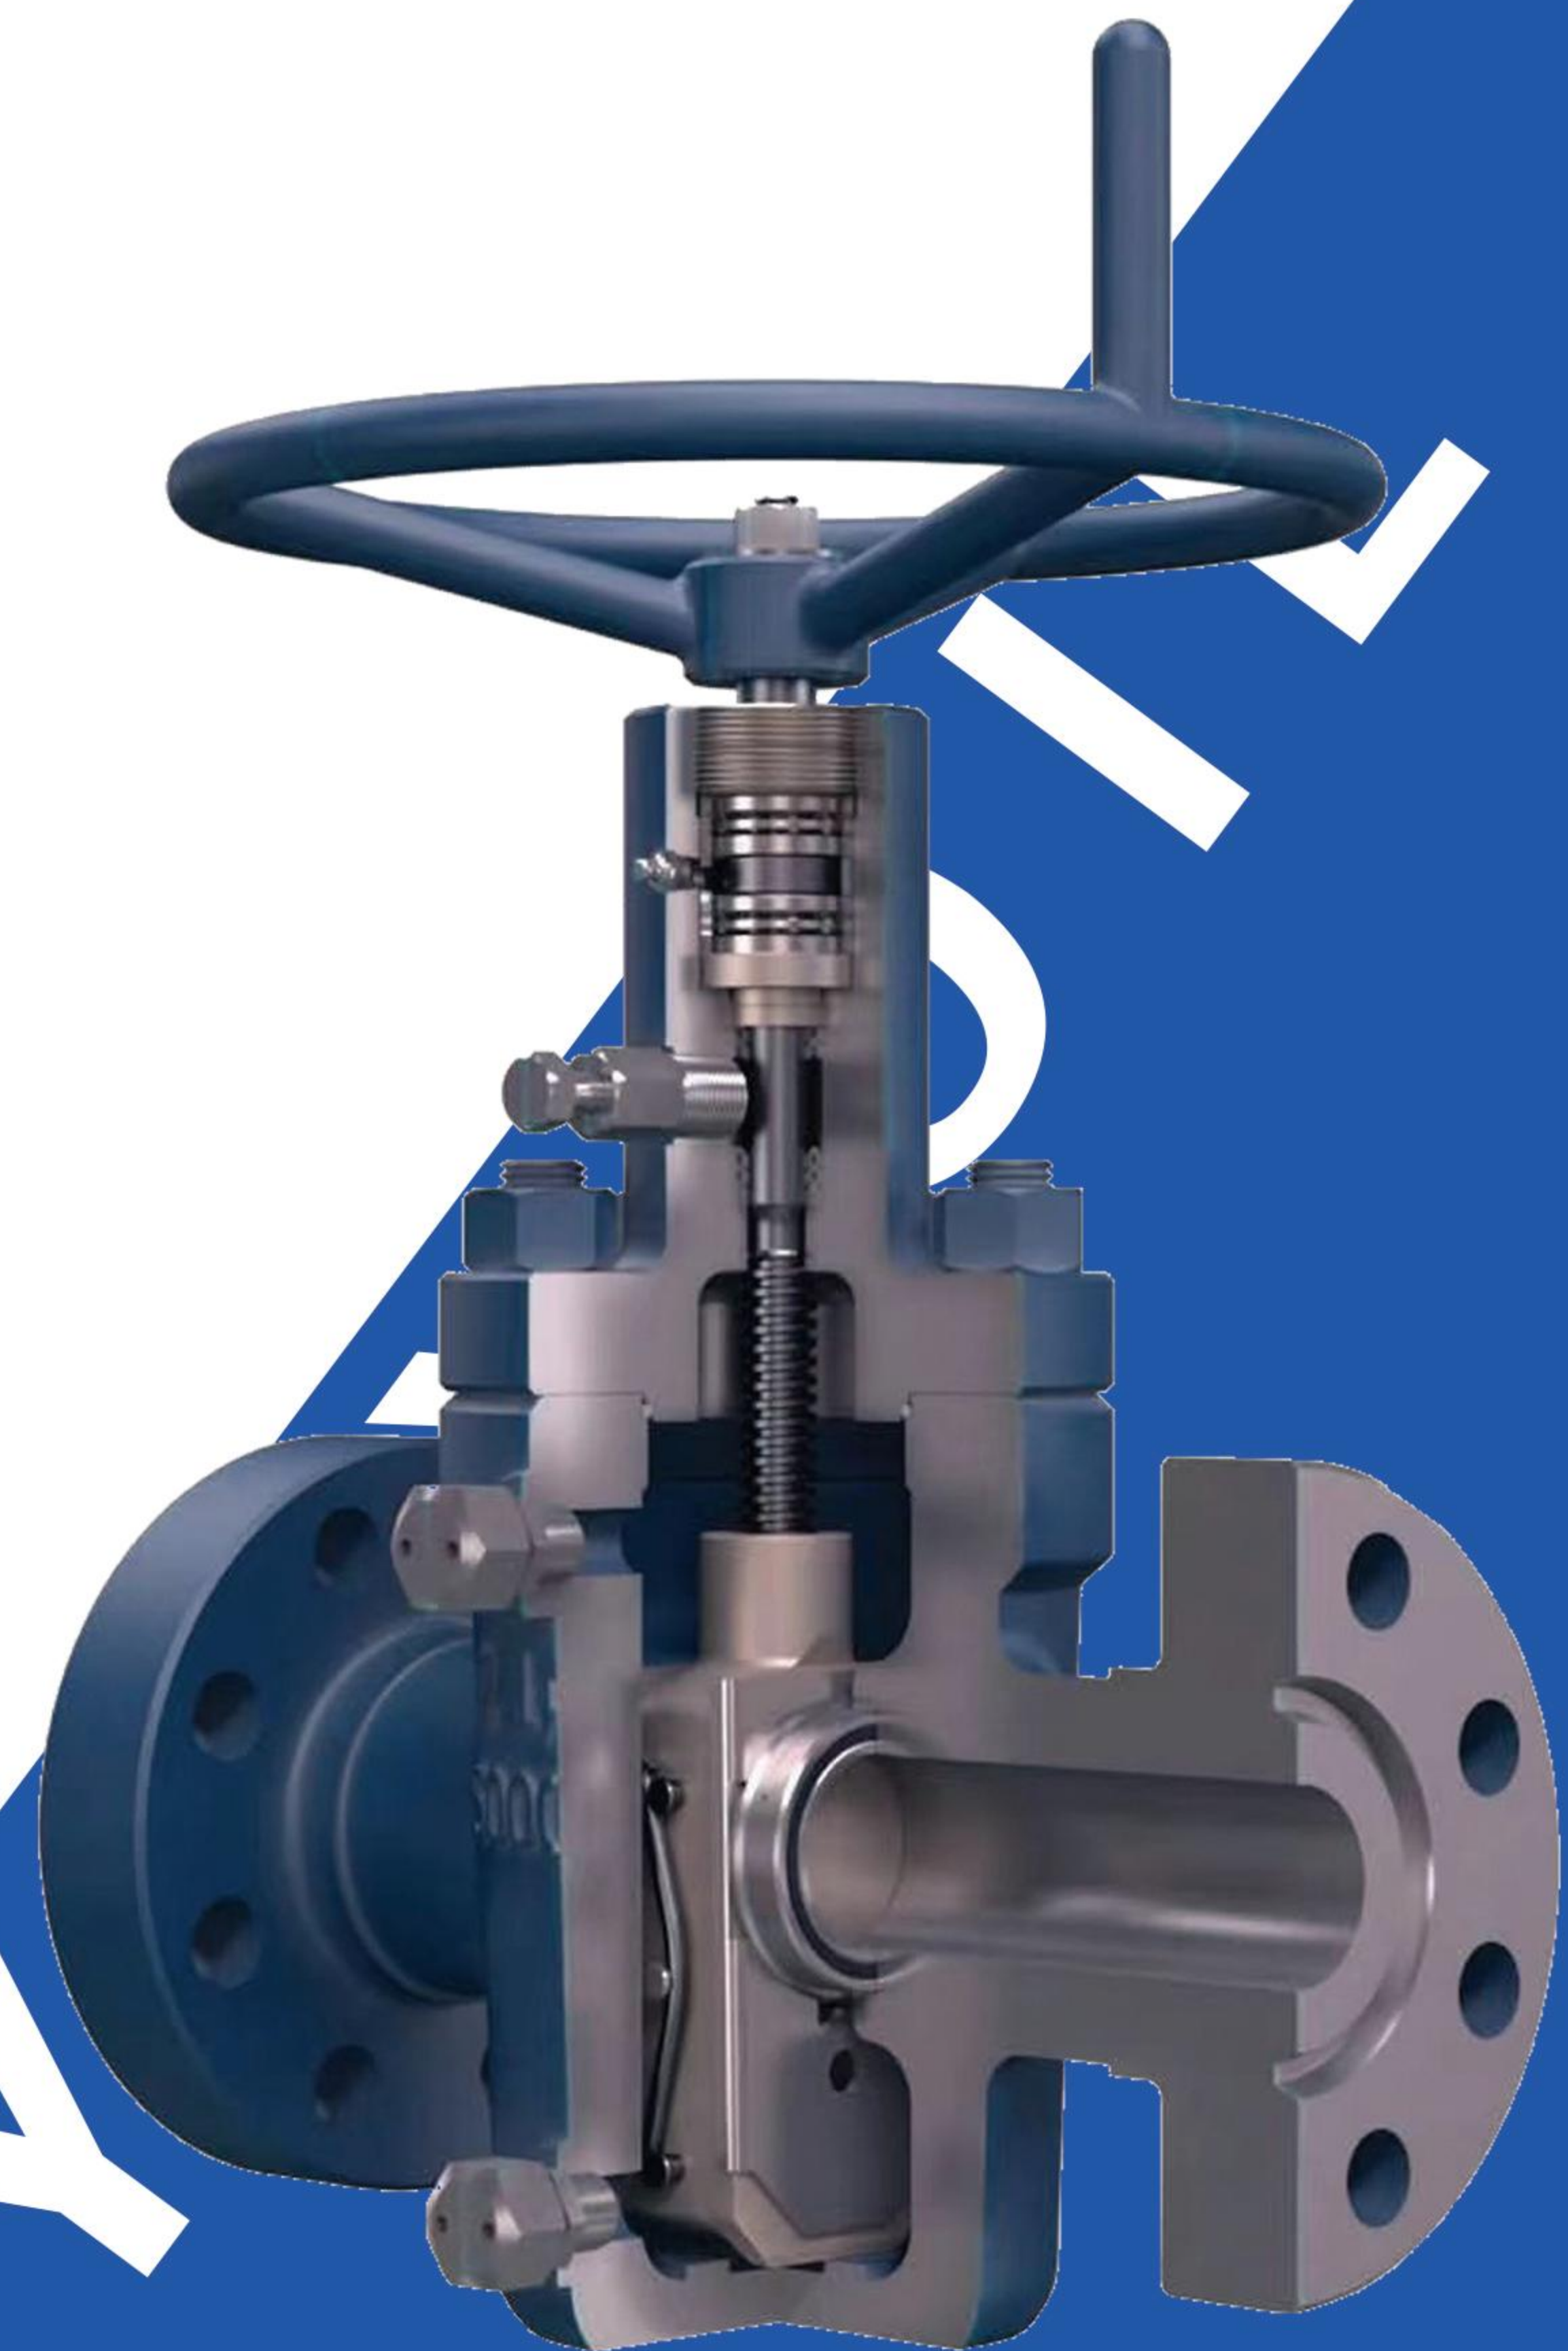

Catalog

CONTENTS

● PRODUCTION EQUIPMENT	02
● PRODUCTION EQUIPMENT	05
● APPLICATION AREA	08
● QUALITYCONTROL	11
● QUALITYCONTROL	19



PROFESSIONAL MANUFACTURER OF FILUID EQUIPMENT
Jianhu Yuxiang Machinery Manufacturing Co., Ltd



Oil and Gas
wellhead
Equipment

YUXOIL.COM

PROFESSIONAL MANUFACTURER OF FILUID EQUIPMENT

01/02

01

COMPANY PROFILE

YUXOIL.COM

COMPANY PROFILE

Jianhu County Yuxiang Machinery Manufacturing Co., Ltd. is located in Jianhu County, Yancheng City, Jiangsu Province, with convenient and fast transportation. Founded in 2011, our company is a comprehensive enterprise integrating design, manufacturing and sales. It has advanced production equipment and strong technology. It has precision spark direct reading spectrometer, testing machine, flaw detection and other inspection equipment, as well as general lathe, numerical control, machining center, drilling machine and other mechanical processing equipment; the company mainly produces API 6A gate valve, oil drilling equipment accessories, with American API-6A certificate, ISO9000 certification, etc.

The company adheres to the principle of "customer first" to provide high-quality services to the majority of customers.

FACTORY SPANS
8000
SQUARE METERS

30
AUTOMATED
PRODUCTION EQUIPMENT



PROFESSIONAL MANUFACTURER OF FILUID EQUIPMENT

05/06

02

PRODUCTION EQUIPMENT

YUXOIL.COM

PRODUCTION EQUIPMENT



PROFESSIONAL MANUFACTURER OF FLUID EQUIPMENT

09/10

03

APPLICATION AREA

YUXOIL.COM

APPLICATION AREA



API-6A valves and wellhead equipment are widely used in oil and gas extraction, storage, transportation and other supporting chemical industries such as petroleum refining

Yuxoil provides complete fluid control equipment and maintenance services for the oil extraction, oil transportation, refining and chemical industries.



04

QUALITY CONTROL

YUXOIL.COM

QUALITY CONTROL



3000-pound hardness tester



Impact Testing Machine



Magnetic Particle Flaw Detector



Ultra-deep wave flaw detector



QUALITY CONTROL



Tensile Testing Machine



Ball Gauge



Spectral Detector



Hydrostatic Test Stand




06

PRODUCT DISPLAY

YUXOIL.COM

EXPANDING GATE VALVE

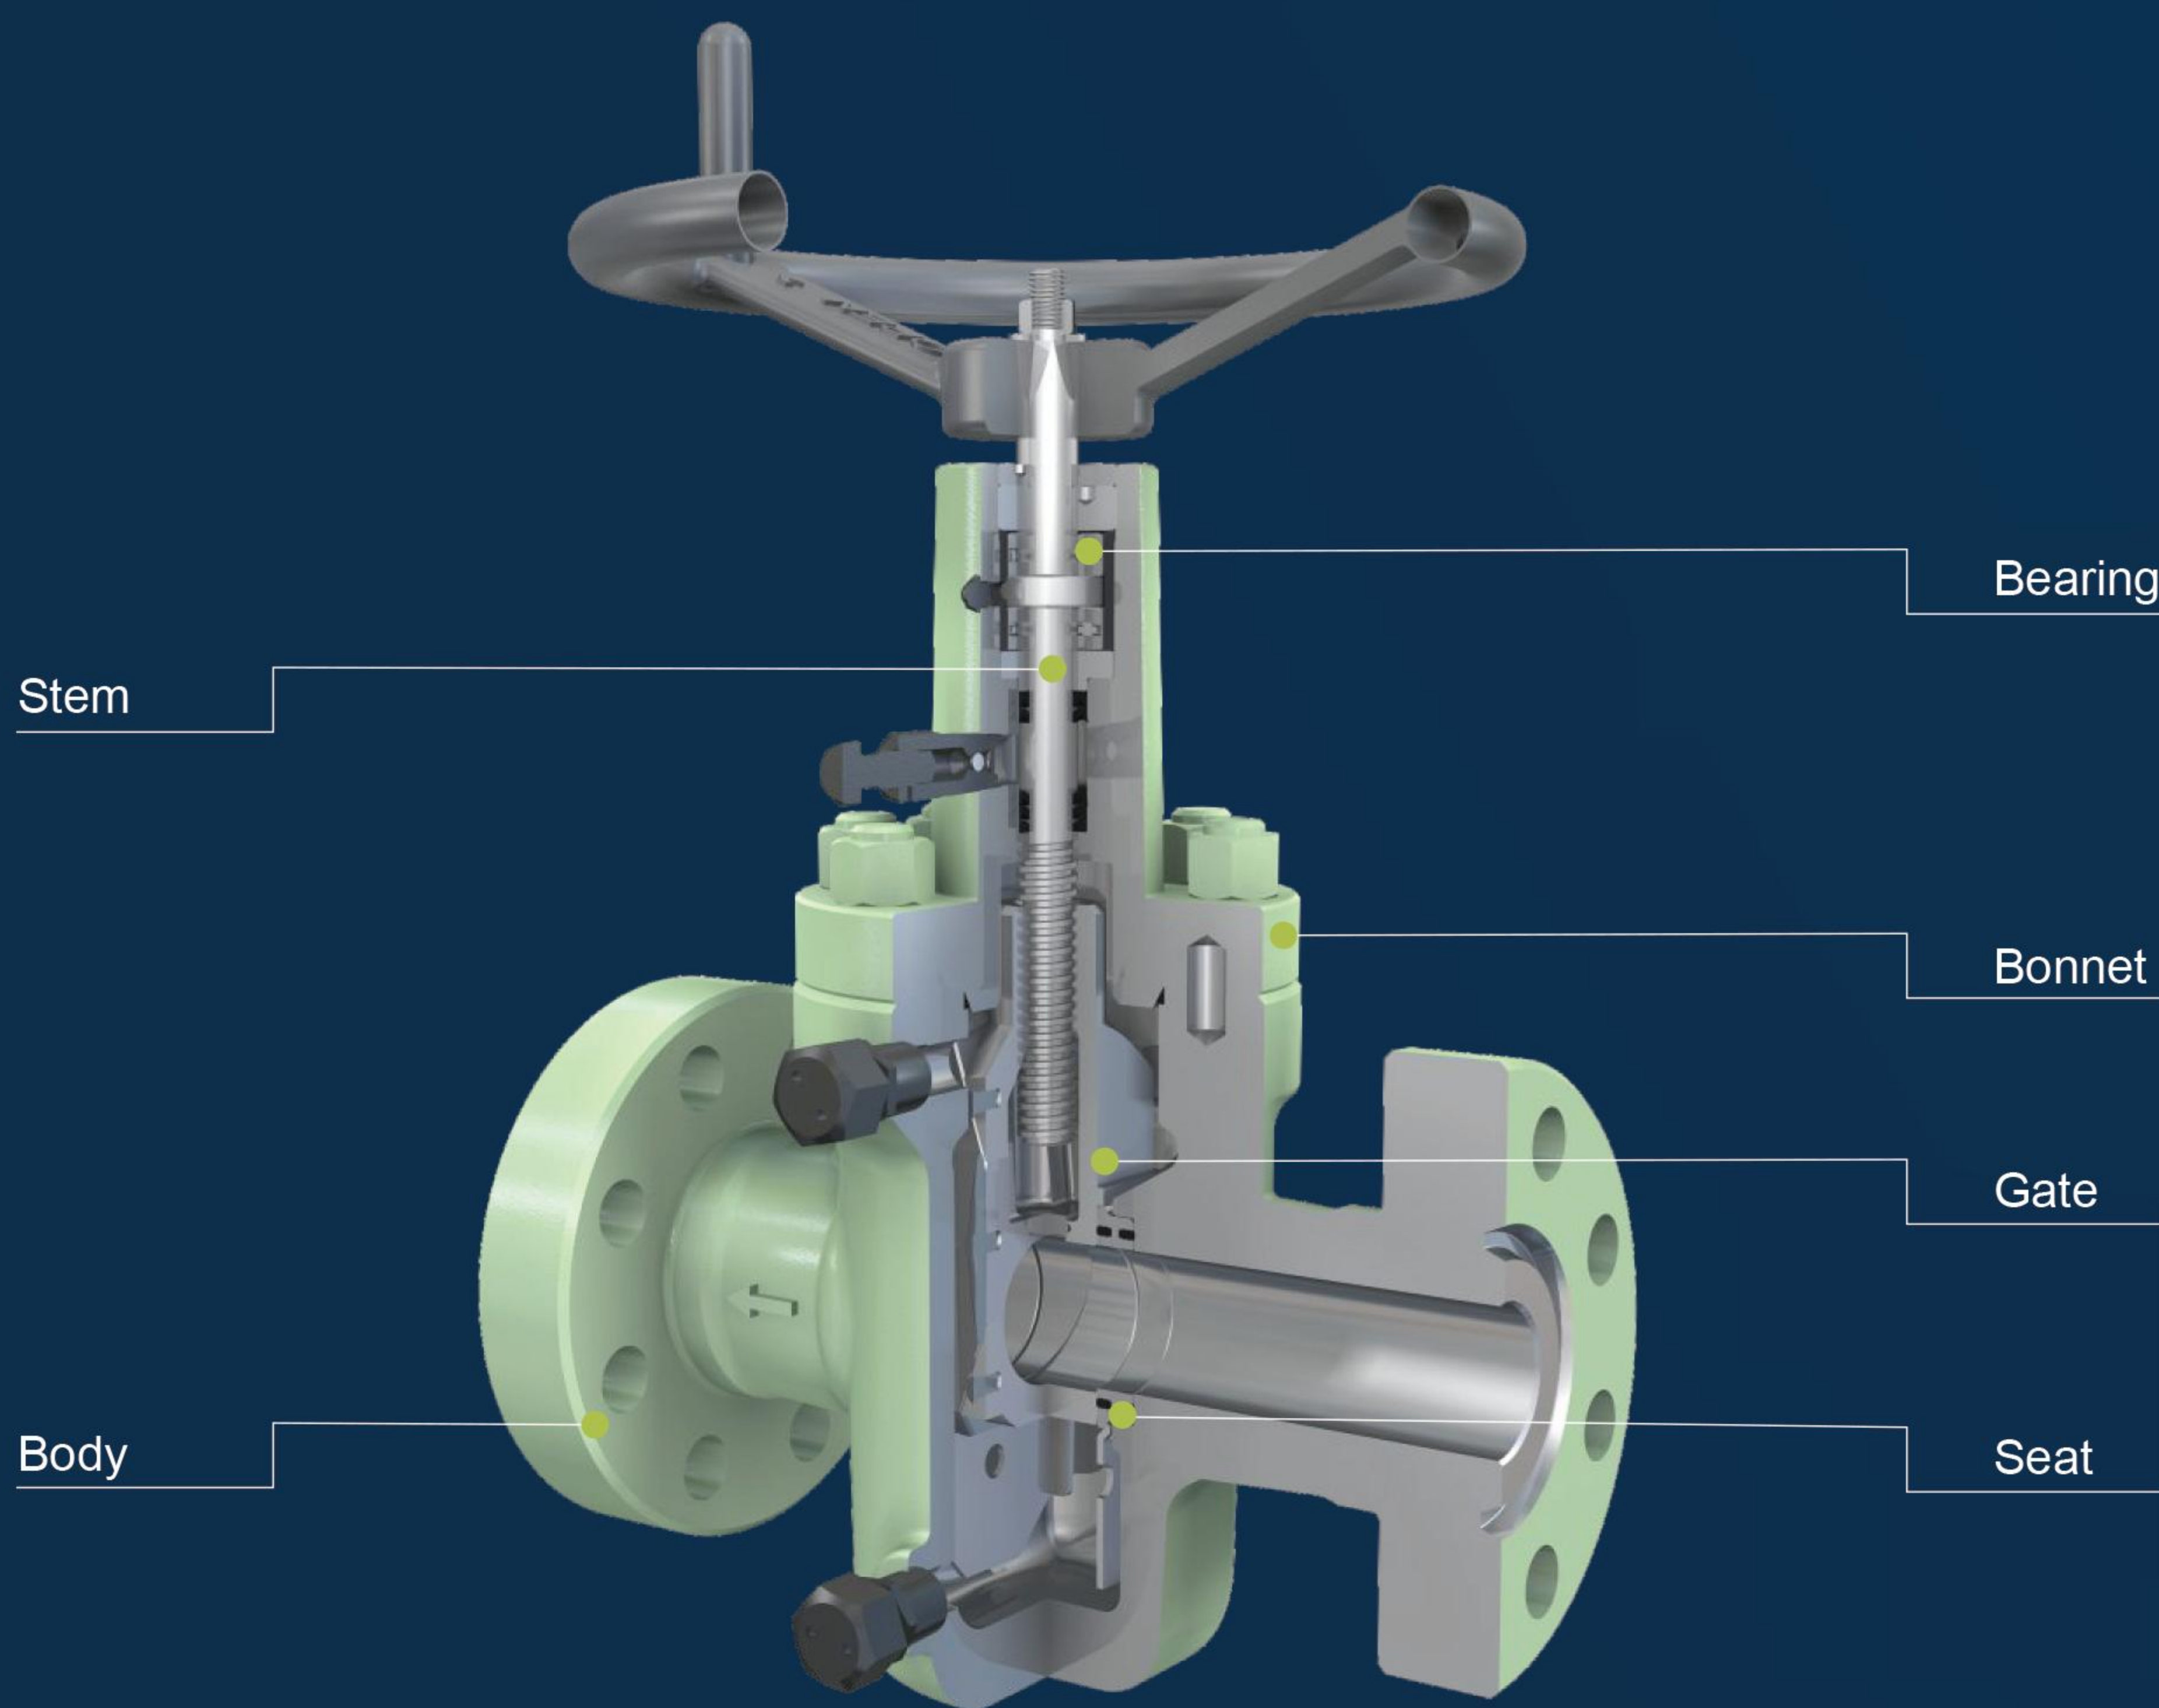


Advantage

- 1.Wedge Assy valve, Tight mechanical seal is assured with parallel expanding gate design.
- 2.ASTM A487-4C casting valve body or AISI 4130 forged valve body, forged valve cover.
- 3.Low operating torque, valve body and valve cover metal seal, with corrosion resistance, washing resistance, wear r-
esistance,
- 4.simple design and easy maintenance, ensuring low cost.



Standard	API Spec 6A, NACE MR0175
Work Pressure	2000PSI - 5000PSI
Nominal diameter	2-1/16", 3-1/8", 4-1/16", 5-1/8", 7-1/16"
Operation Method	Manual
Material Class	AA, BB, CC, DD, EE, FF
Temperature Class	PU LU X Y
Performance Class	PR1 - PR2
Specification Class	PSL1 - PSL3/PSL3G

Parameter

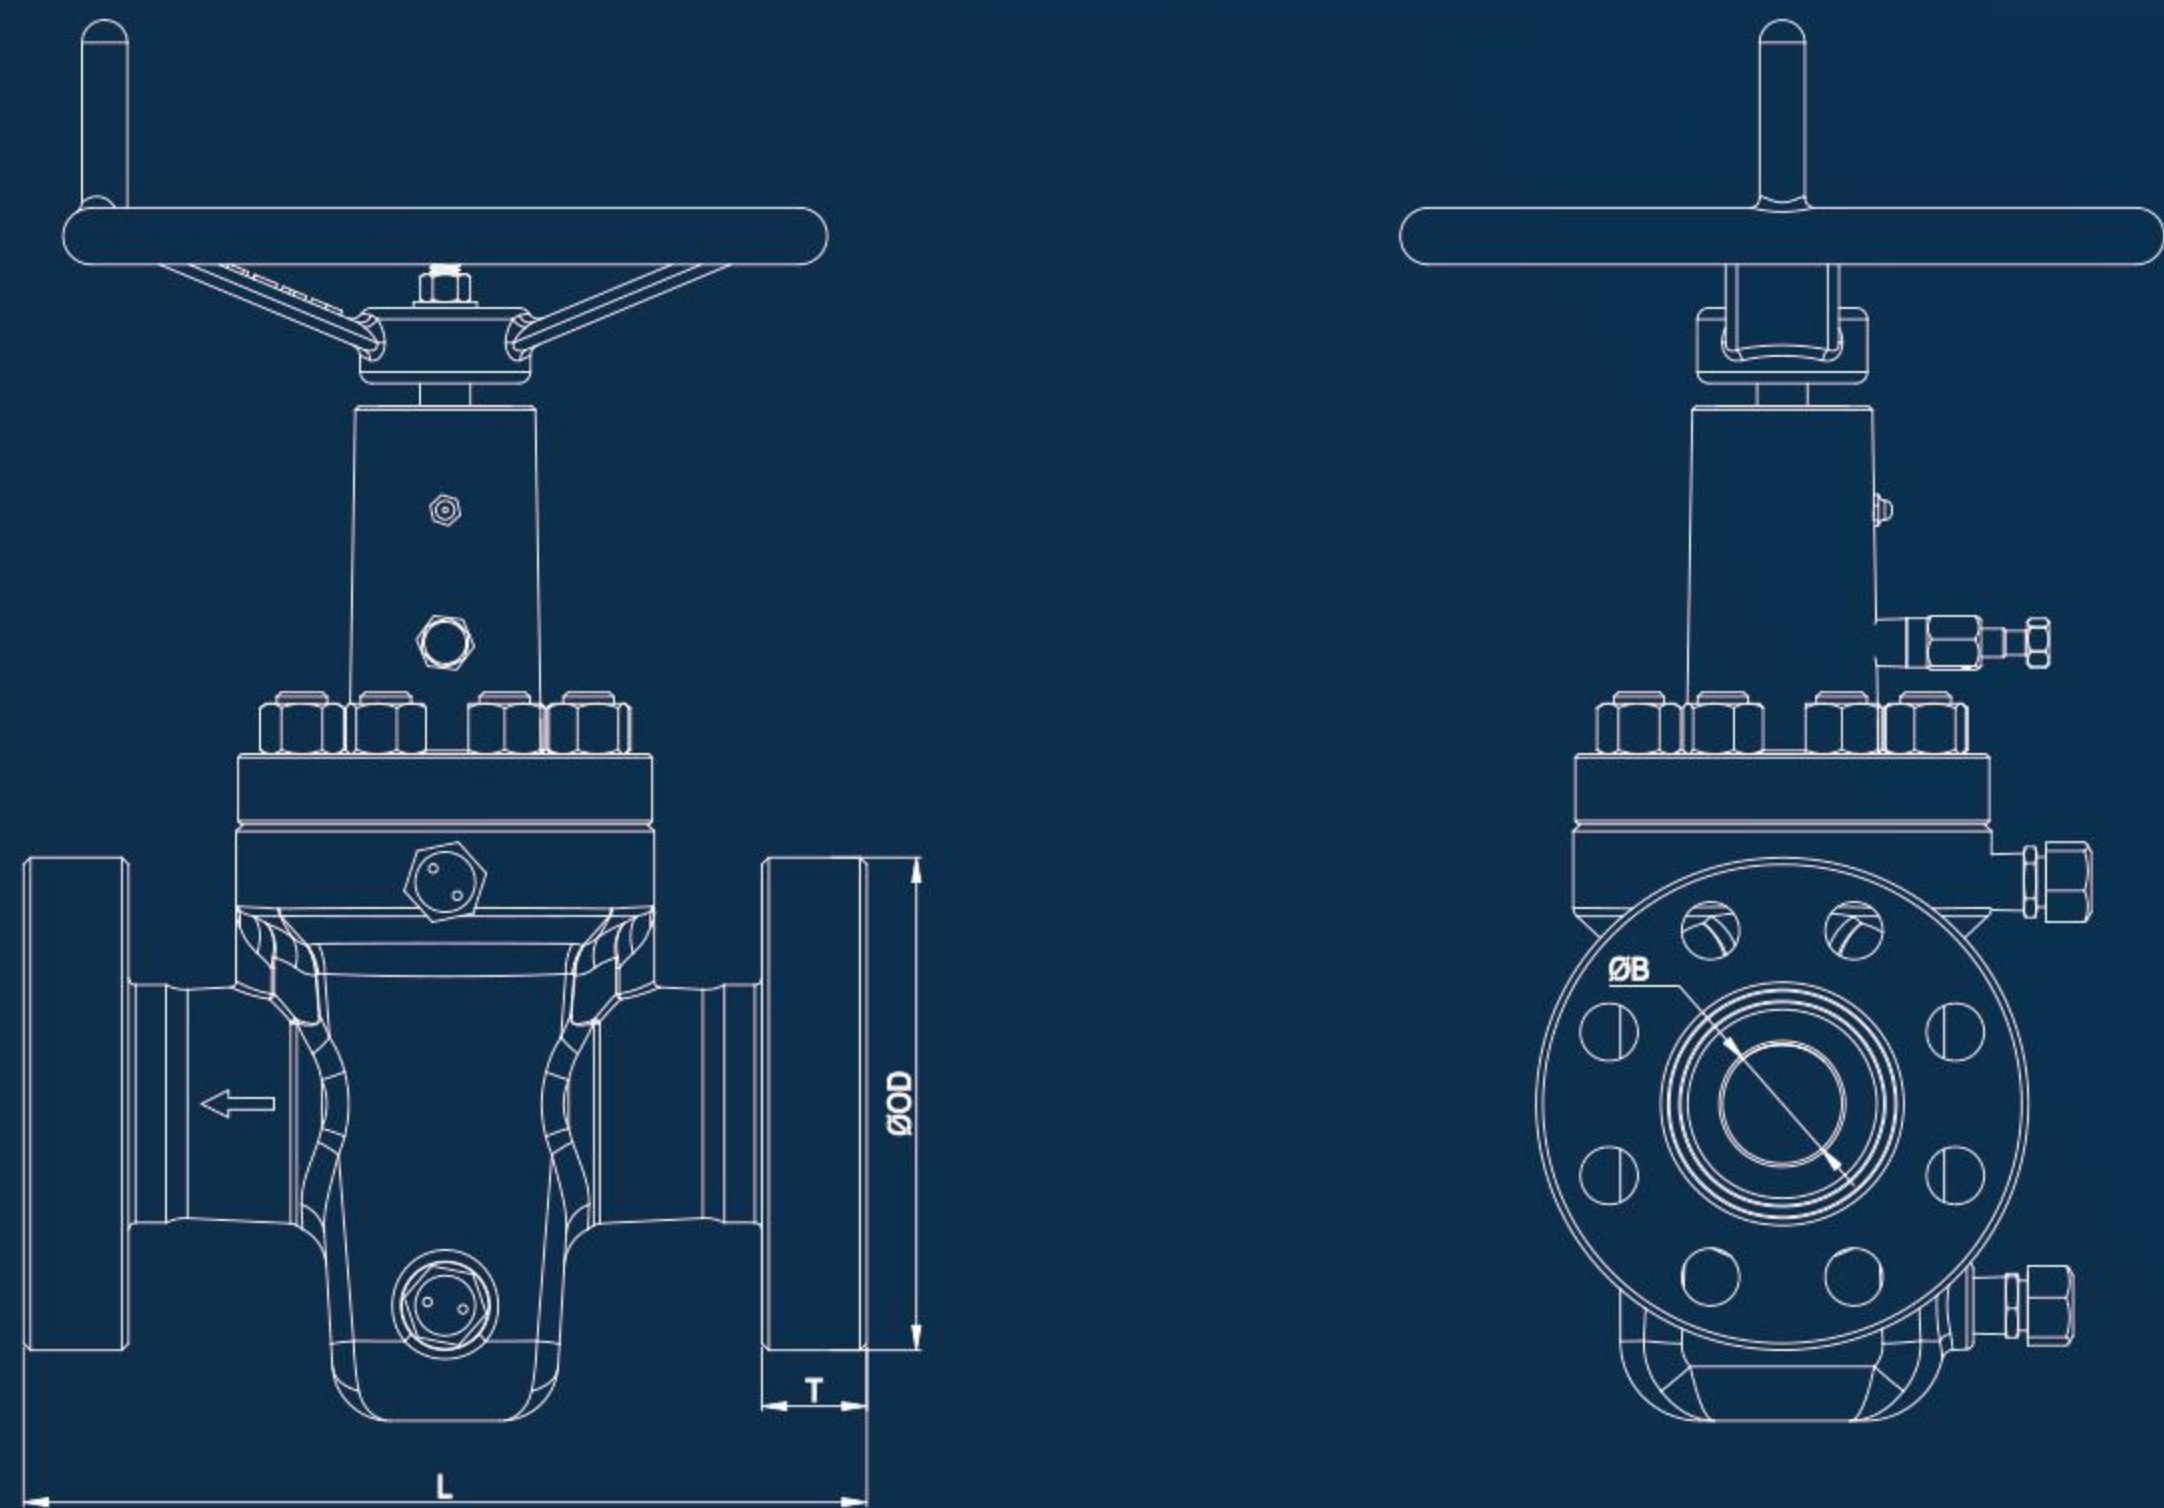

Work pressure 13.8Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	295.0	333.0	359.0	435.0	562.0	664.0
B	53.1	65.8	81.8	108.7	131.1	181.9
T	33.3	36.6	39.7	46.0	52.4	55.6
OD	165	191	210	273	330	356


Work pressure 20.7Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	371.0	422.0	435.0	511.0	613.0	714.0
B	53.1	65.8	81.8	108.7	131.1	181.9
T	46	49.3	46.0	52.4	58.7	63.5
OD	216	244	241	292	349	381

Work pressure 34.5Mpa mm

Flange size	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	371.0	422.0	473.0	549.0	727.0	813
B	53.1	65.8	81.8	108.7	131.1	181.9
T	46	49.3	55.7	62.0	81.0	92.0
OD	216	244	267	311	375	394

Parameter

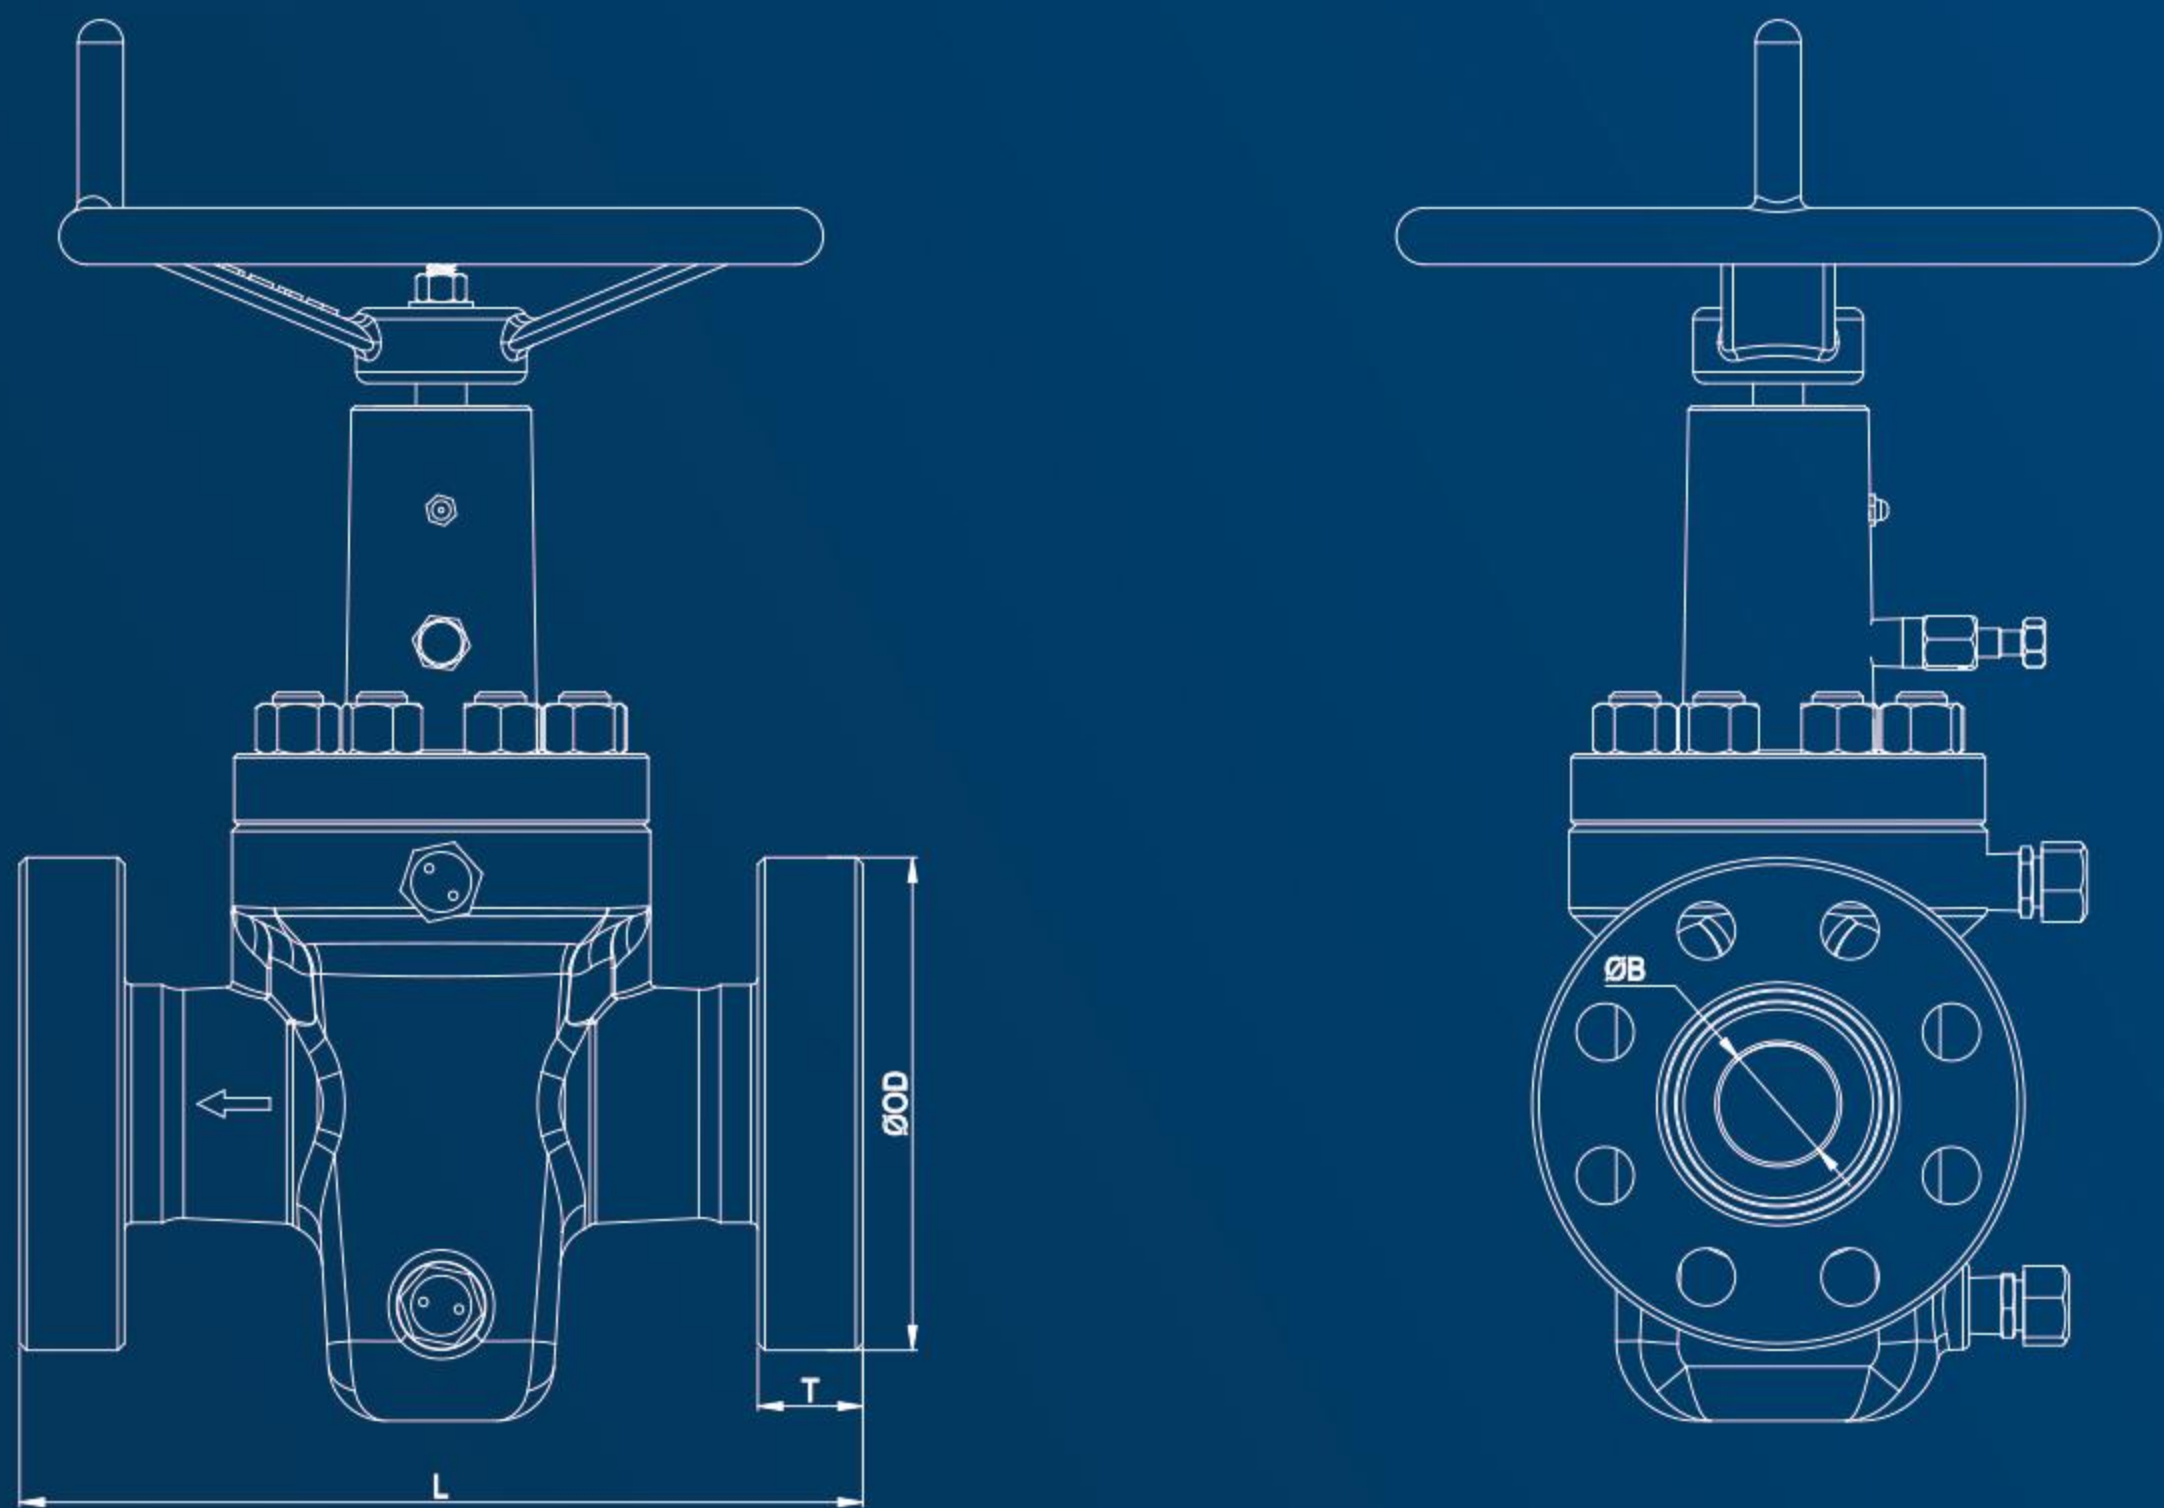

Work pressure 69.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	464	521	565	619	670	737	889
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	42.2	44.0	51.3	58.5	70.4	79.3	103.2
OD	187	200	232	270	316	357	480

Work pressure 103.5Mpa mm


Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	457	483	533	598	737	889	1041
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	45.3	50.8	57.2	64.3	78.5	98.6	119.1
OD	208	222	254	287	360	419	505

Work pressure 138.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	7-1/16
L	533	584	673	775	965	PMR
B	46.7	53.1	65.8	78.5	103.9	180.1
T	63.5	71.4	79.3	85.9	106.5	165.1
OD	257	287	325	357	446	656

Note: PMR: per manufacture's requirement 按制造商要求。

Parameter

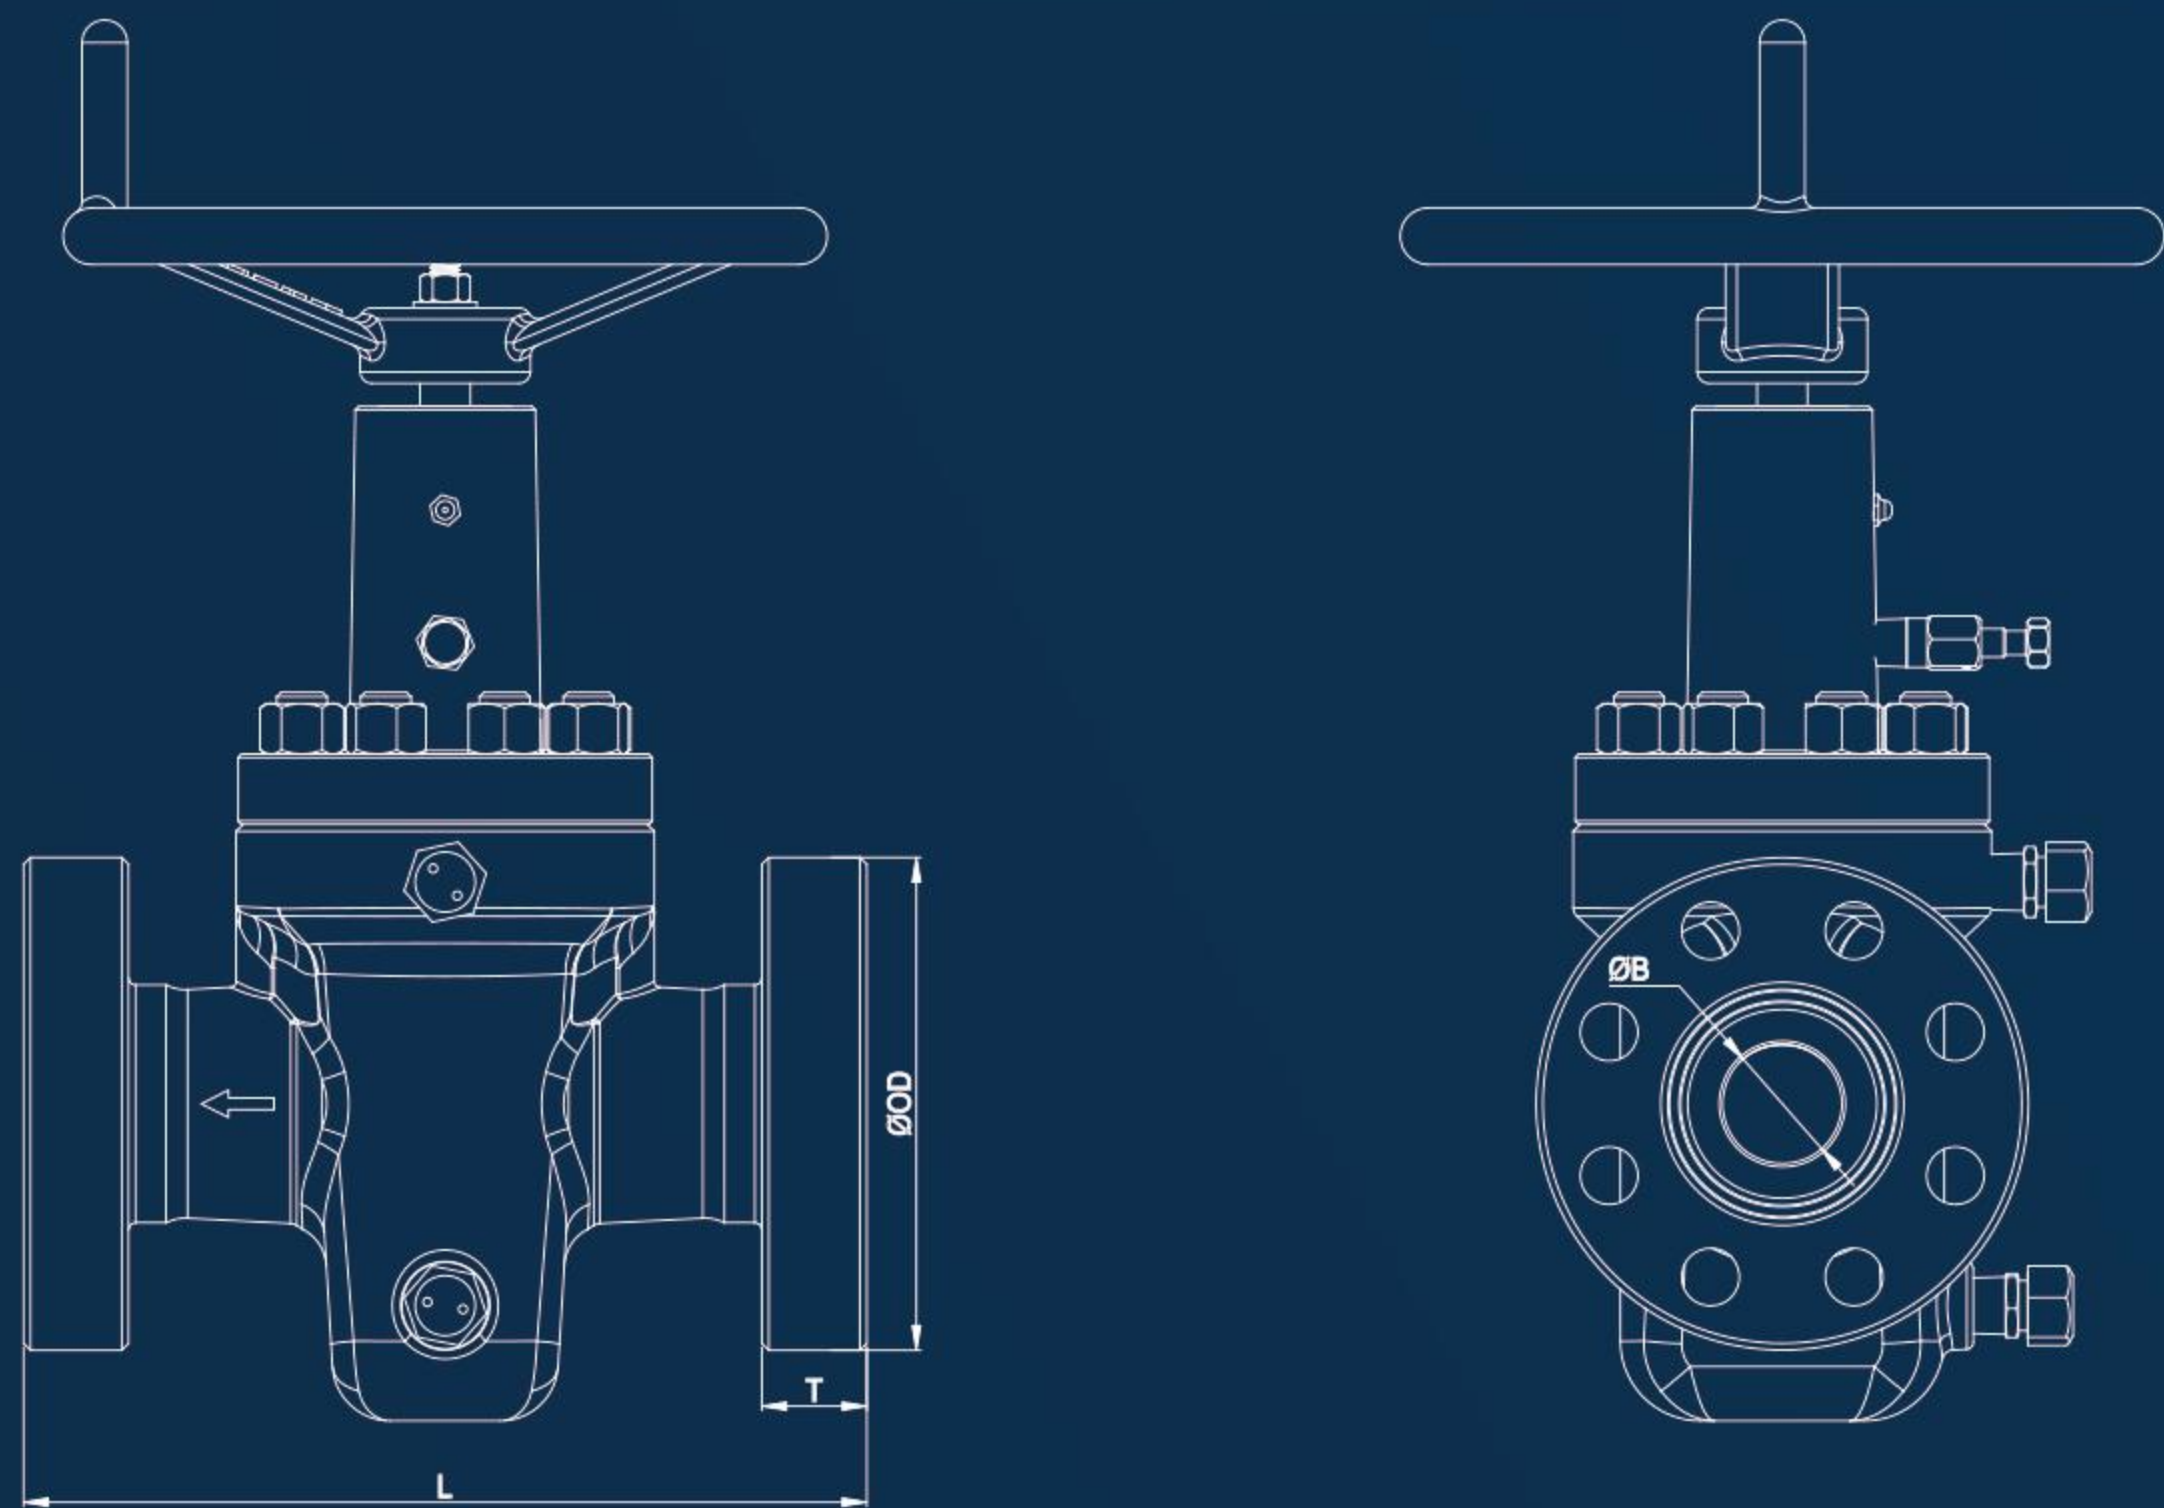

Work pressure 2000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	11.62	13.12	14.12	17.12	22.12	26.12
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.31	1.44	1.56	1.81	2.06	2.19
OD	6.50	7.50	8.25	10.75	13.00	14.00


Work pressure 3000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	14.62	16.62	17.12	20.12	24.12	28.12
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.81	1.94	1.81	2.06	2.31	2.5
OD	8.5	9.62	9.5	11.50	13.75	15.00

Work pressure 5000Psi in

Flange size	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	14.62	16.62	18.62	21.62	28.62	32.00
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.81	1.94	2.19	2.44	3.19	3.62
OD	8.50	9.62	10.50	12.25	14.75	15.5

Parameter

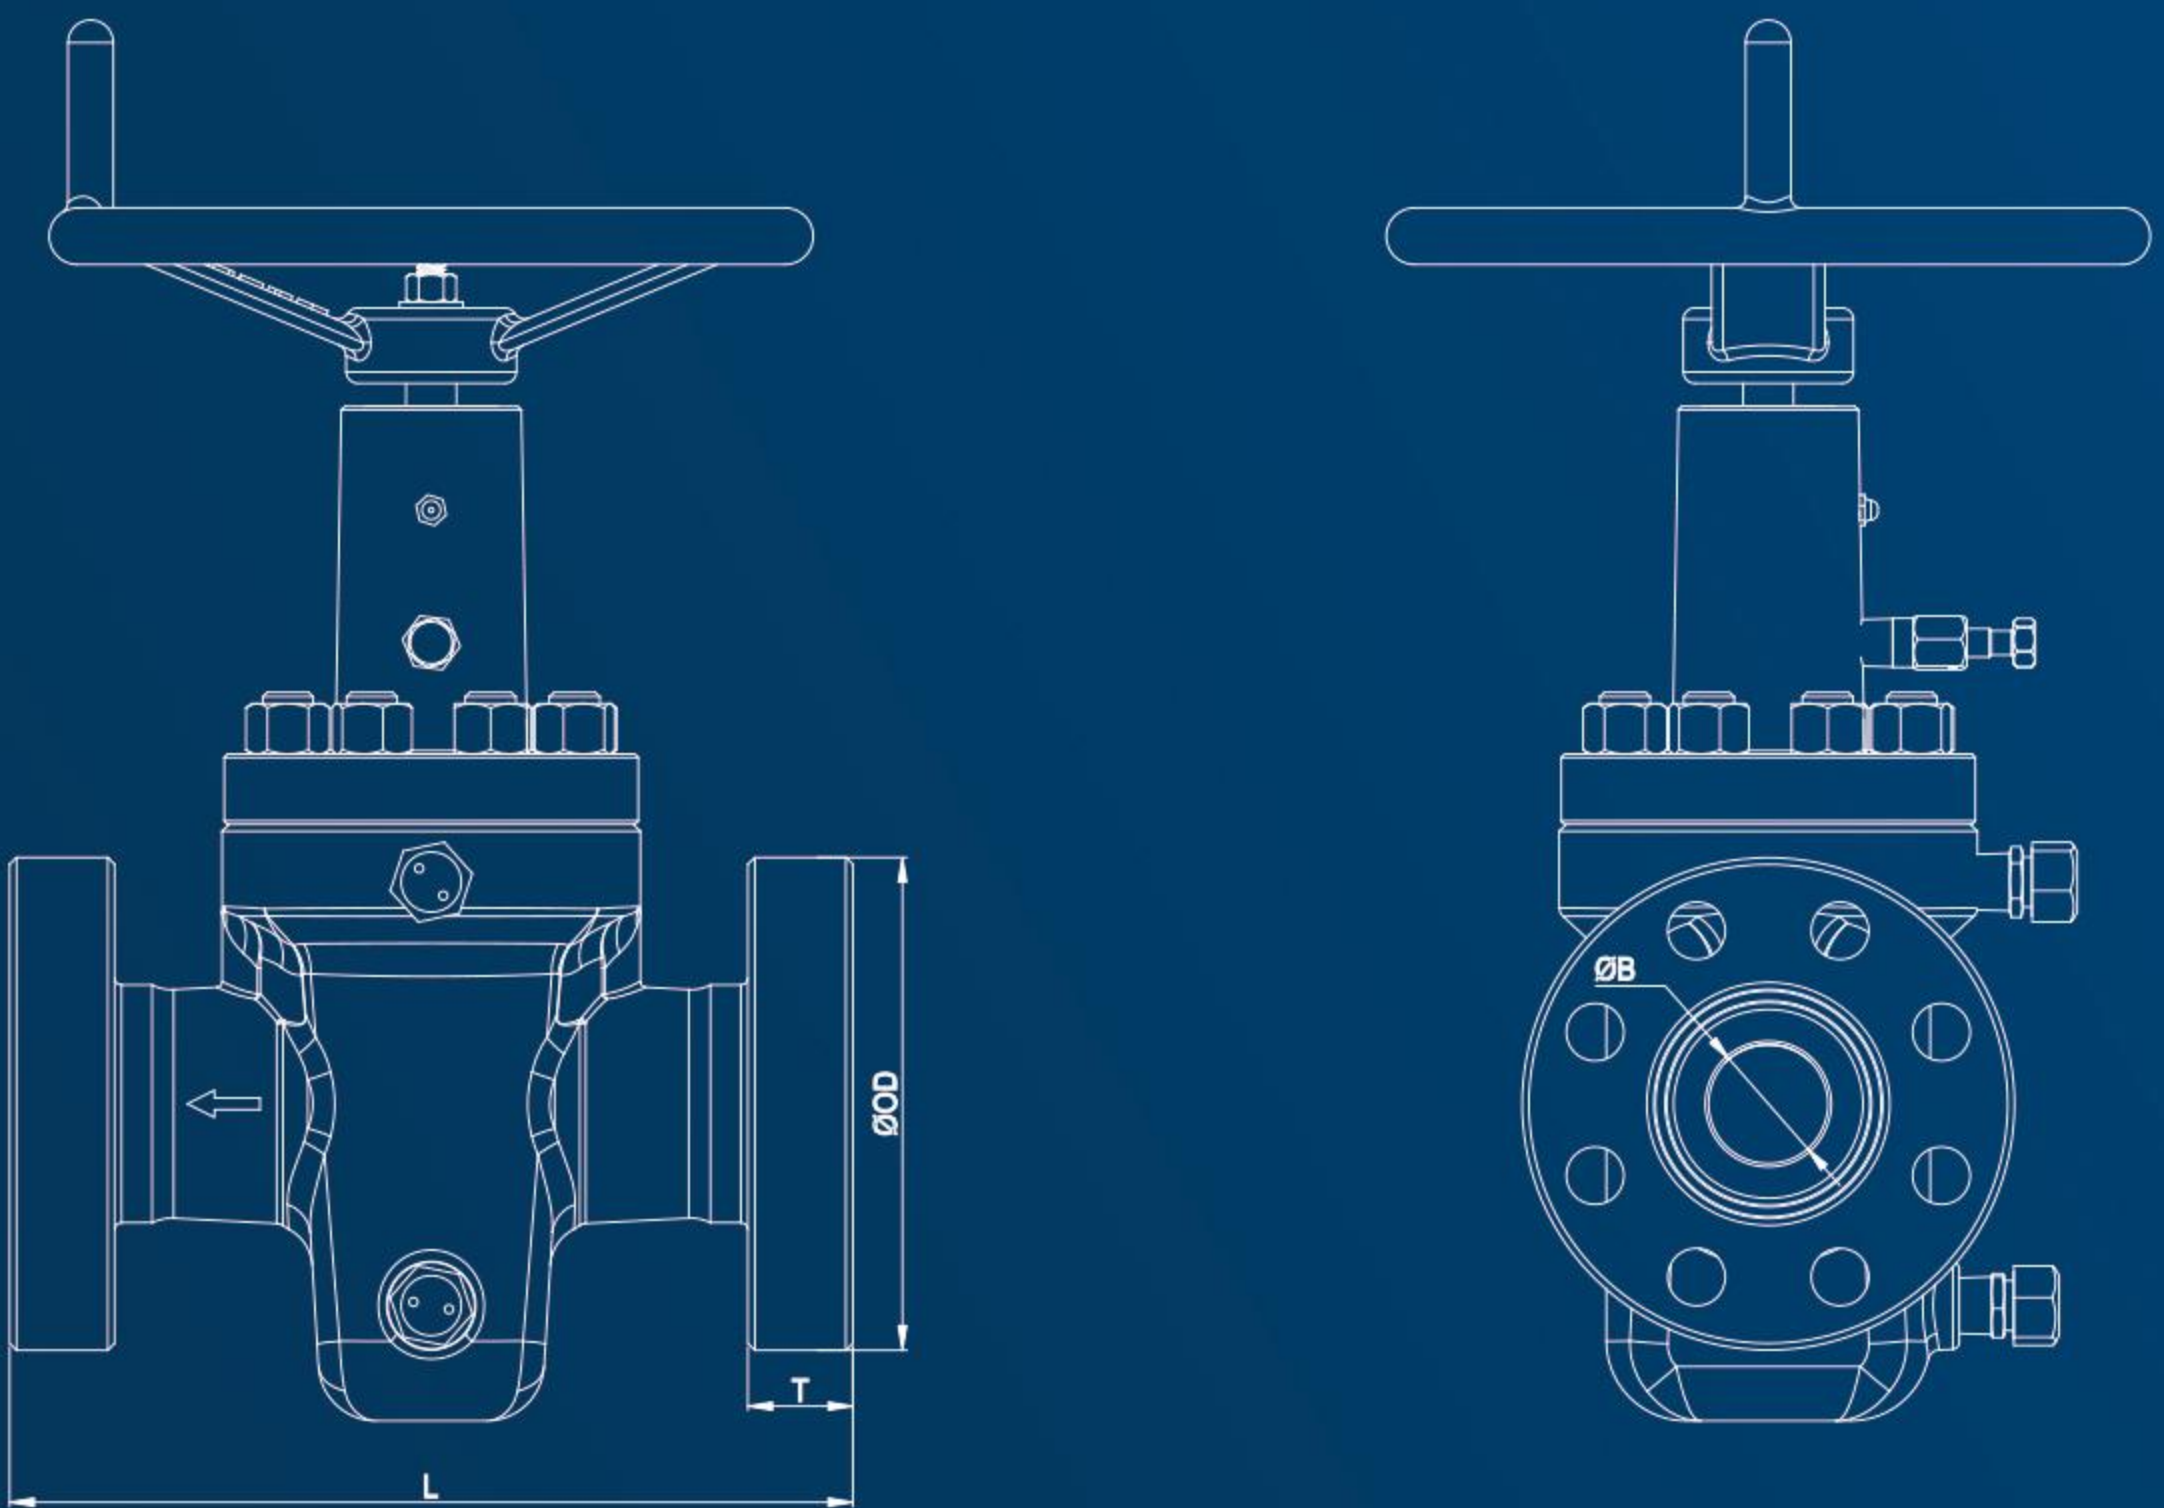

Work pressure 10000Psi in

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	18.25	20.50	22.25	24.38	26.38	29.00	35.00
B	1.81	2.06	2.56	3.06	4.06	5.12	7.06
T	1.66	1.73	2.02	2.30	2.77	3.12	4.06
OD	7.38	7.88	9.12	10.62	12.44	14.06	18.88

Work pressure 15000Psi in


Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	18.00	19.00	21.00	23.56	29.00	35.00	41.00
B	1.81	2.06	2.56	3.06	4.06	5.12	7.06
T	1.78	2.00	2.25	2.53	3.09	3.88	4.69
OD	8.19	8.75	10.00	11.31	14.19	16.5	19.88

Work pressure 138.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	7-1/16
L	21.00	23.00	28.50	30.50	38.00	PMR
B	1.81	2.06	2.56	3.06	4.06	7.06
T	2.50	2.81	3.12	3.38	4.19	6.5
OD	10.12	11.31	12.81	14.06	17.56	25.81

Note: PMR: per manufacture's requirement 按制造商要求。

API6A PLUG VALVE

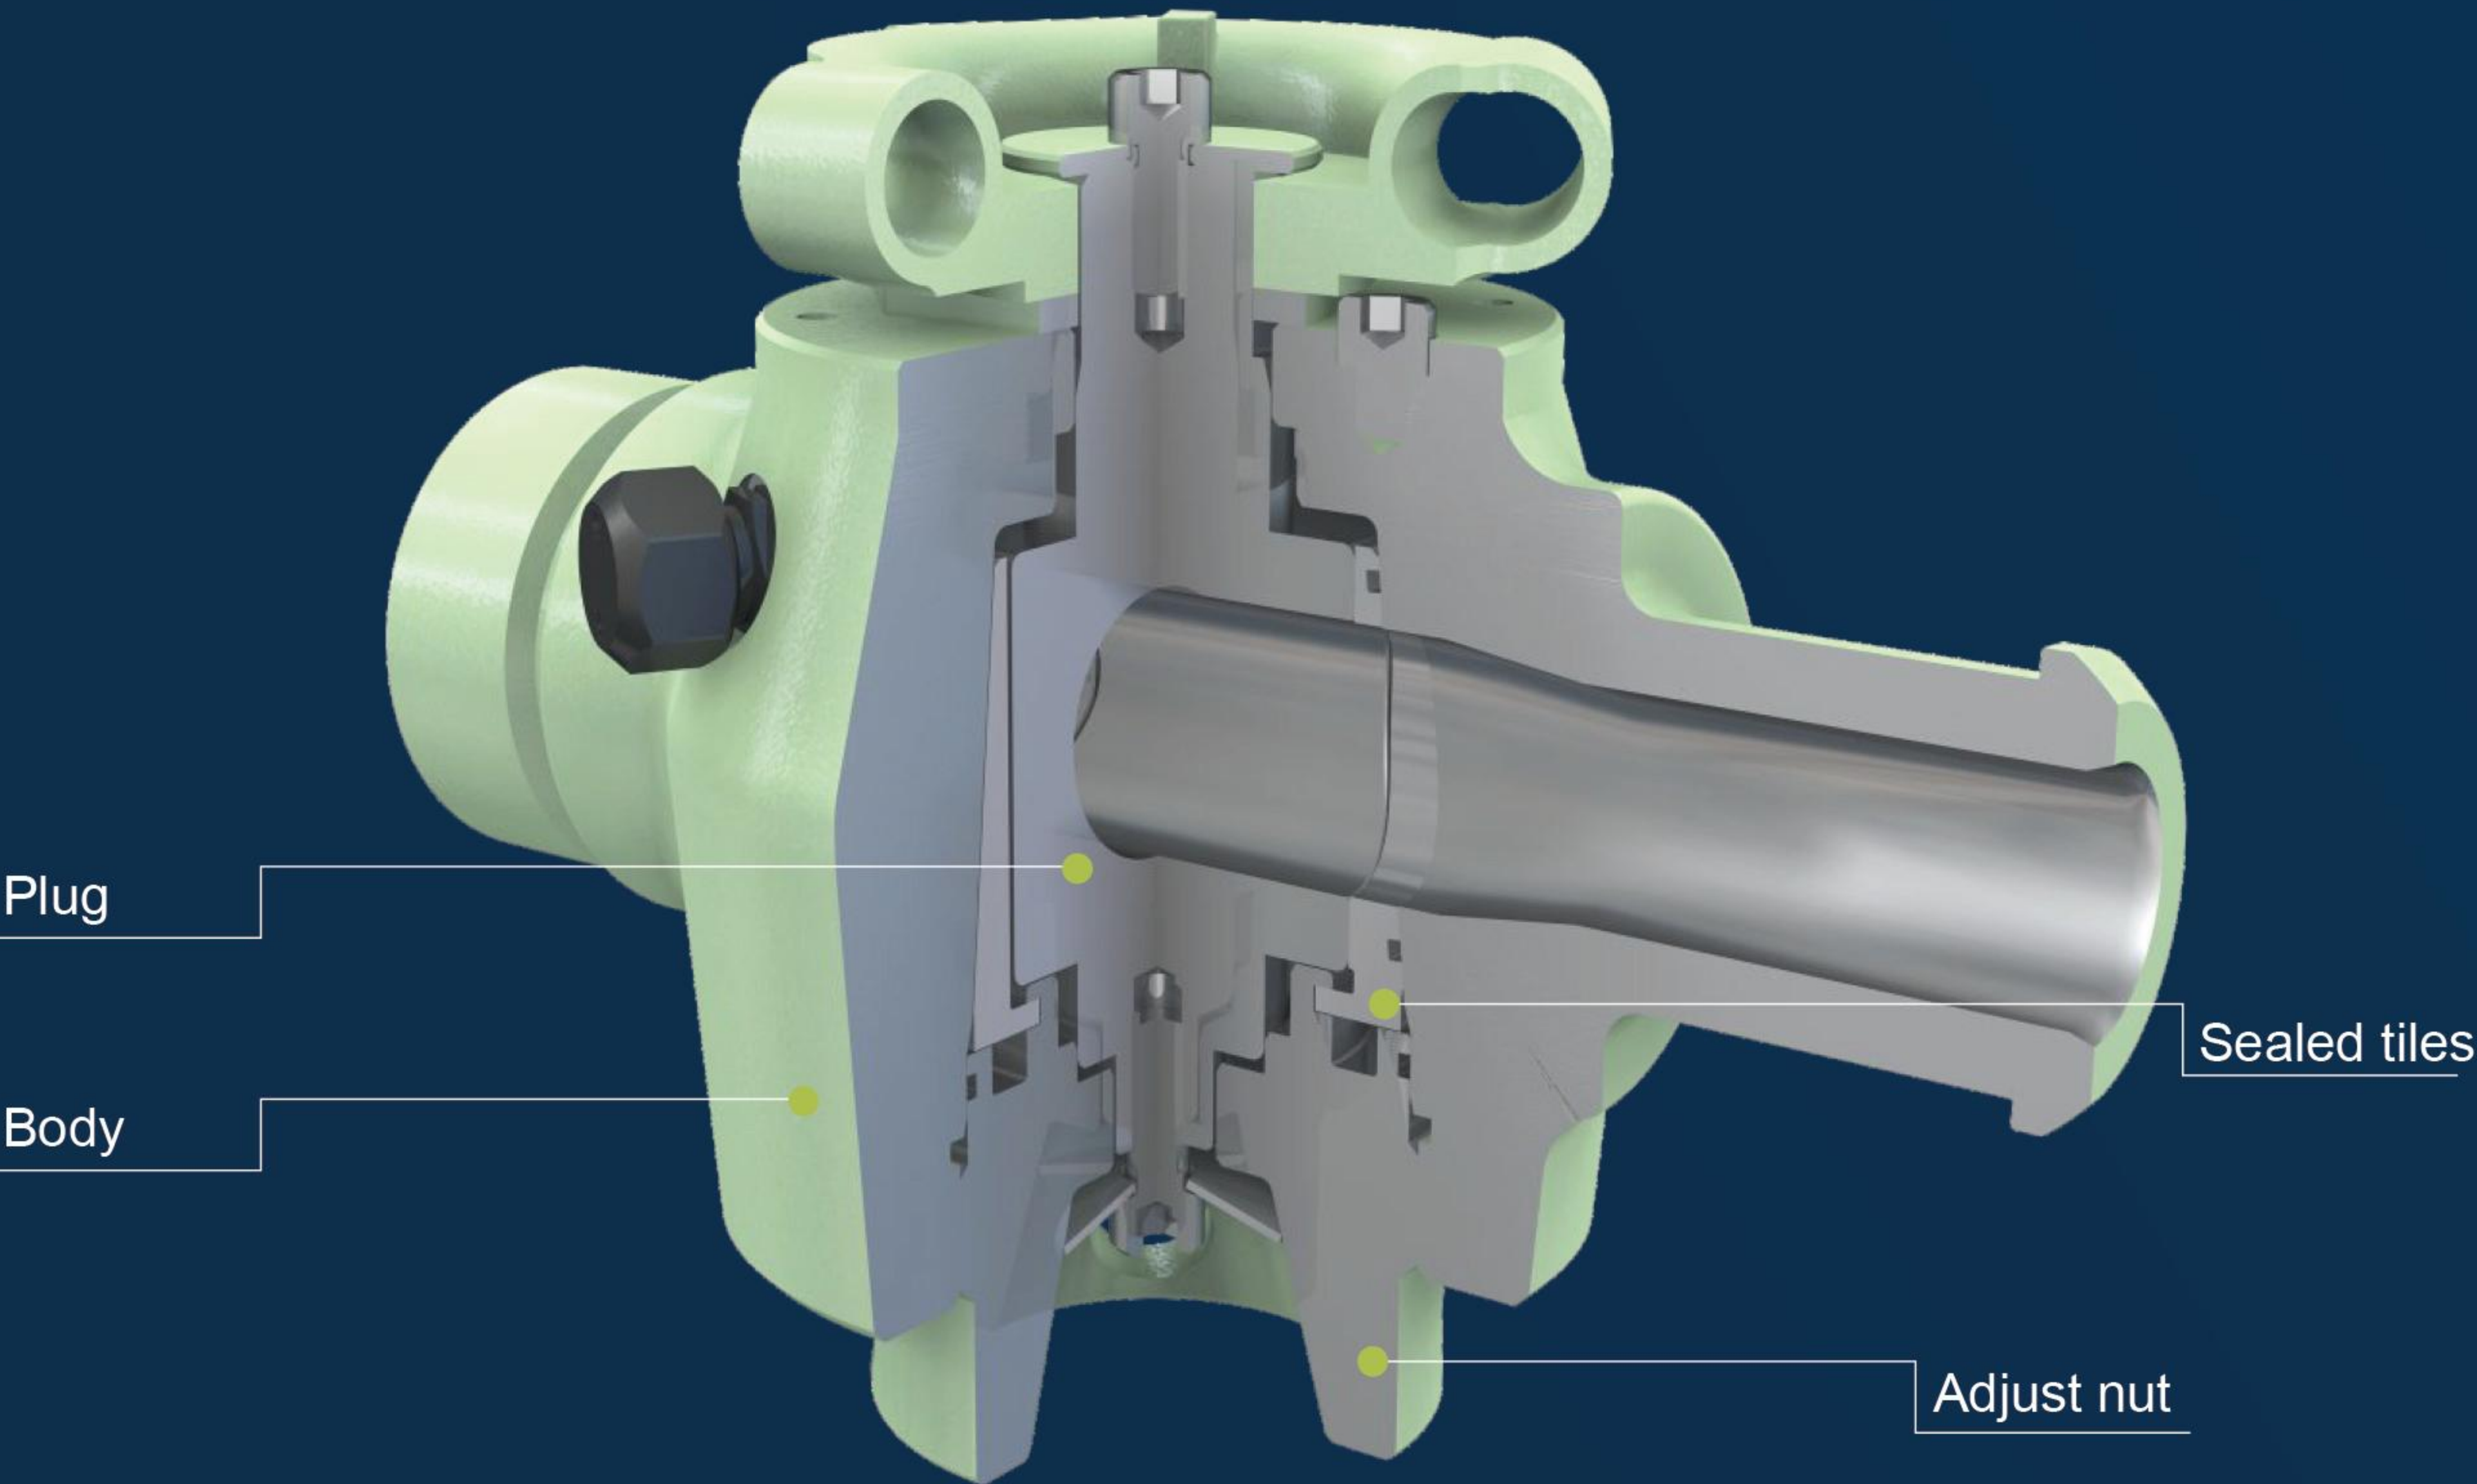

Advantage


The structure is simple and the external size is small.

- 1.The valve is used for frequent operation, which opens and closes quickly and is light.
- 2.The fluid resistance of the valve is small.
- 3.According to the convenience, a variety of connection methods such as non, thread, flange, etc. can be adopted.

Standard	API 6A / GB/T 12224
Work pressure	3000PSI - 15000PSI
Nominal diameter	1 " ~ 4 "
Operation Method	Manual



Parameter

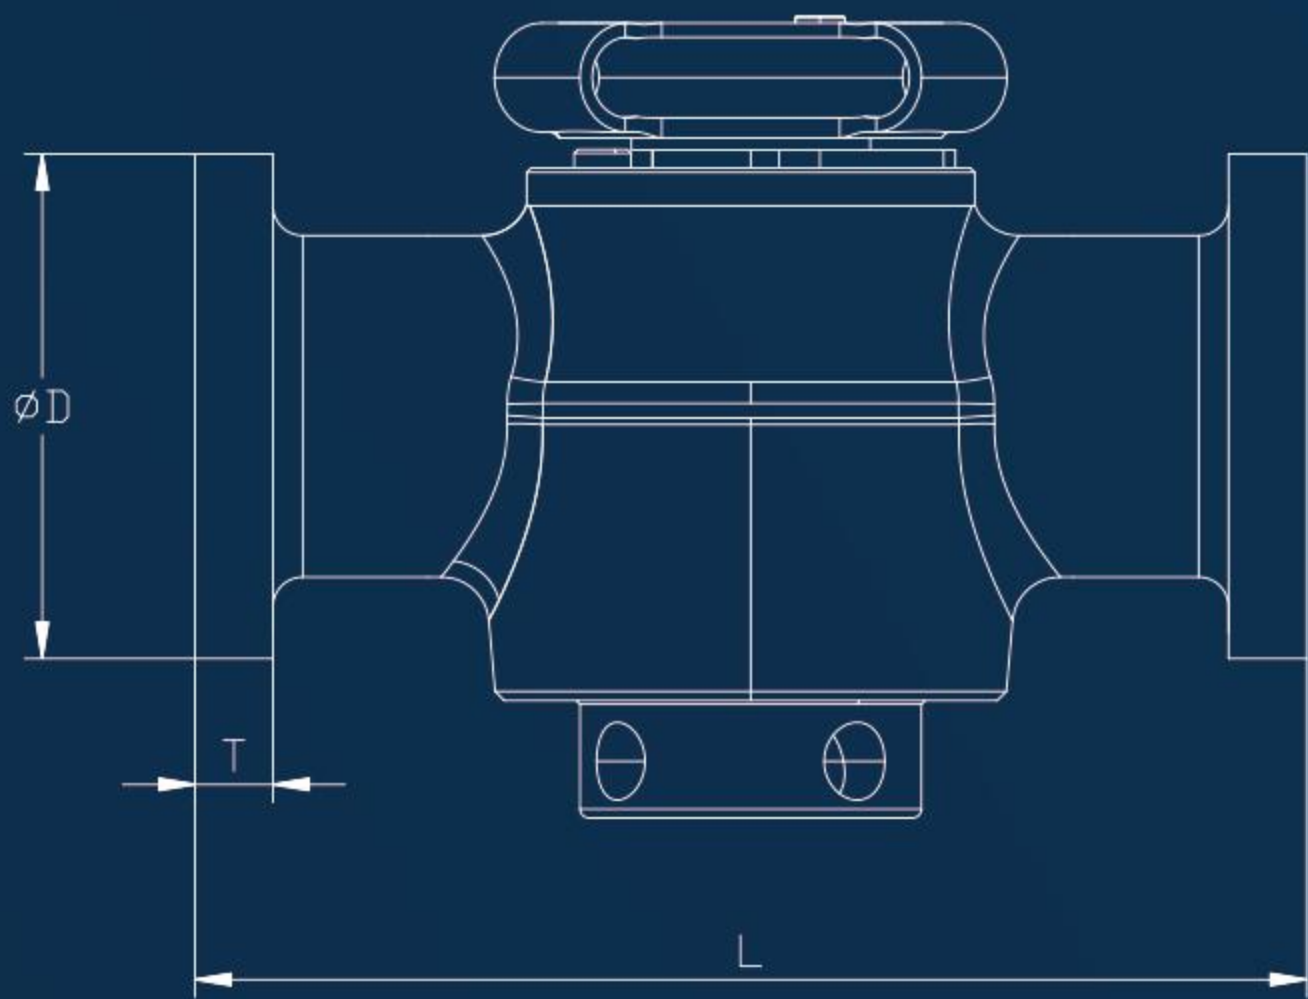

Work pressure 20.7Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16
L	384.0	435.0	473.0	562.0
B	52.4	65.1	79.3	103.2
T	46	49.3	46.0	52.4
OD	216	244	241	292

Work pressure 34.5Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16
L	394.0	457.0	527.0	629.0
B	52.4	65.1	79.3	103.2
T	46	49.3	55.7	62.0
OD	216	244	267	311


Work pressure 69.0Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16
L	521.0	565.0	619.0	670.0
B	52.4	65.1	77.7	103.2
T	44.0	51.3	58.5	70.4
OD	200	232	270	316

Work pressure 103.5Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16
L	483.0	533.0	598.0	737.0
B	52.4	65.1	77.7	103.2
T	50.8	57.2	64.3	78.5
OD	222	254	287	360

Parameter

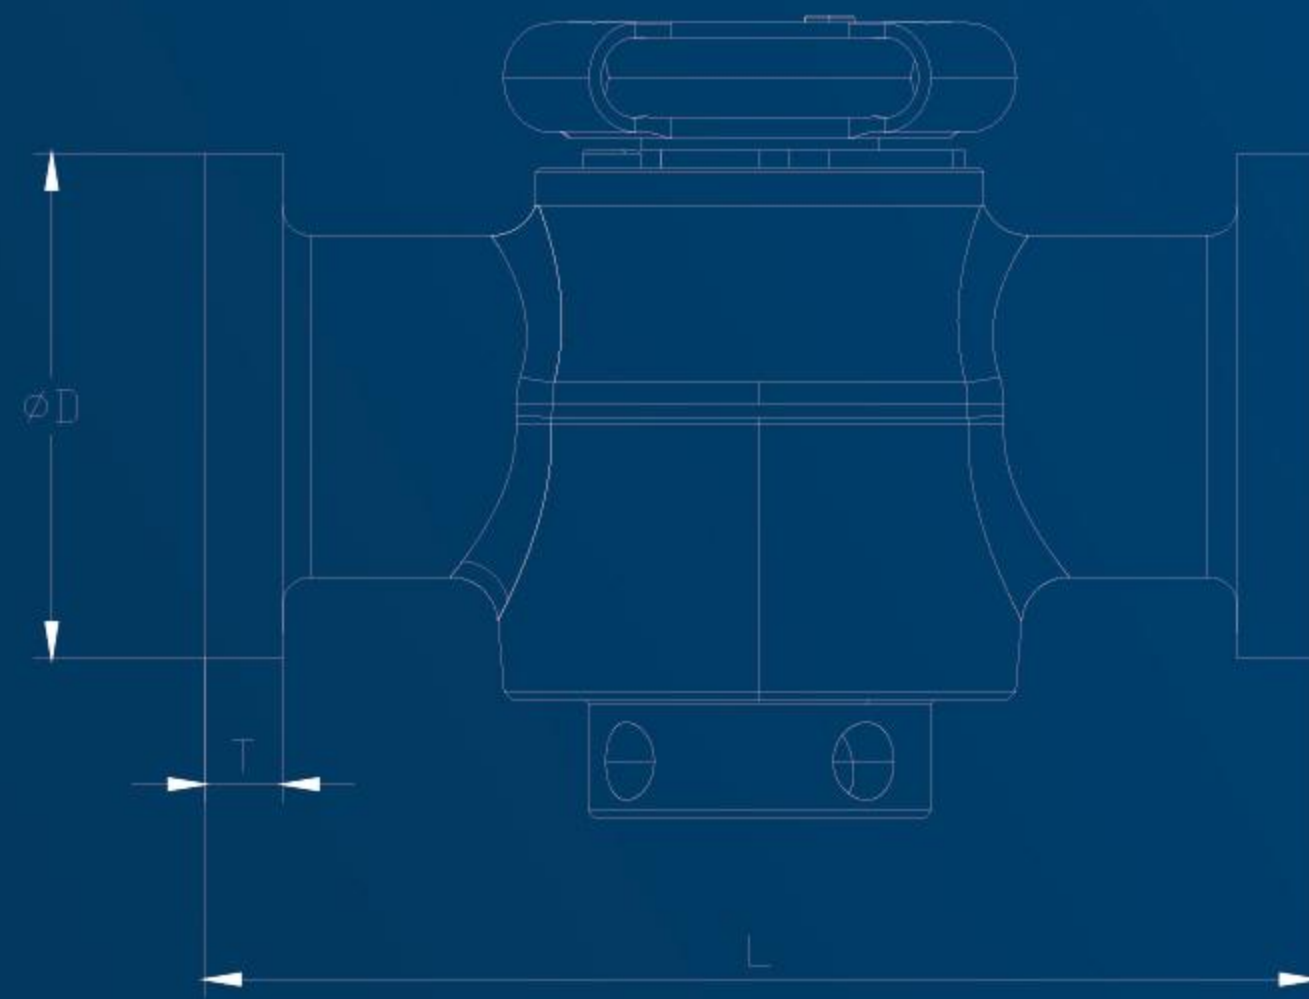

Work pressure 3000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16
L	15.12	17.12	18.62	22.12
B	2.08	2.56	3.12	4.06
T	1.81	1.94	1.81	2.06
OD	8.5	9.62	9.5	11.50

Work pressure 5000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16
L	15.50	18.00	20.75	24.75
B	2.08	2.56	3.12	4.06
T	1.81	1.94	2.19	2.44
OD	8.50	9.62	10.50	12.25


Work pressure 10000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16
L	20.50	22.25	24.38	26.38
B	2.08	2.56	3.06	4.06
T	1.73	2.02	2.30	2.77
OD	7.88	9.12	10.62	12.44

Work pressure 15000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16
L	19.00	21.00	23.56	29.00
B	2.08	2.56	3.06	4.06
T	2.00	2.25	2.53	3.09
OD	8.75	10.00	11.31	14.19


DIAPHRAGM ACTUATORS GATE VALVE

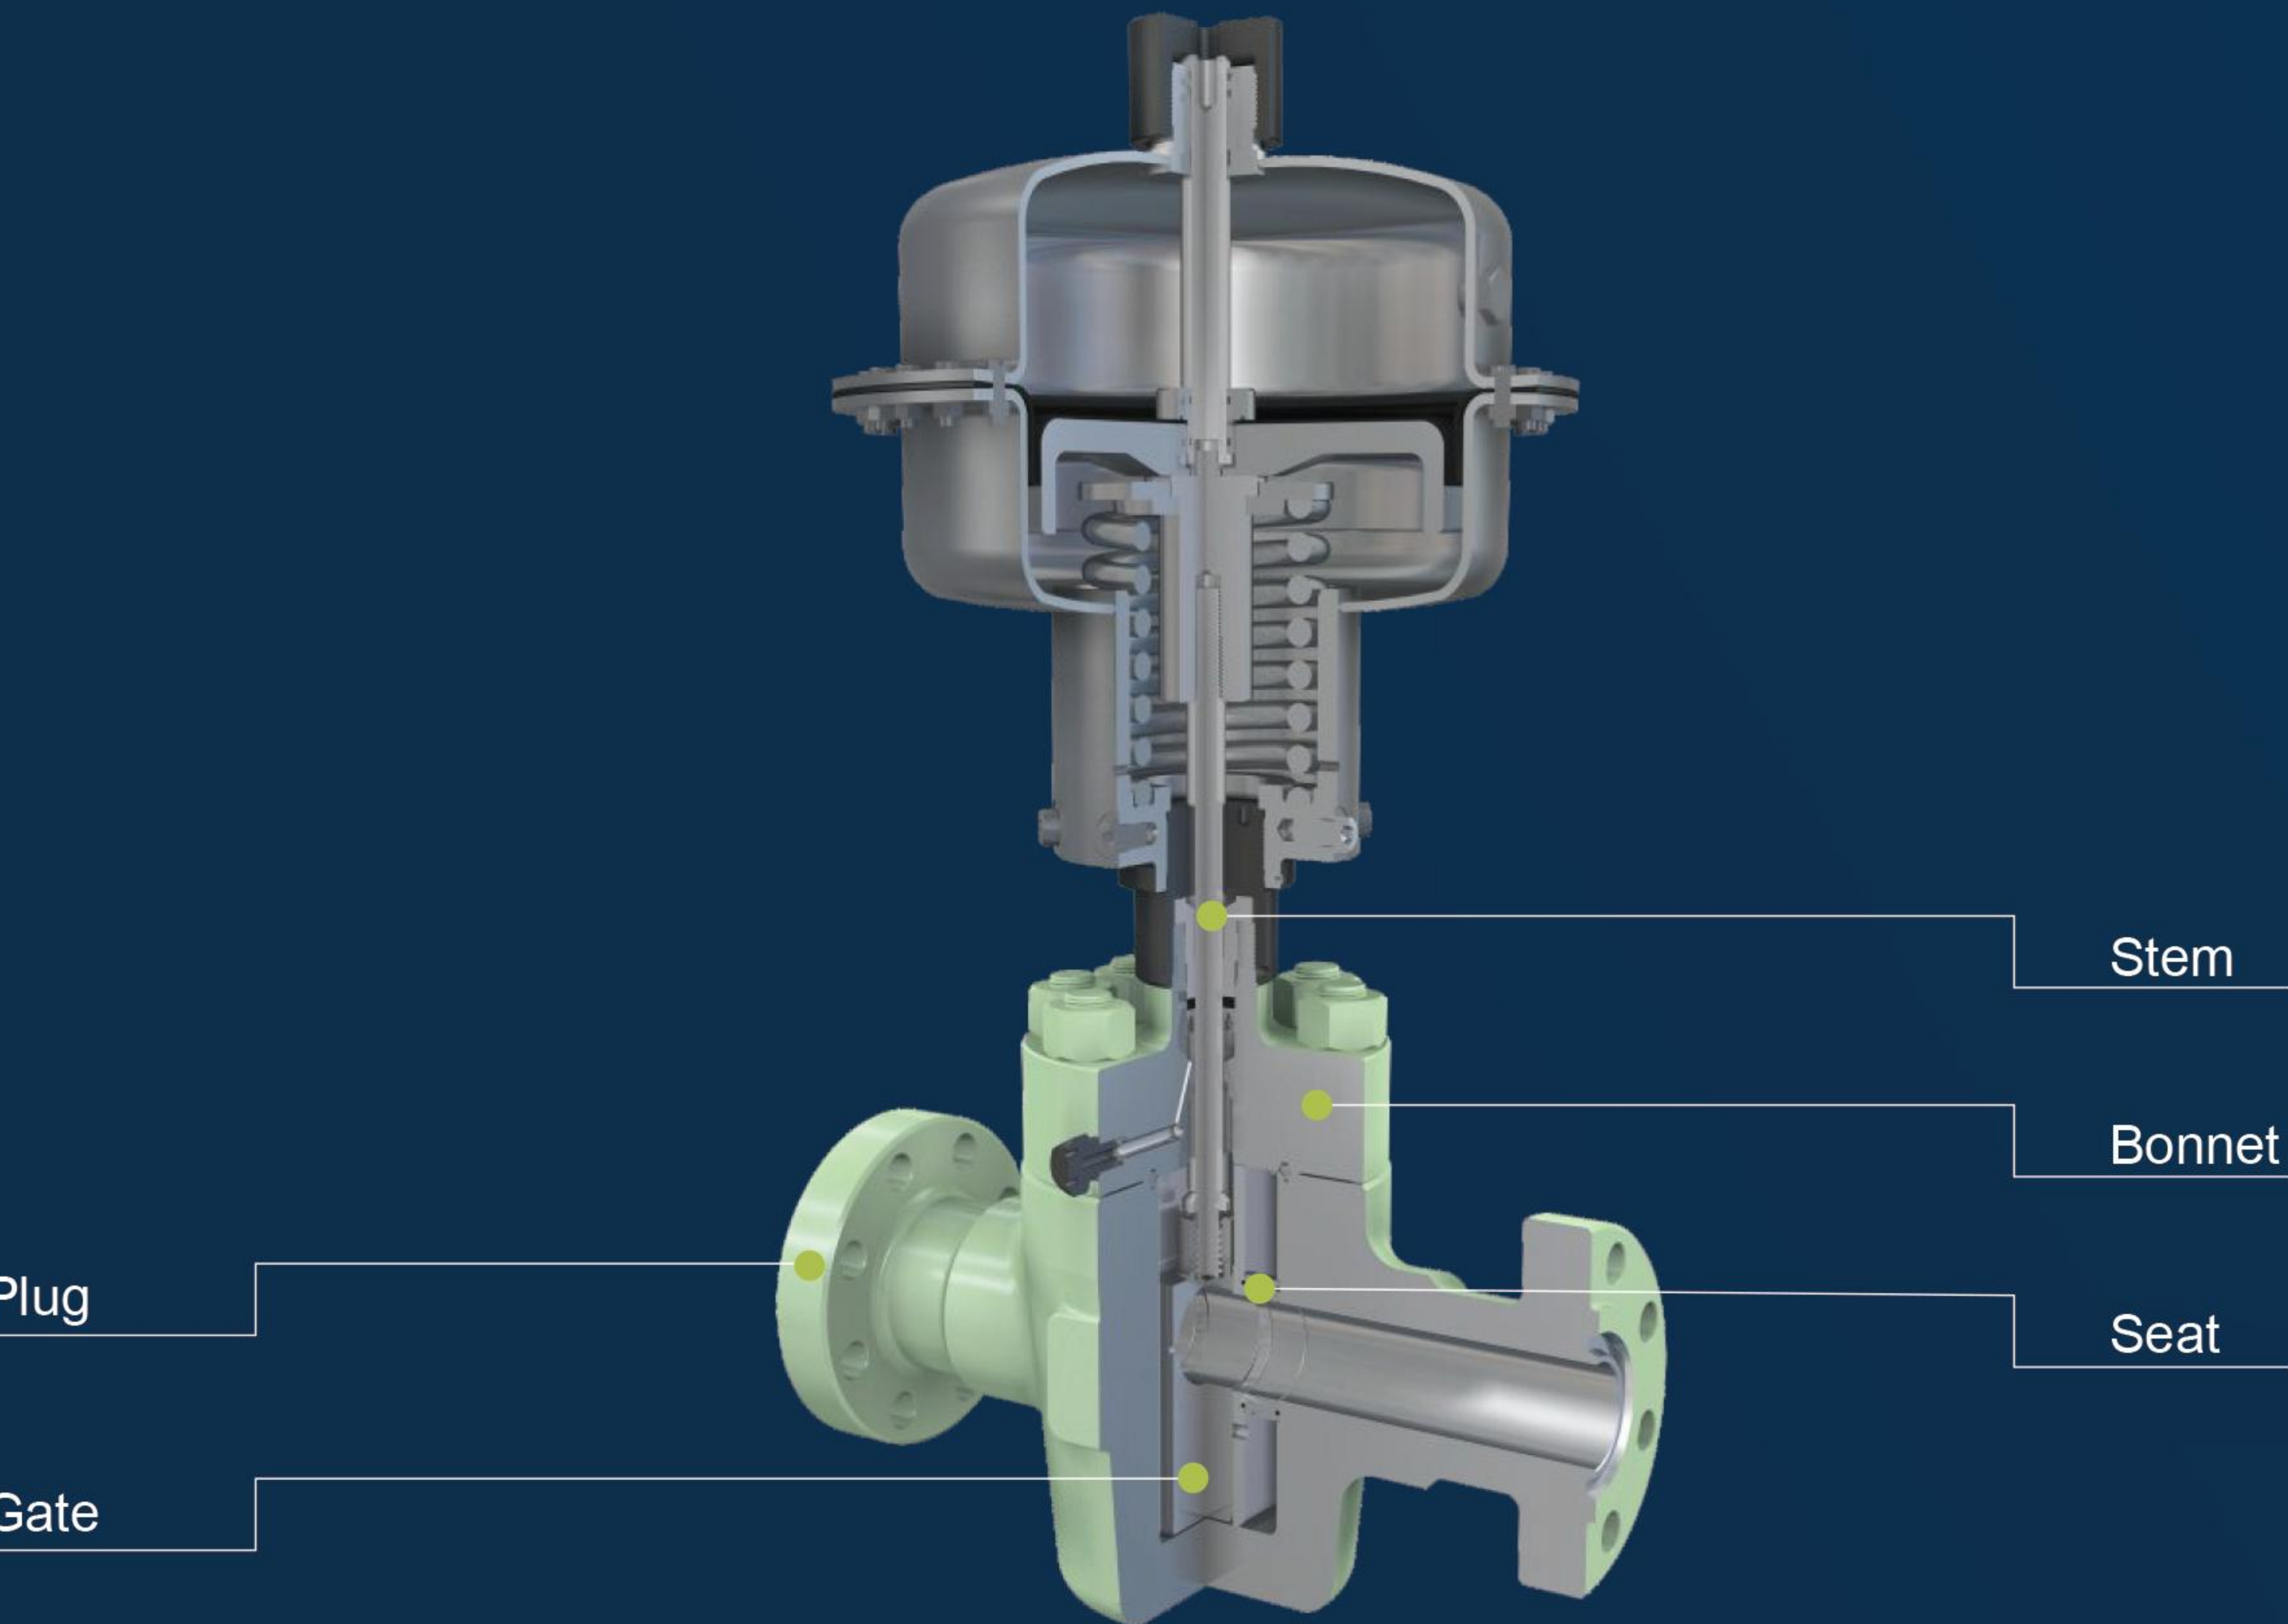

Standard	API Spec 6A, NACE MR0175
Work Pressure	2000PSI - 15000PSI
Nominal diameter	1-13/16", 2-1/16", 3-1/8", 3-1/16", 4-1/16", 5-1/8"
Material Class	AA, BB, CC, DD, EE, FF, HH
Temperature Class	PU LU
Performance Class	PR1 - PR2
Specification Class	PSL1 - PSL3/PSL3G



Parameter

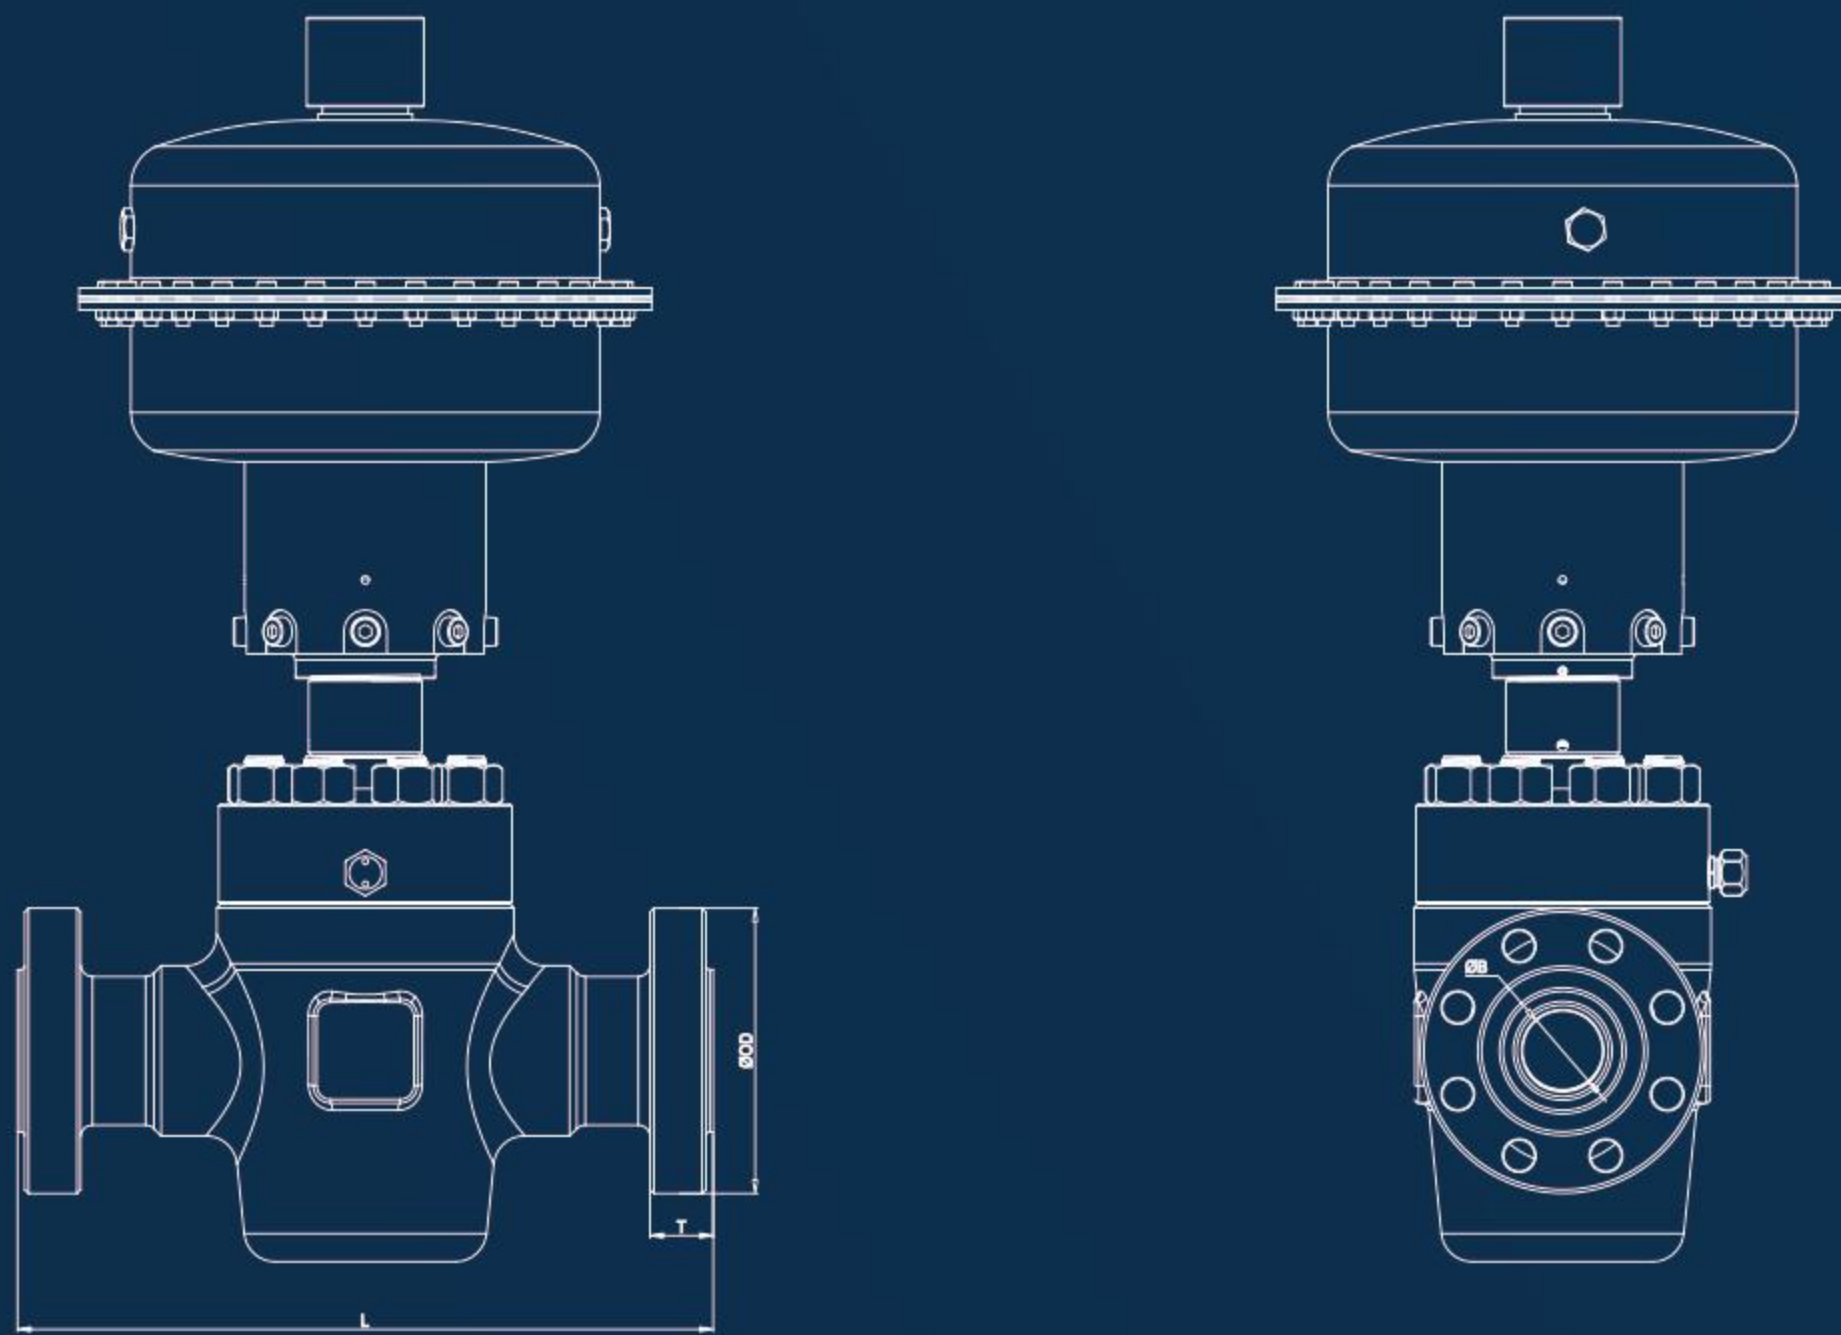

Work pressure 13.8Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	295.0	333.0	359.0	435.0	562.0	664.0
B	53.1	65.8	81.8	108.7	131.1	181.9
T	33.3	36.6	39.7	46.0	52.4	55.6
OD	165	191	210	273	330	356


Work pressure 20.7Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	371.0	422.0	435.0	511.0	613.0	714.0
B	53.1	65.8	81.8	108.7	131.1	181.9
T	46	49.3	46.0	52.4	58.7	63.5
OD	216	244	241	292	349	381

Work pressure 34.5Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	371.0	422.0	473.0	549.0	727.0	813.0
B	53.1	65.8	81.8	108.7	131.1	181.9
T	46	49.3	55.7	62.0	81.0	92.0
OD	216	244	267	311	375	394

Parameter

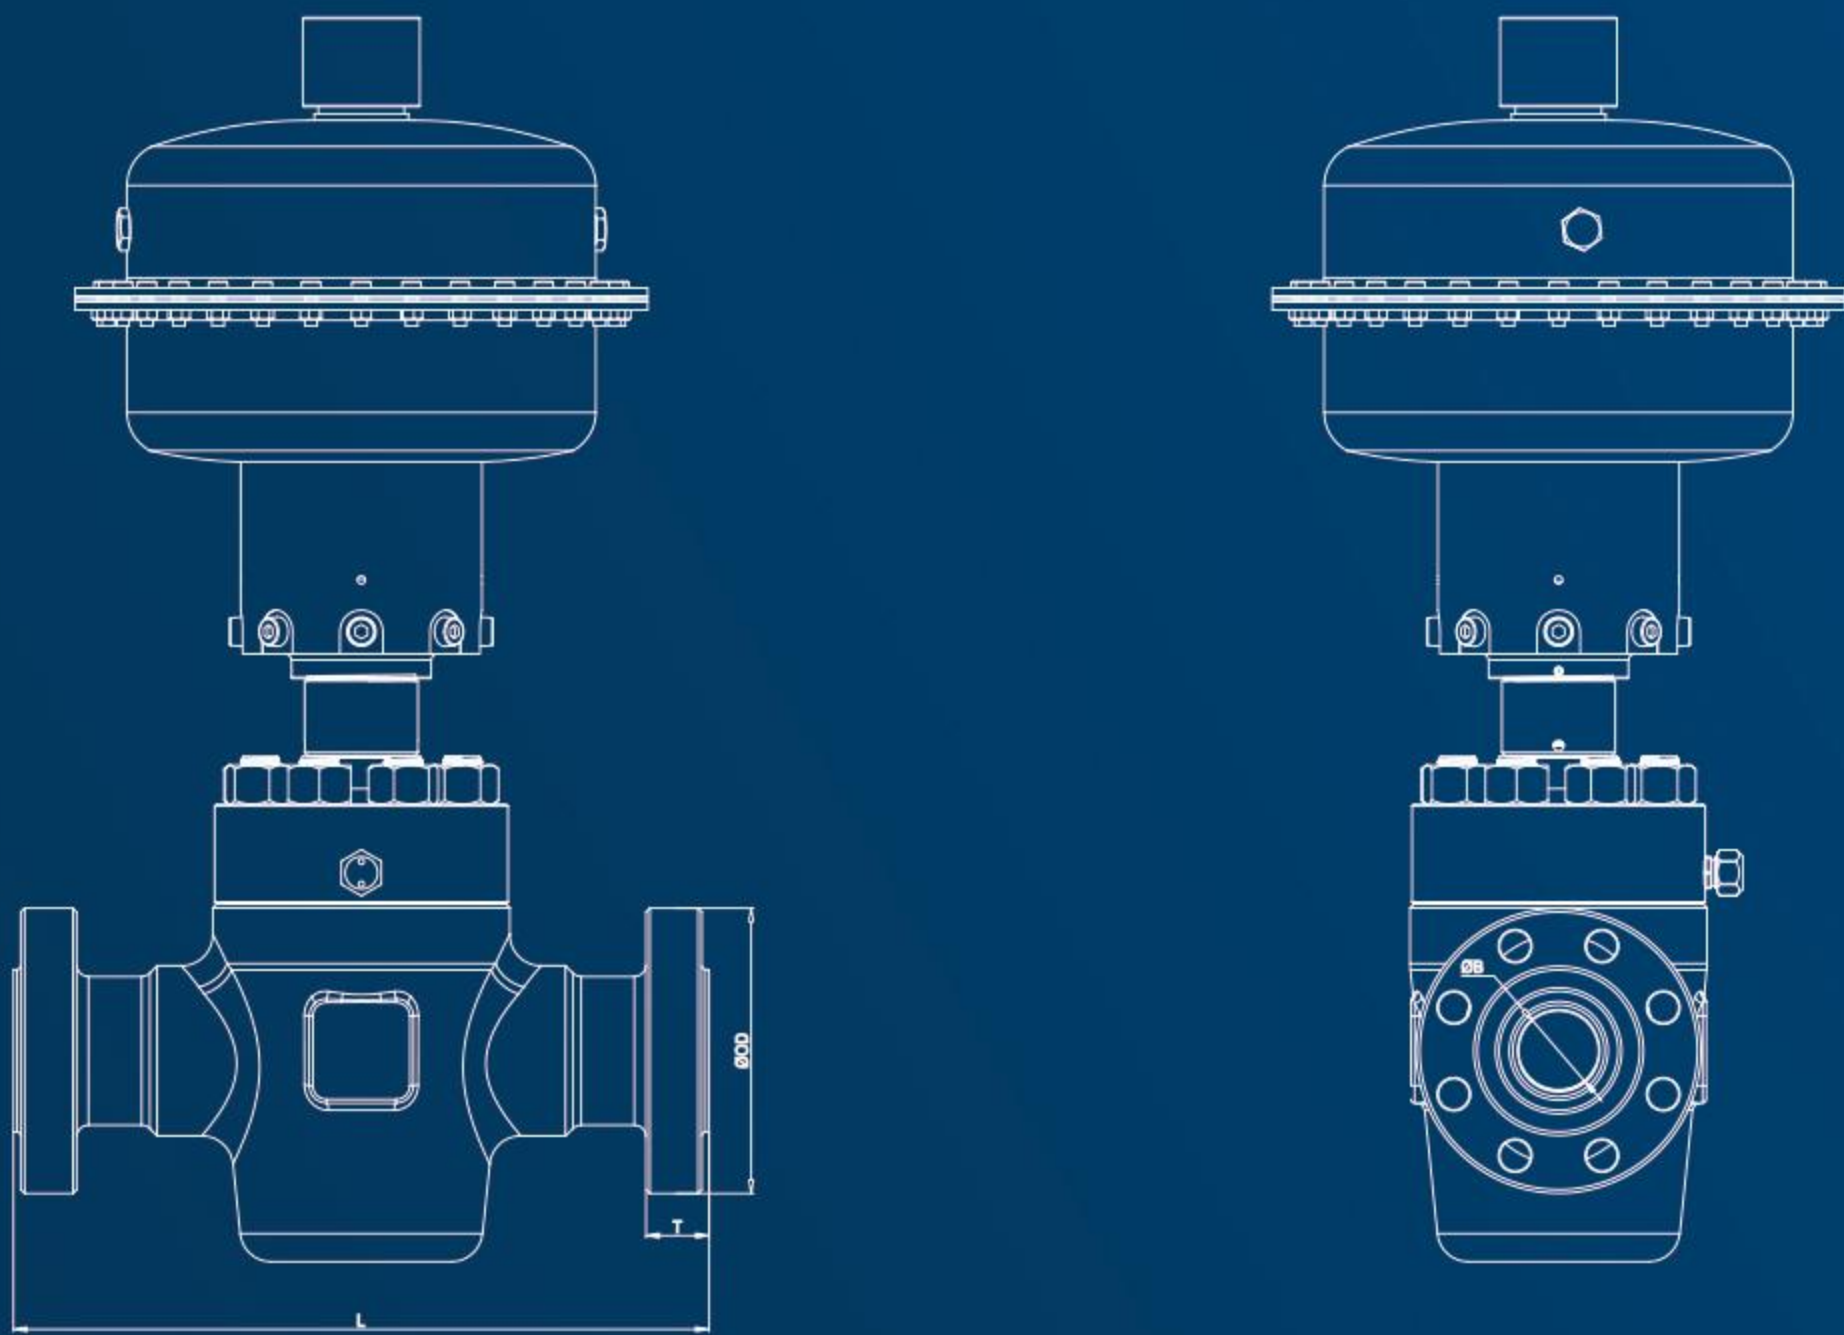

Work pressure 69.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	464	521	565	619	670	737	889
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	42.2	44.0	51.3	58.5	70.4	79.3	103.2
OD	187	200	232	270	316	357	480

Work pressure 103.5Mpa mm


Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	457	483	533	598	737	889	1041
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	45.3	50.8	57.2	64.3	78.5	98.6	119.1
OD	208	222	254	287	360	419	505

Work pressure 138.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	7-1/16
L	21.00	23.00	28.50	30.50	38.00	PMR
B	1.81	2.06	2.56	3.06	4.06	7.06
T	2.50	2.81	3.12	3.38	4.19	6.5
OD	10.12	11.31	12.81	14.06	17.56	25.81

Note: PMR: per manufacture's requirement 按制造商要求。

Parameter

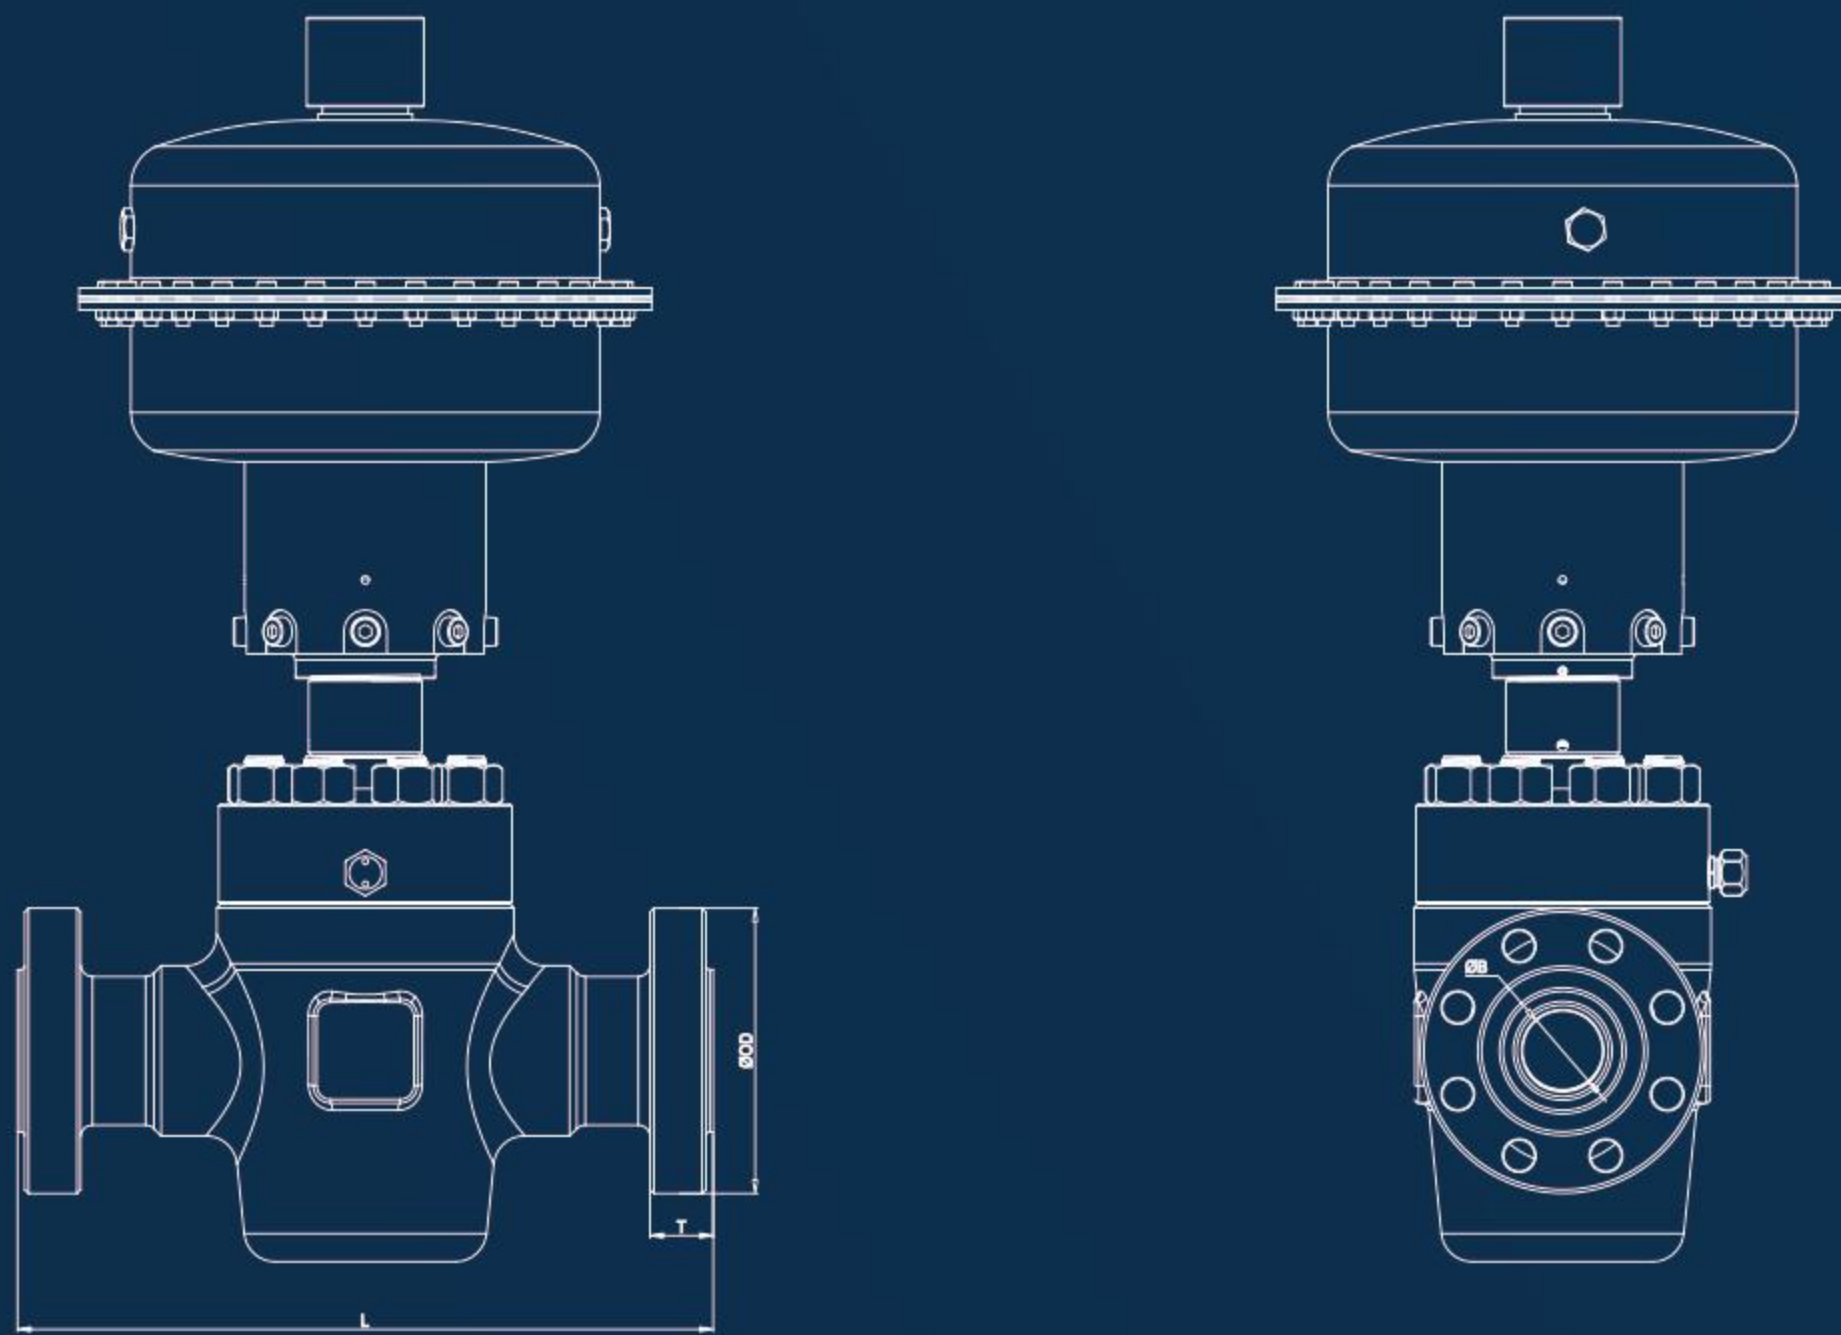

Work pressure 2000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	11.62	13.12	14.12	17.12	22.12	26.12
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.31	1.44	1.56	1.81	2.06	2.19
OD	6.50	7.50	8.25	10.75	13.00	14.00


Work pressure 3000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	14.62	16.62	17.12	20.12	24.12	28.12
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.81	1.94	1.81	2.06	2.31	2.5
OD	8.5	9.62	9.5	11.50	13.75	15.00

Work pressure 5000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	14.62	16.62	18.62	21.62	28.62	32.00
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.81	1.94	2.19	2.44	3.19	3.62
OD	8.50	9.62	10.50	12.25	14.75	15.5

Parameter

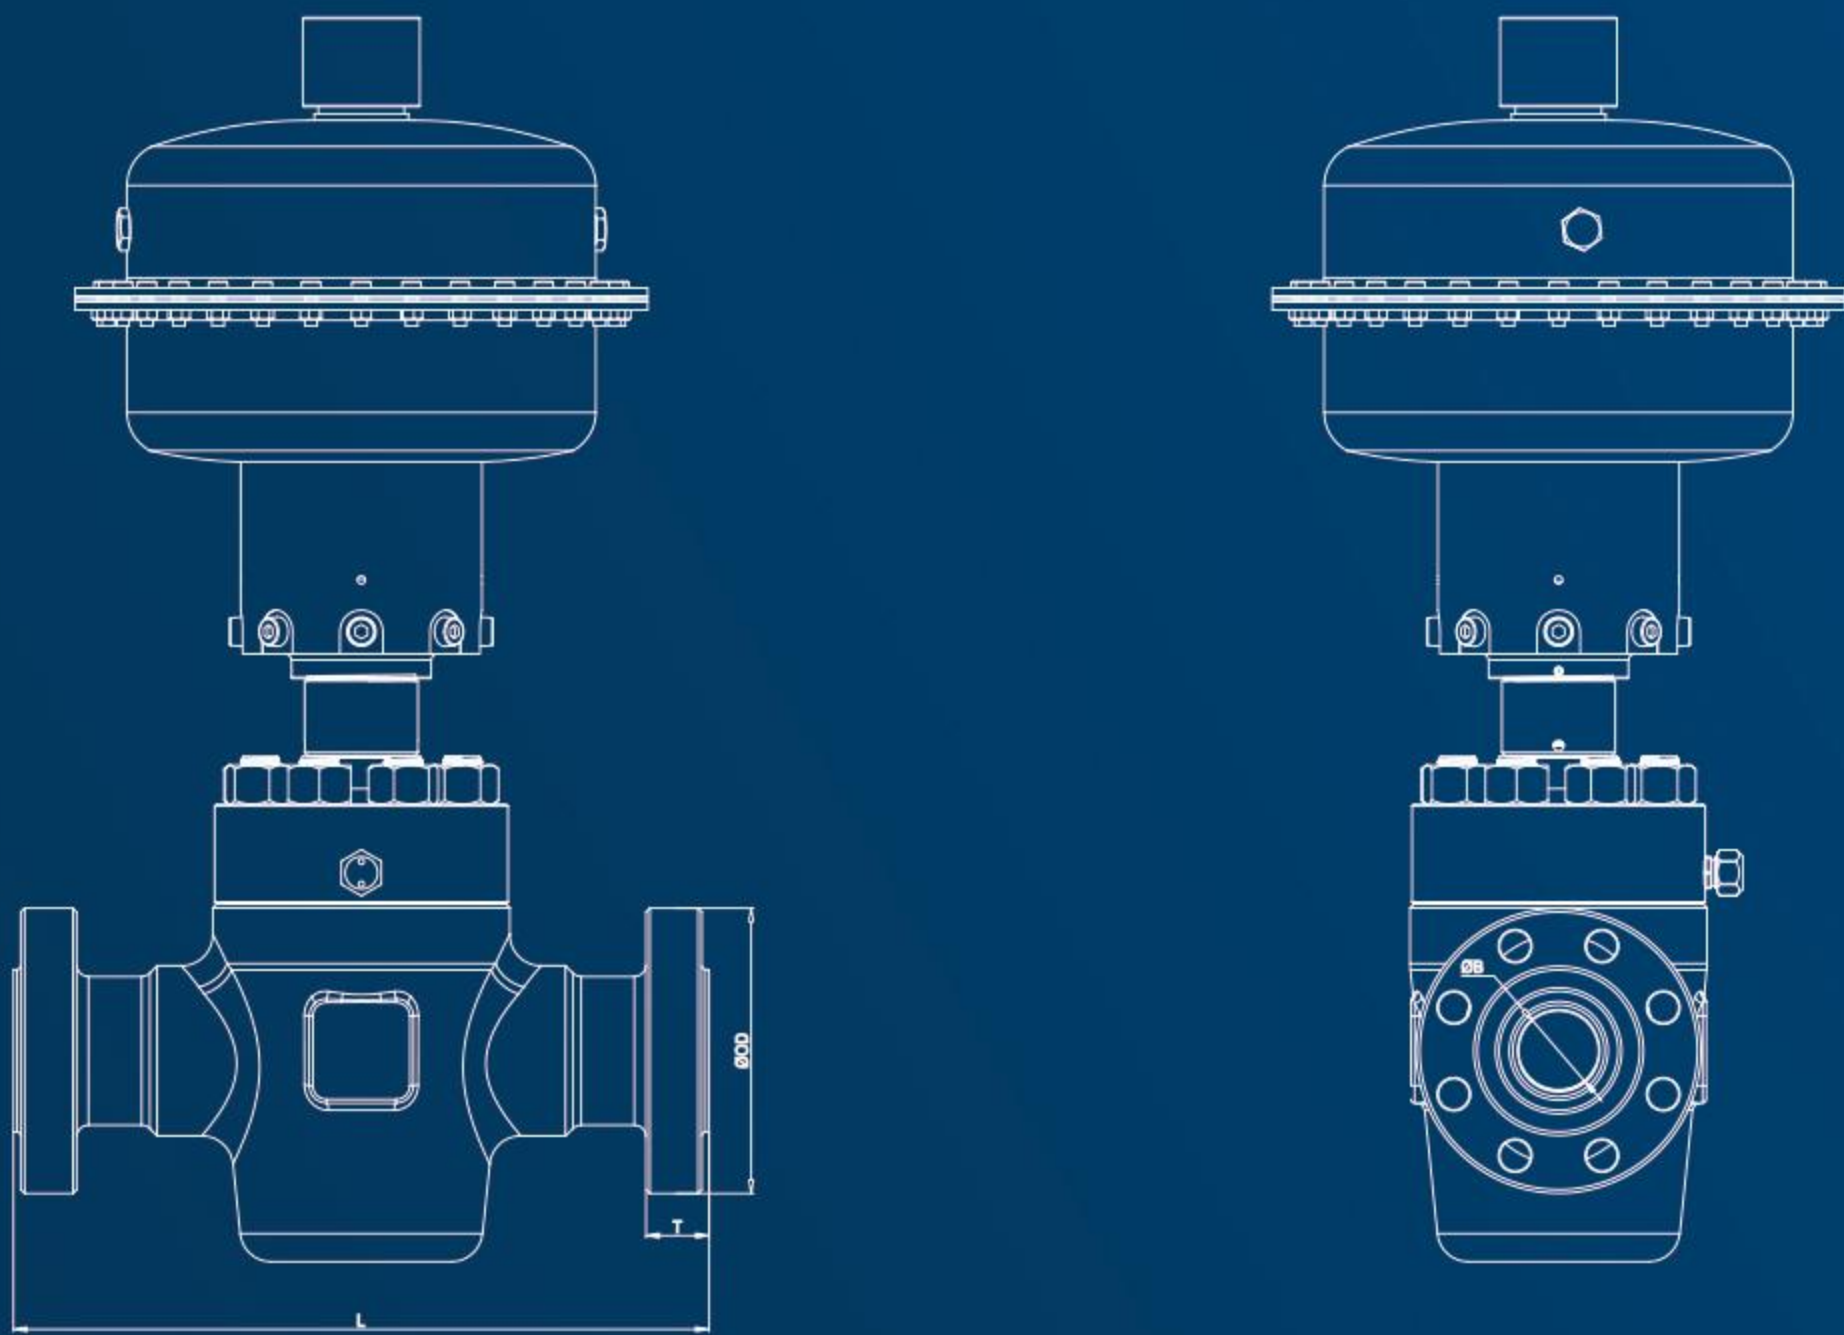

Work pressure 10000Psi in

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	18.25	20.50	22.25	24.38	26.38	29.00	35.00
B	1.81	2.06	2.56	3.06	4.06	5.12	7.06
T	1.66	1.73	2.02	2.30	2.77	3.12	4.06
OD	7.38	7.88	9.12	10.62	12.44	14.06	18.88

Work pressure 15000Psi in


Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	18.00	19.00	21.00	23.56	29.00	35.00	41.00
B	1.81	2.06	2.56	3.06	4.06	5.12	7.06
T	1.78	2.00	2.25	2.53	3.09	3.88	4.69
OD	8.19	8.75	10.00	11.31	14.19	16.5	19.88

Work pressure 20000Psi in

Flange size	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	533	584	673	775	965	PMR
B	46.7	53.1	65.8	78.5	103.9	180.1
T	63.5	71.4	79.3	85.9	106.5	165.1
OD	257	287	325	357	446	656

Note: PMR: per manufacture's requirement 按制造商要求。

GATE VALVE

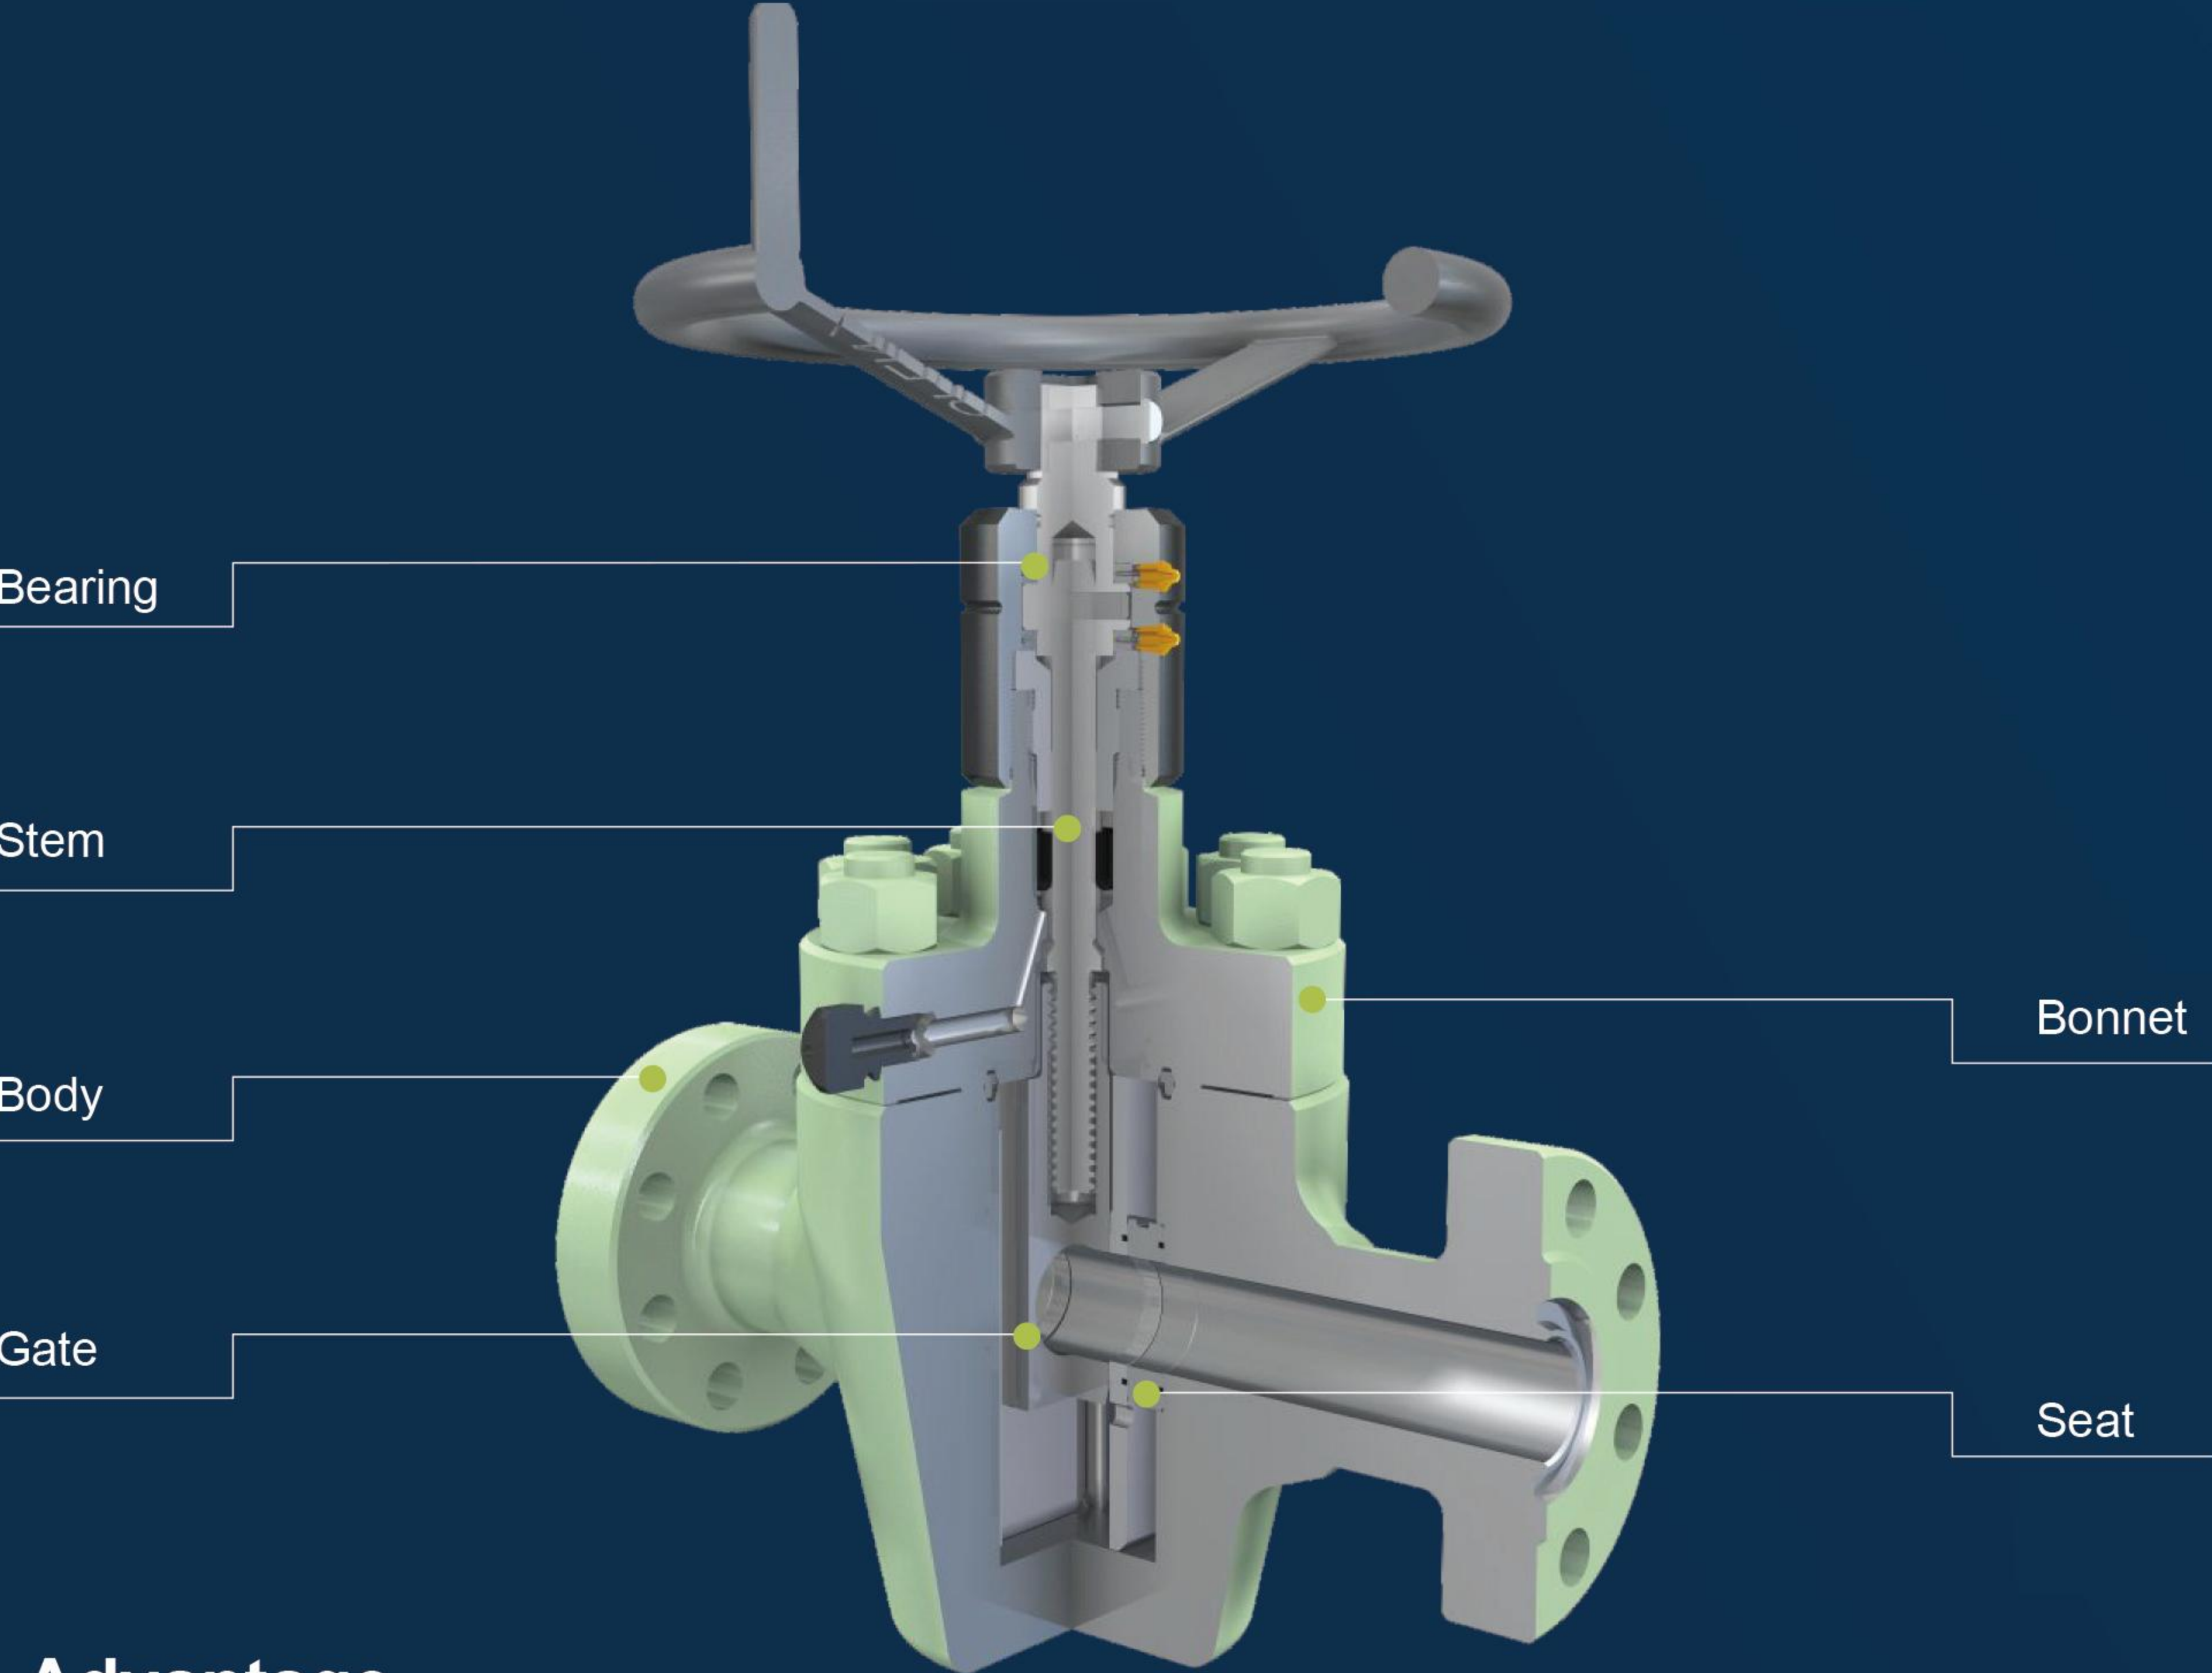


Advantage

- 1.Small fluid resistance
- 2.The torque is small, the operation torque is reduced, and the external force required for opening and closing is relatively small.
- 3.The flow of the medium is not limited.
- 4.When the valve is fully open, the sealing surface is difficult to flush and corrode, and the structural length is short.
- 5.The valve body is simple and suitable for mass production.

Standard	API Spec 6A, NACE MR0175
Work Pressure	2000PSI - 20000PSI
Nominal diameter	1-13/16", 2-1/16", 3-1/8", 3-1/16", 4-1/16", 5-1/8", 7-1/16"
Operation Method	Manual
Material Class	AA, BB, CC, DD, EE, FF, HH
Temperature Class	PU LU
Performance Class	PR1 - PR2
Specification Class	PSL1 - PSL3/PSL3G



Parameter

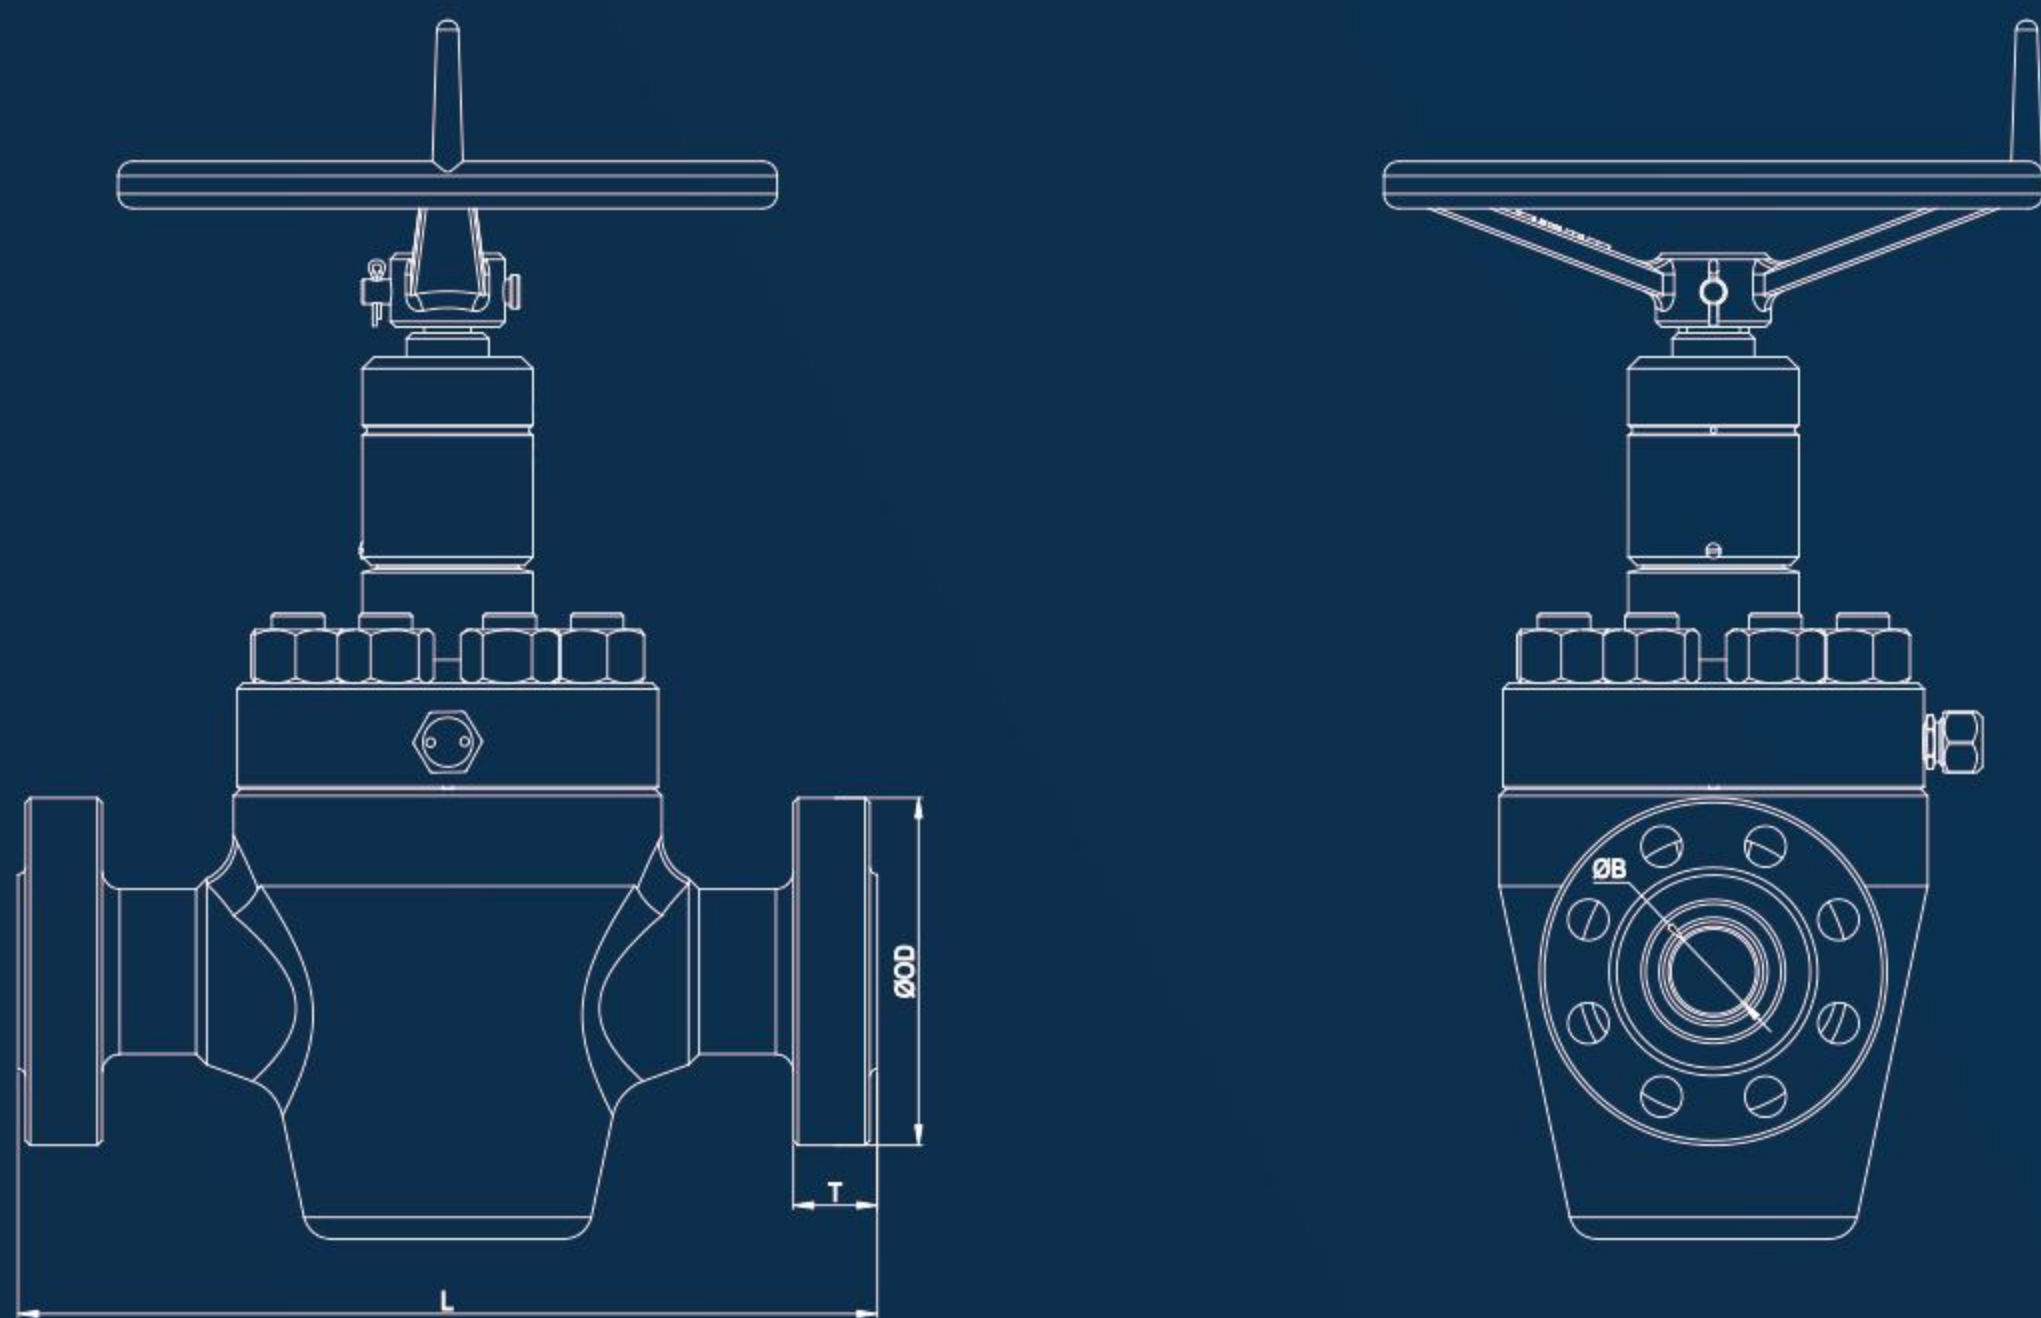

Work pressure 20.7Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	371.0	422.0	435.0	511.0	613.0	714.0
B	53.1	65.8	81.8	108.7	131.1	181.9
T	46	49.3	46.0	52.4	58.7	63.5
OD	216	244	241	292	349	381


Work pressure 34.5Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	371.0	422.0	473.0	549.0	727.0	813
B	53.1	65.8	81.8	108.7	131.1	181.9
T	46	49.3	55.7	62.0	81.0	92.0
OD	216	244	267	311	375	394

Work pressure 69.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	464	521	565	619	670	737	889
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	42.2	44.0	51.3	58.5	70.4	79.3	103.2
OD	187	200	232	270	316	357	480

Parameter

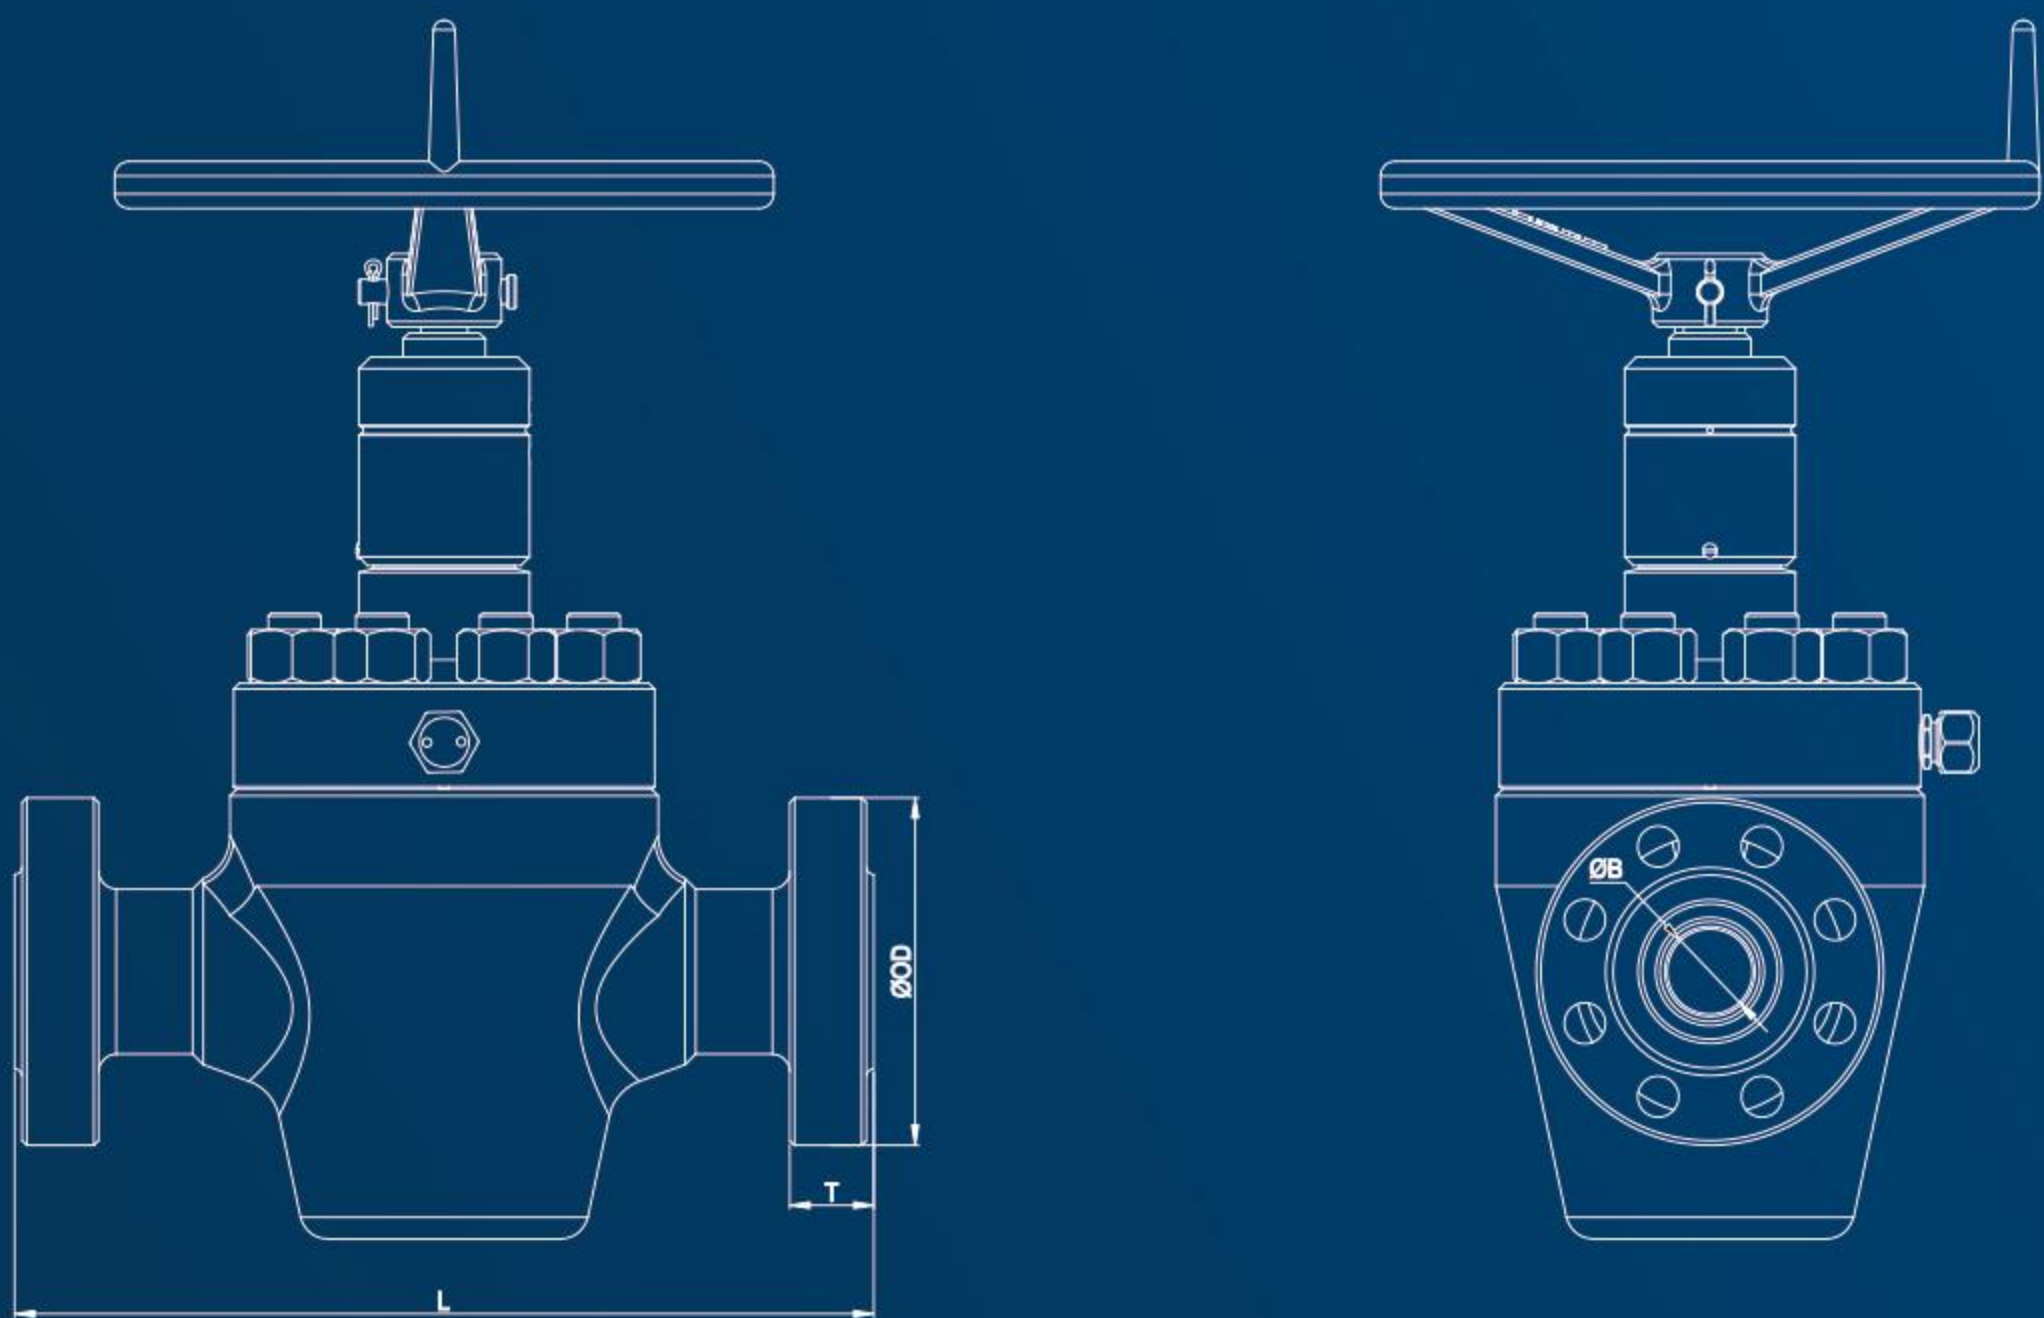

Work pressure 103.5Mpa mm


Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	457	483	533	598	737	889	1041
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	45.3	50.8	57.2	64.3	78.5	98.6	119.1
OD	208	222	254	287	360	419	505

Work pressure 138.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	7-1/16
L	533	584	673	775	965	PMR
B	46.7	53.1	65.8	78.5	103.9	180.1
T	63.5	71.4	79.3	85.9	106.5	165.1
OD	257	287	325	357	446	656

Note: PMR: per manufactyure's requirement 按制造商要求。

Parameter

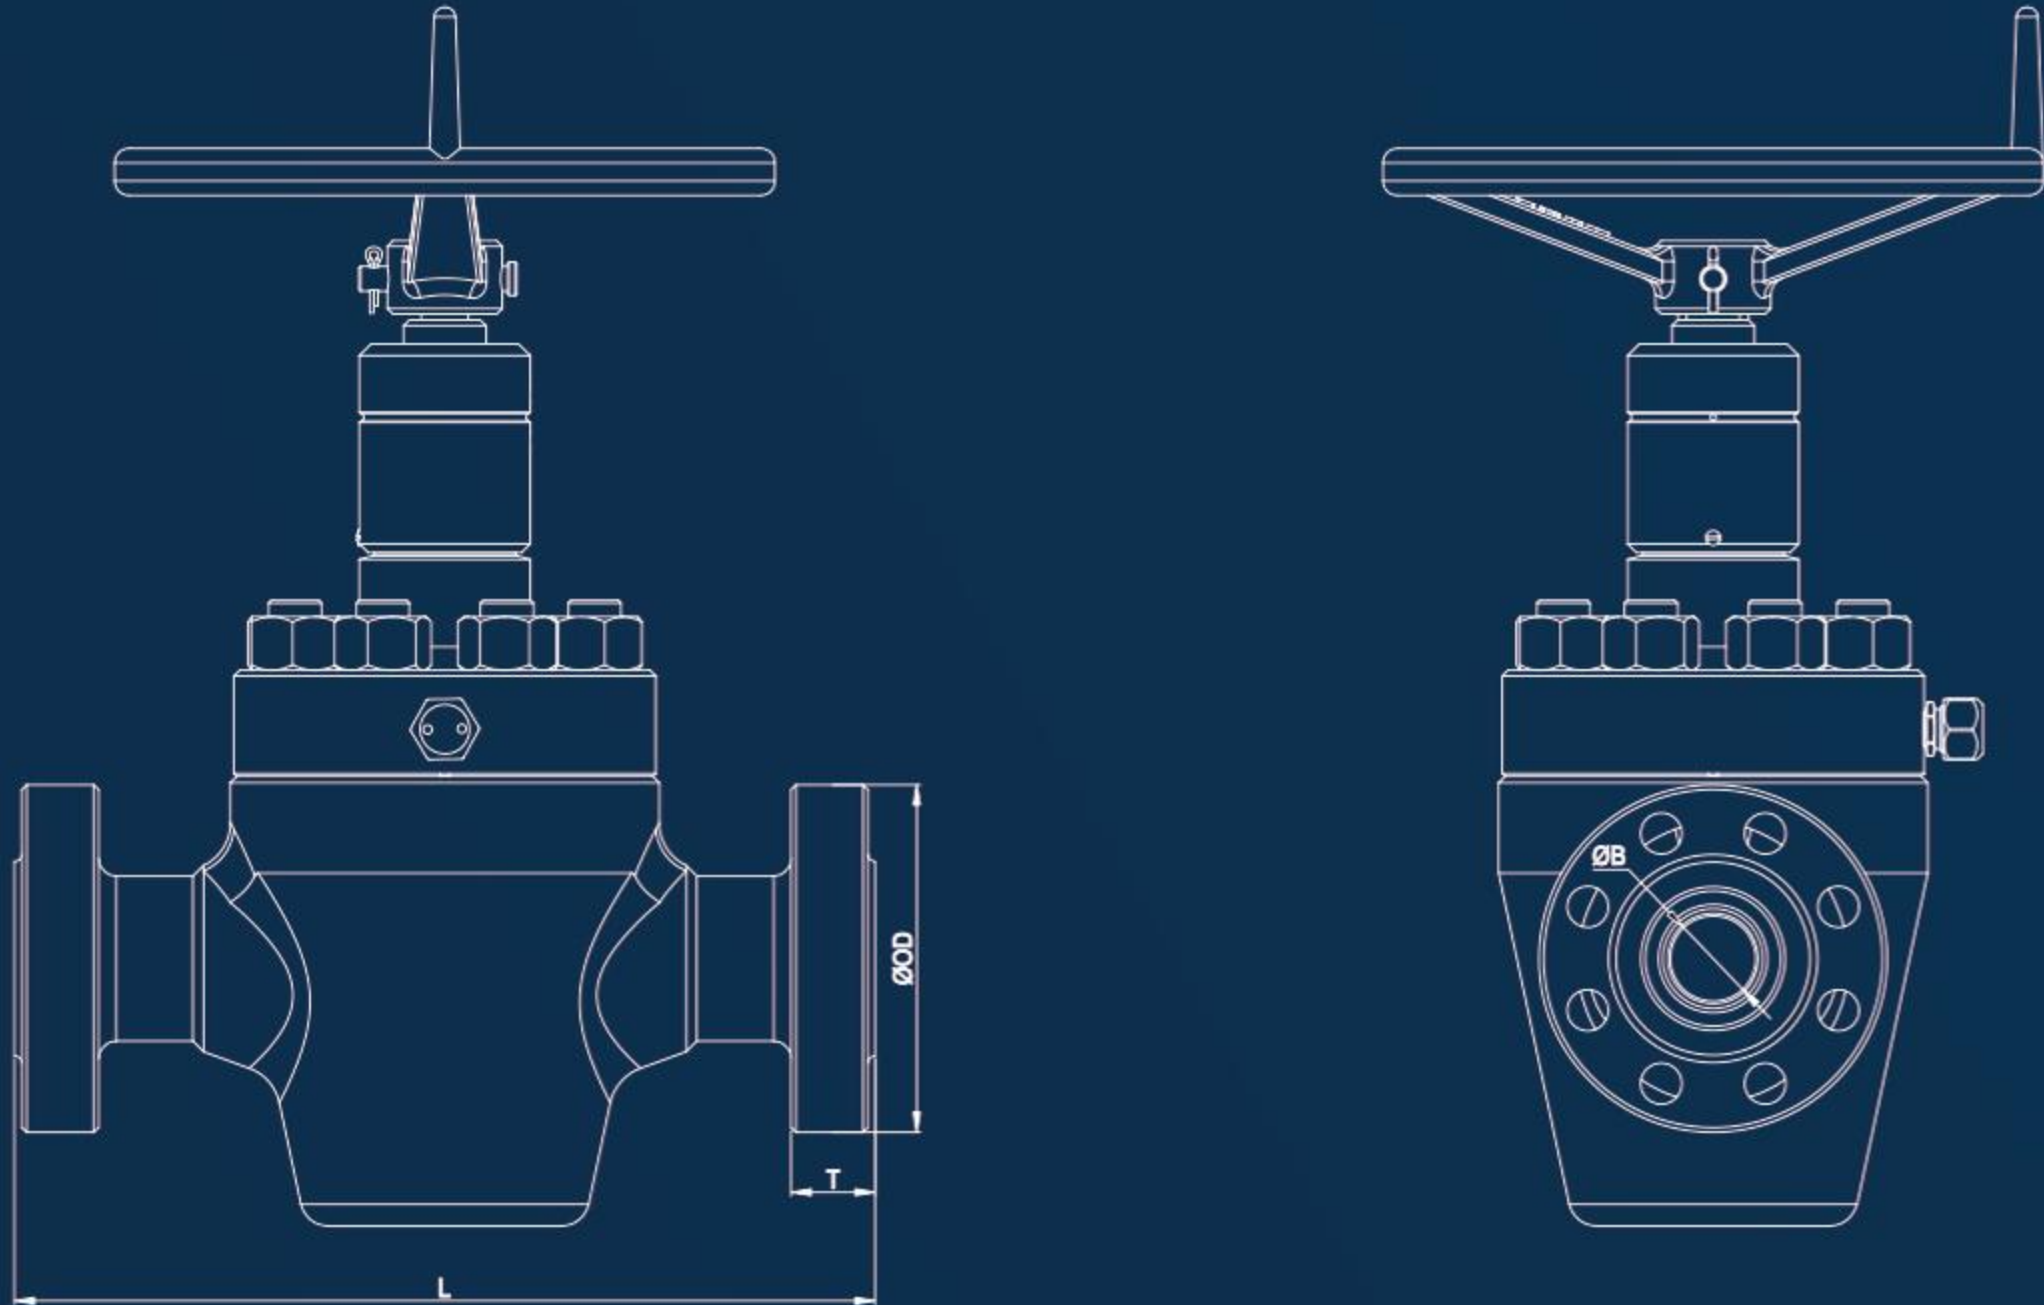

Work pressure 3000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	14.62	16.62	17.12	20.12	24.12	28.12
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.81	1.94	1.81	2.06	2.31	2.5
OD	8.5	9.62	9.5	11.50	13.75	15.00


Work pressure 5000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	14.62	16.62	18.62	21.62	28.62	32.00
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.81	1.94	2.19	2.44	3.19	3.62
OD	8.50	9.62	10.50	12.25	14.75	15.5

Work pressure 10000Psi in

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	464	521	565	619	670	737	889
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	42.2	44.0	51.3	58.5	70.4	79.3	103.2
OD	187	200	232	270	316	357	480

Parameter

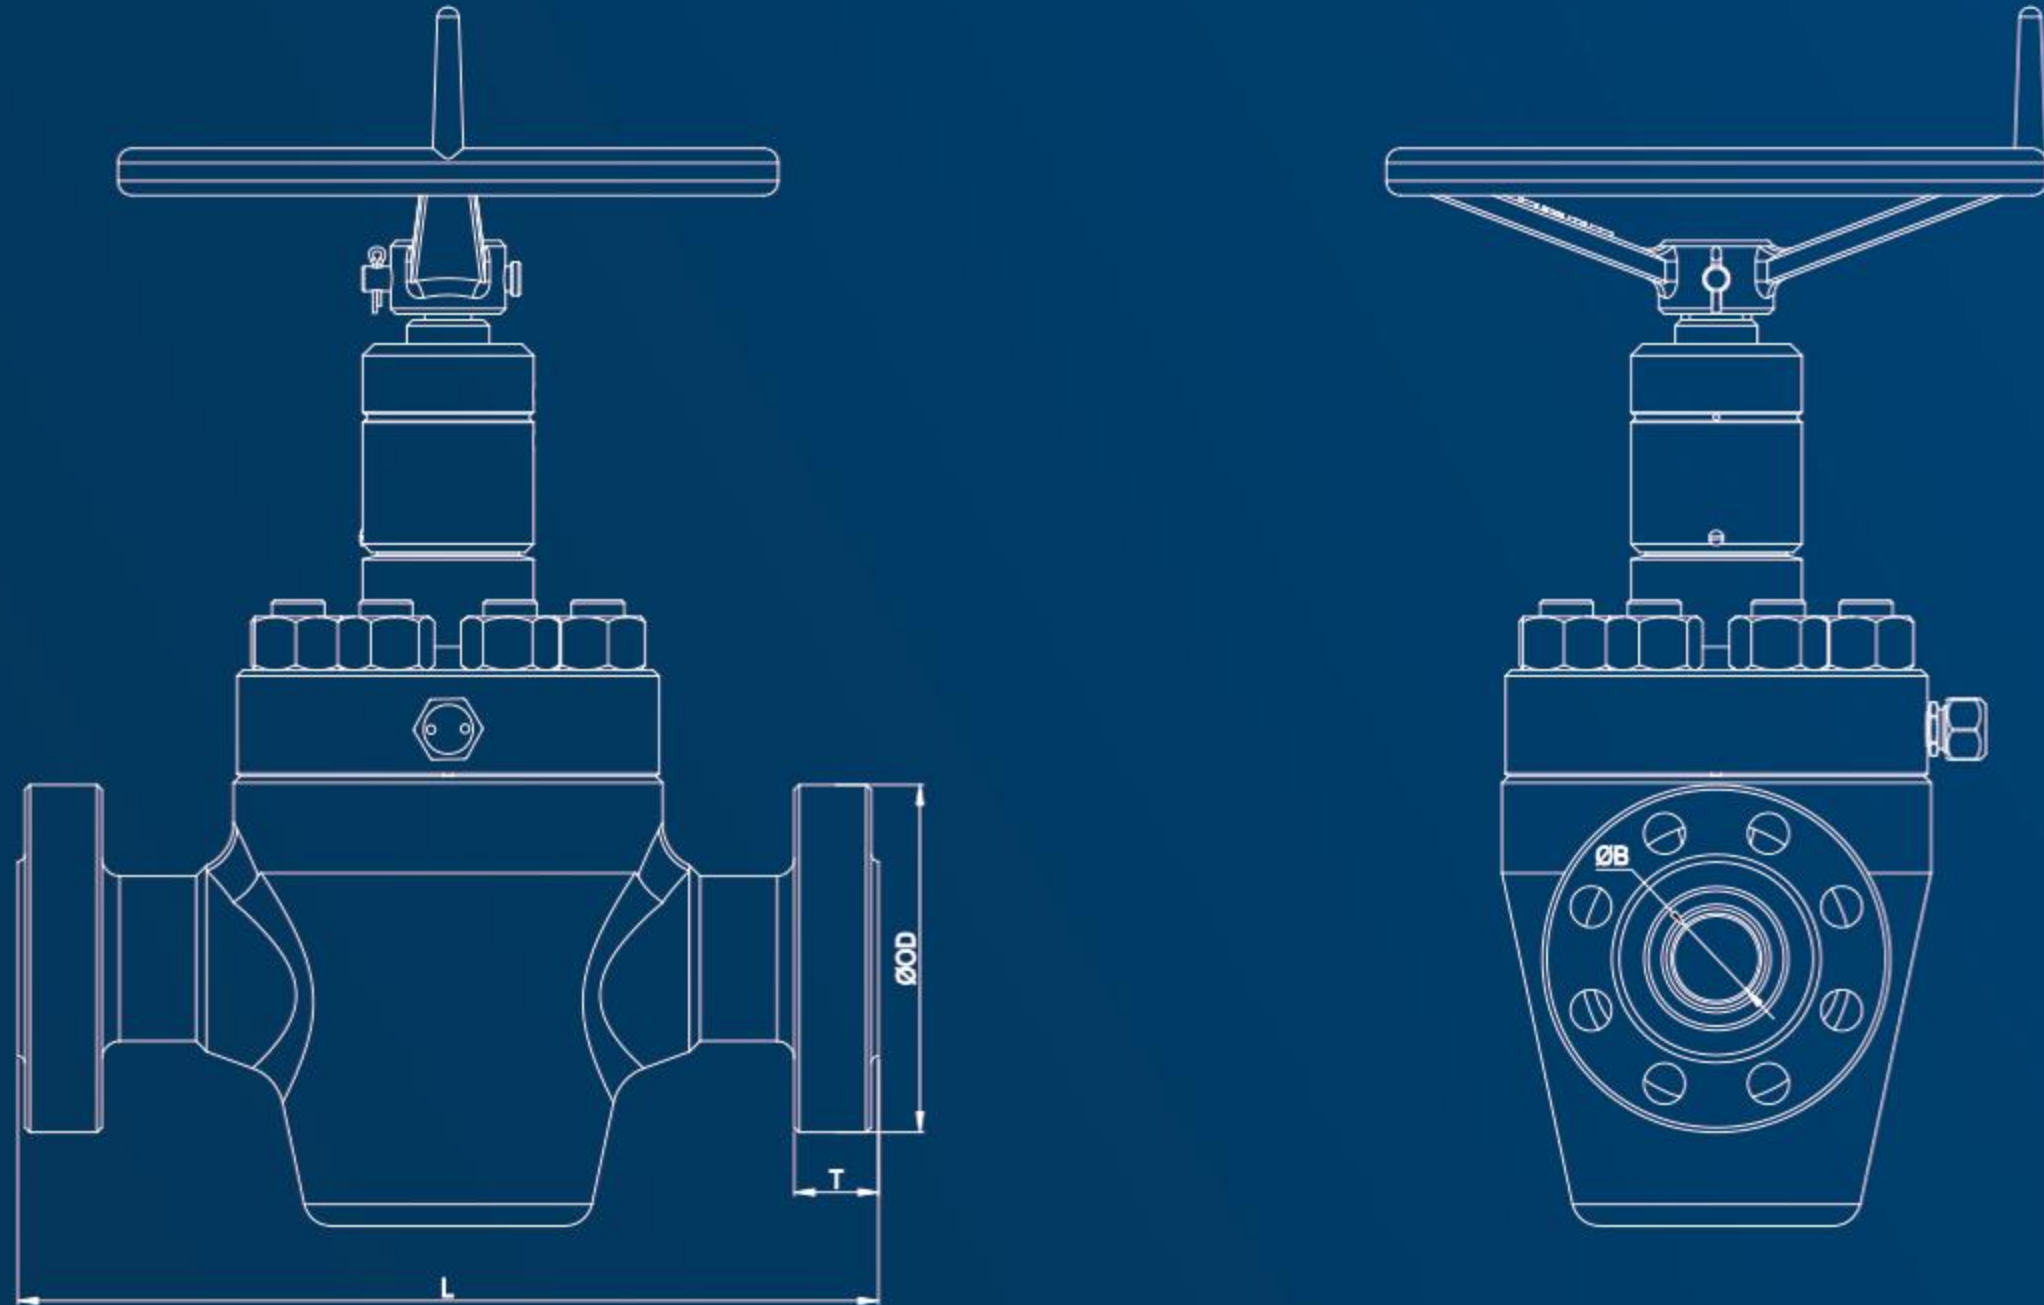

Work pressure 15000Psi in


Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	18.00	19.00	21.00	23.56	29.00	35.00	41.00
B	1.81	2.06	2.56	3.06	4.06	5.12	7.06
T	1.78	2.00	2.25	2.53	3.09	3.88	4.69
OD	8.19	8.75	10.00	11.31	14.19	16.5	19.88

Work pressure 20000Psi in

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	7-1/16
L	21.00	23.00	28.50	30.50	38.00	PMR
B	1.81	2.06	2.56	3.06	4.06	7.06
T	2.50	2.81	3.12	3.38	4.19	6.5
OD	10.12	11.31	12.81	14.06	17.56	25.81

Note: PMR: per manufacture's requirement 按制造商要求。

HYDRAULIC GATE VALVE

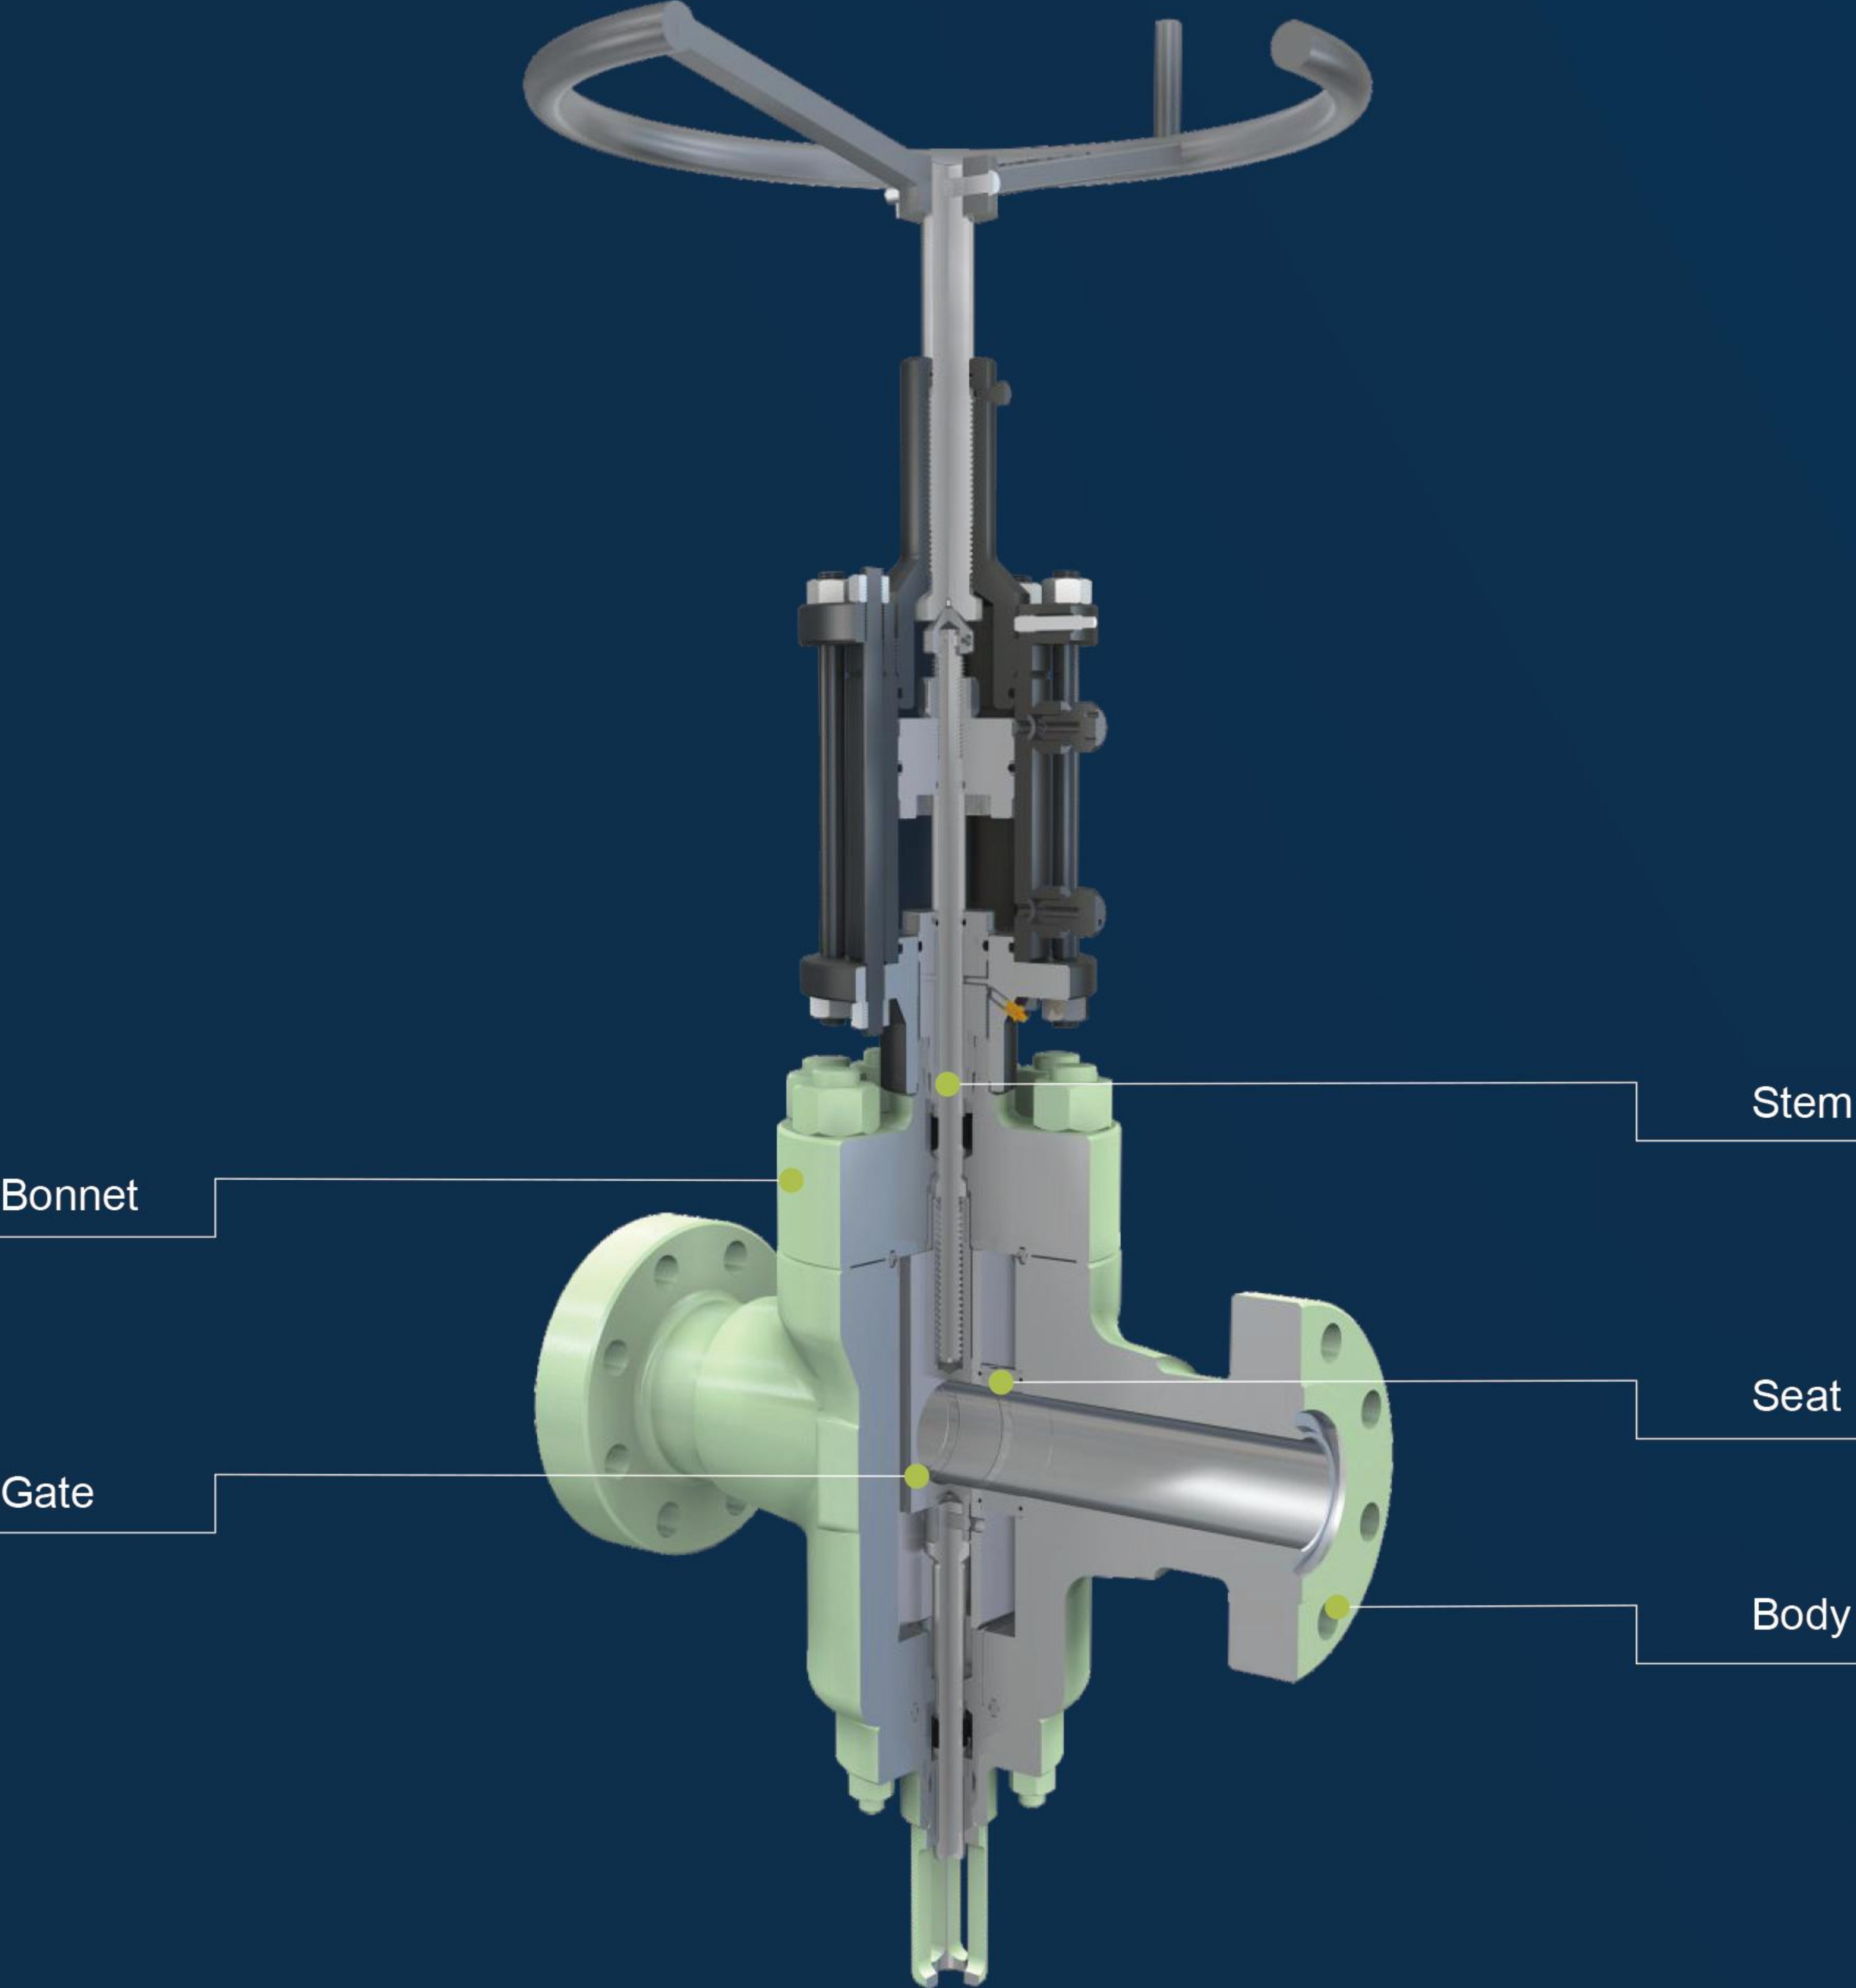


Advantage

- 1.Suitable for use in dangerous environments.
- 2.The switch indication is obvious.
- 3.The reliability of use has been significantly improved.
- 4.Inherit the advantages of flat gate valve.



Standard	API Spec 6A, NACE MR0175
Work Pressure	2000PSI - 20000PSI
Nominal diameter	1-13/16", 2-1/16", 3-1/8", 3-1/16", 4-1/16", 5-1/8", 7-1/16"
Operation Method	Manual,Hydraulic operated
Material Class	AA, BB, CC, DD, EE, FF, HH
Temperature Class	PU LU
Performance Class	Pr1 - PR2
Specification Class	PSL1 - PSL3/PSL3G

Parameter

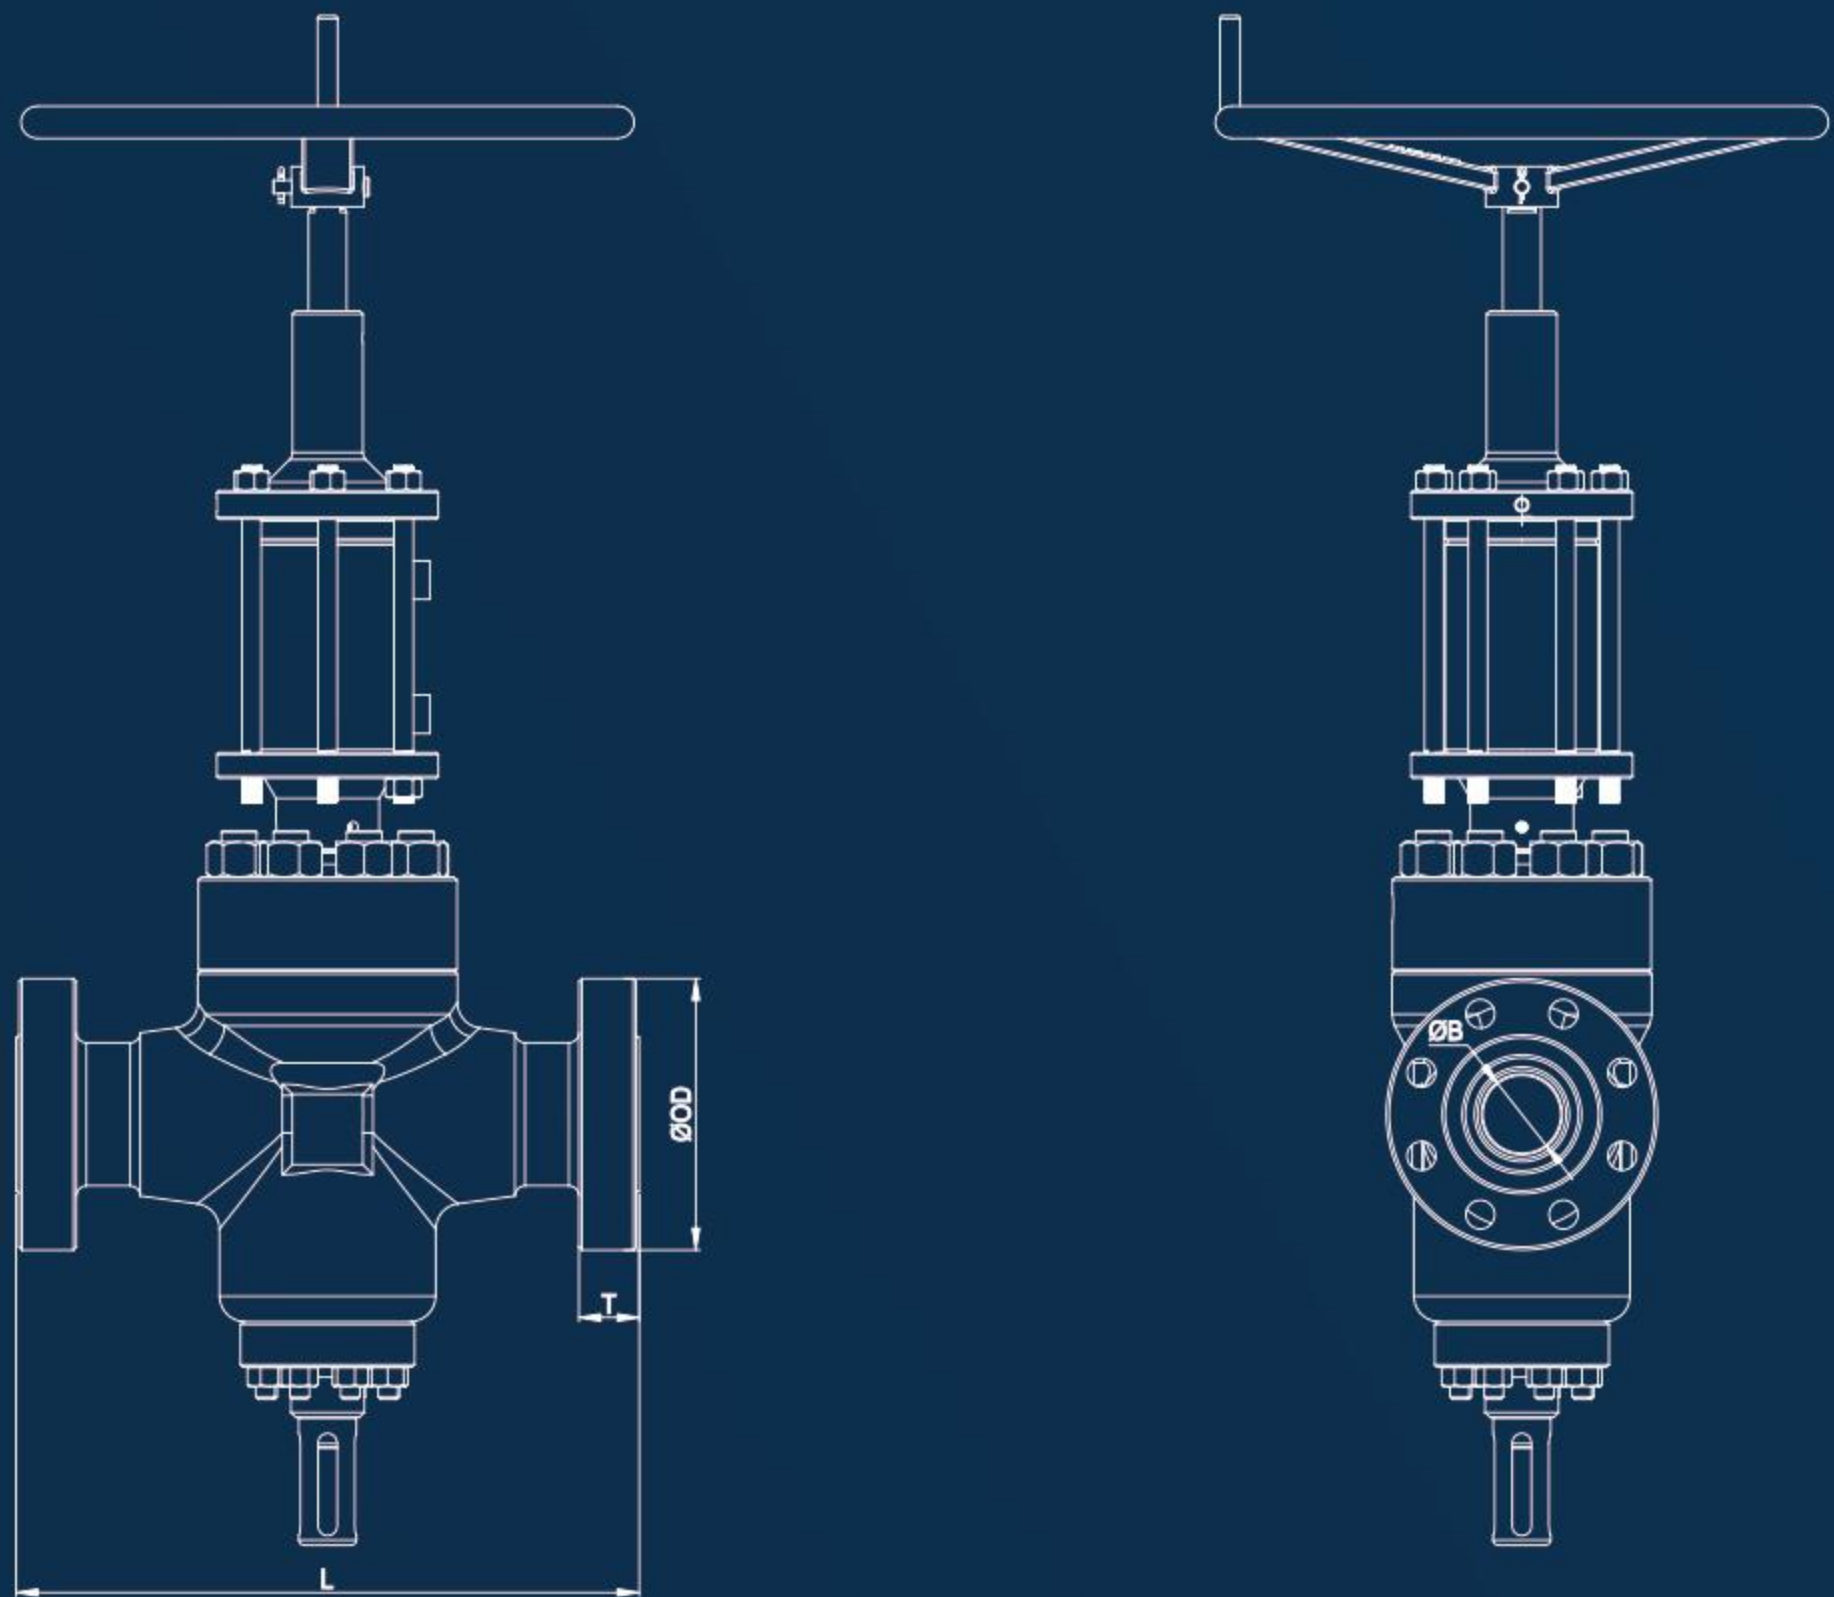

Work pressure 13.8Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	295.0	333.0	359.0	435.0	562.0	664.0
B	53.1	65.8	81.8	108.7	131.1	181.9
T	33.3	36.6	39.7	46.0	52.4	55.6
OD	165	191	210	273	330	356


Work pressure 20.7Mpa mm

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	371.0	422.0	435.0	511.0	613.0	714.0
B	53.1	65.8	81.8	108.7	131.1	181.9
T	46	49.3	46.0	52.4	58.7	63.5
OD	216	244	241	292	349	381

Work pressure 34.5Mpa mm

Flange size	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	371.0	422.0	473.0	549.0	727.0	813
B	53.1	65.8	81.8	108.7	131.1	181.9
T	46	49.3	55.7	62.0	81.0	92.0
OD	216	244	267	311	375	394

Parameter

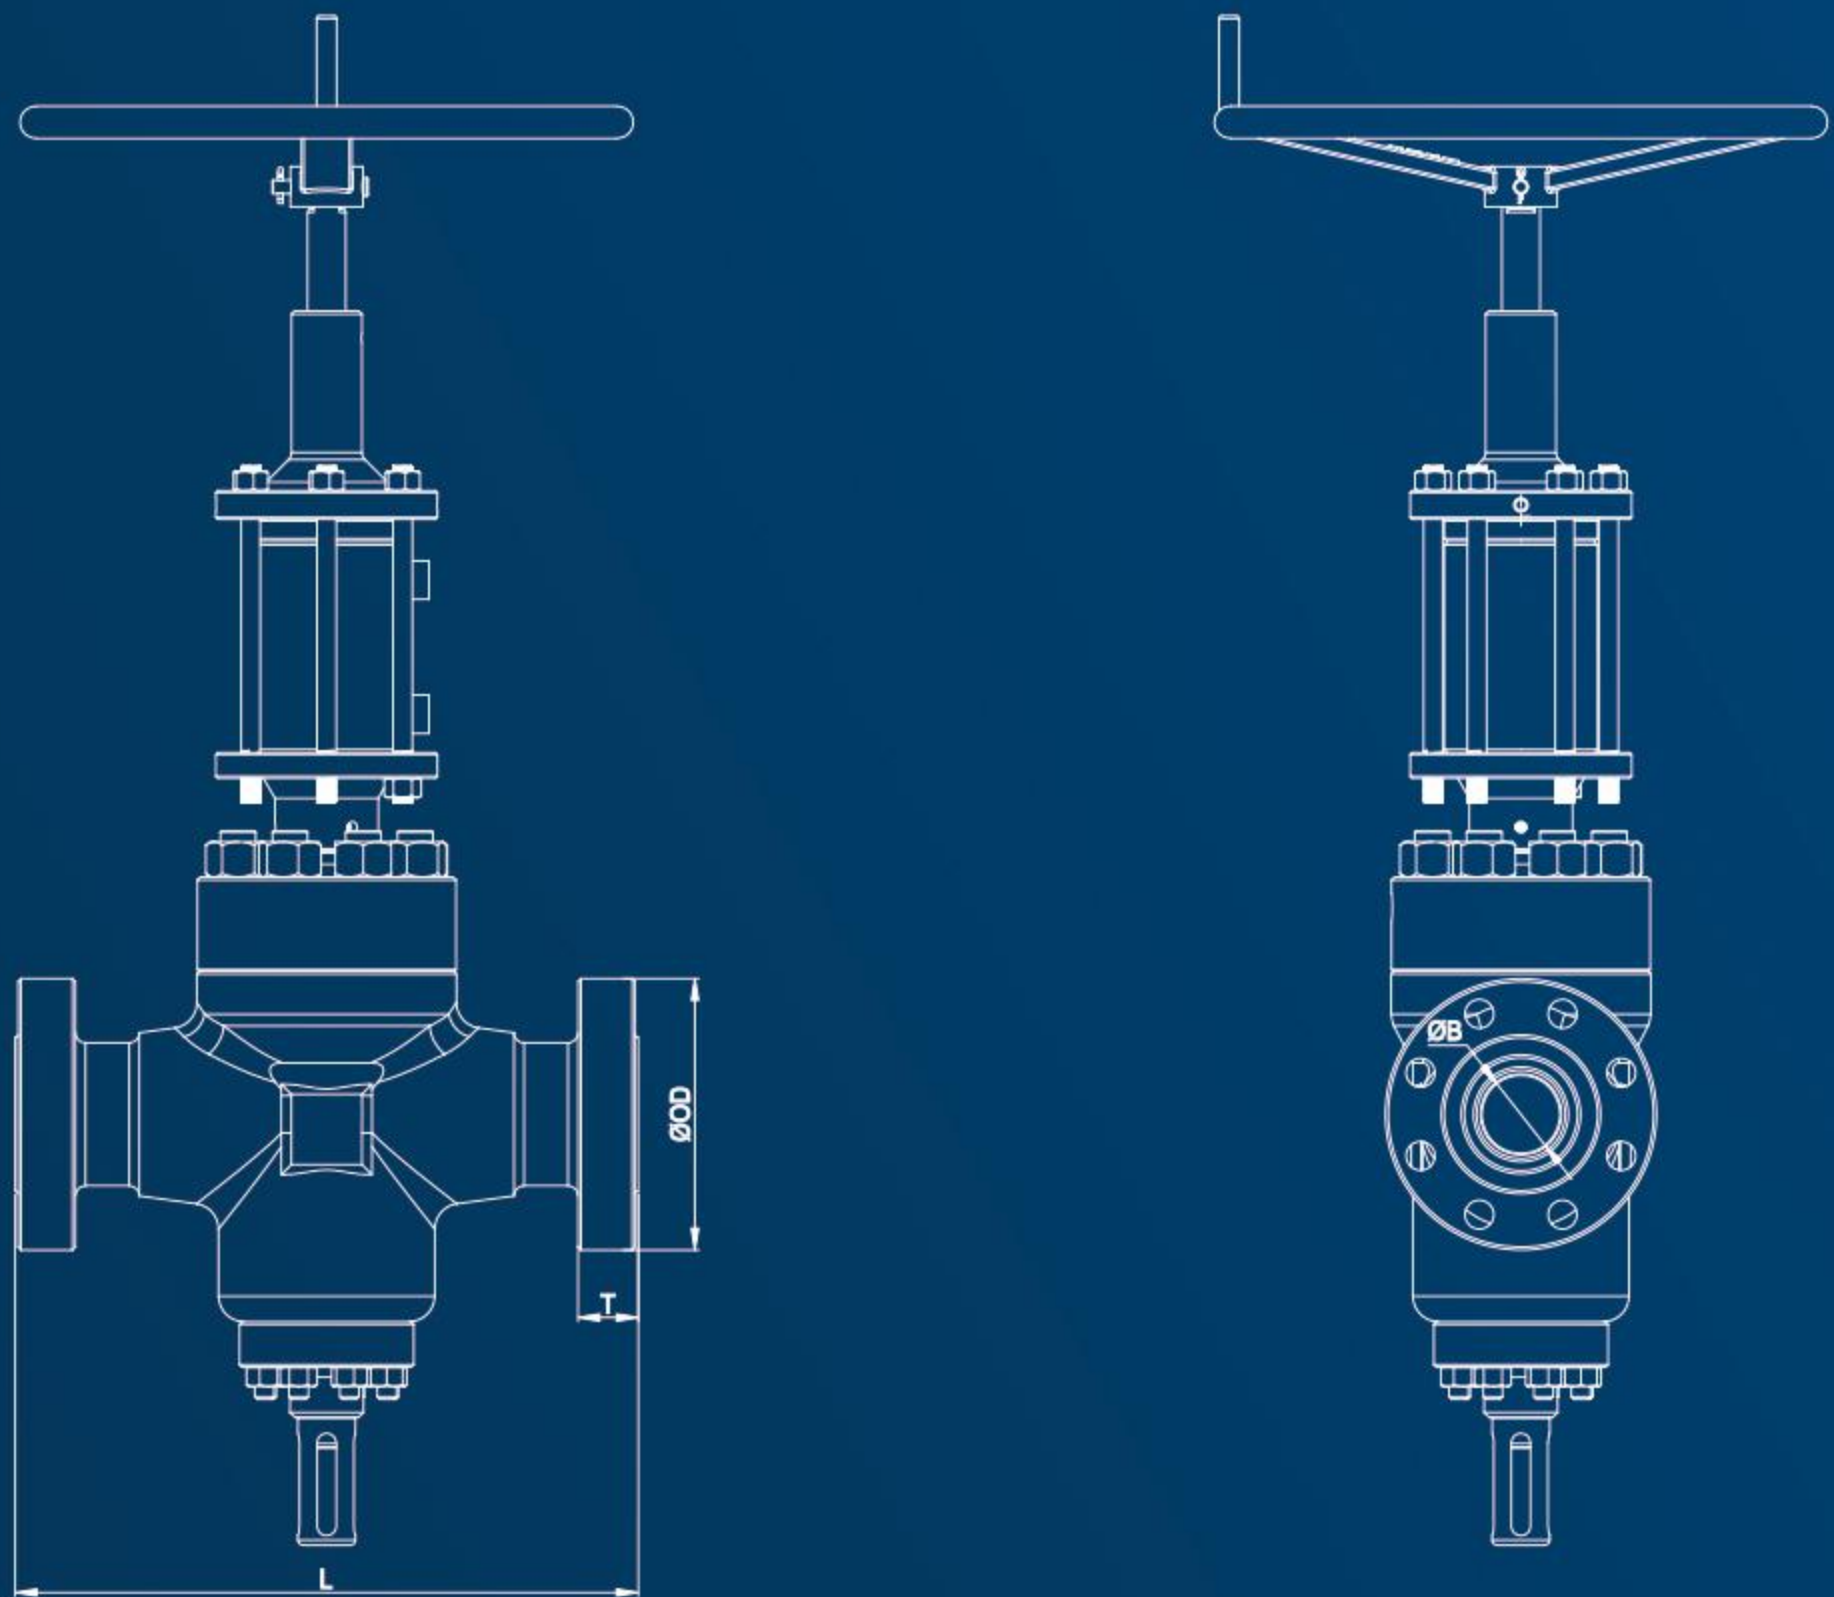

Work pressure 69.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	464	521	565	619	670	737	889
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	42.2	44.0	51.3	58.5	70.4	79.3	103.2
OD	187	200	232	270	316	357	480

Work pressure 103.5Mpa mm


Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	457	483	533	598	737	889	1041
B	46.7	53.1	65.8	78.5	103.9	131.1	180.1
T	45.3	50.8	57.2	64.3	78.5	98.6	119.1
OD	208	222	254	287	360	419	505

Work pressure 138.0Mpa mm

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	7-1/16
L	533	584	673	775	965	PMR
B	46.7	53.1	65.8	78.5	103.9	180.1
T	63.5	71.4	79.3	85.9	106.5	165.1
OD	257	287	325	357	446	656

Note: PMR: per manufacture's requirement 按制造商要求。

Parameter

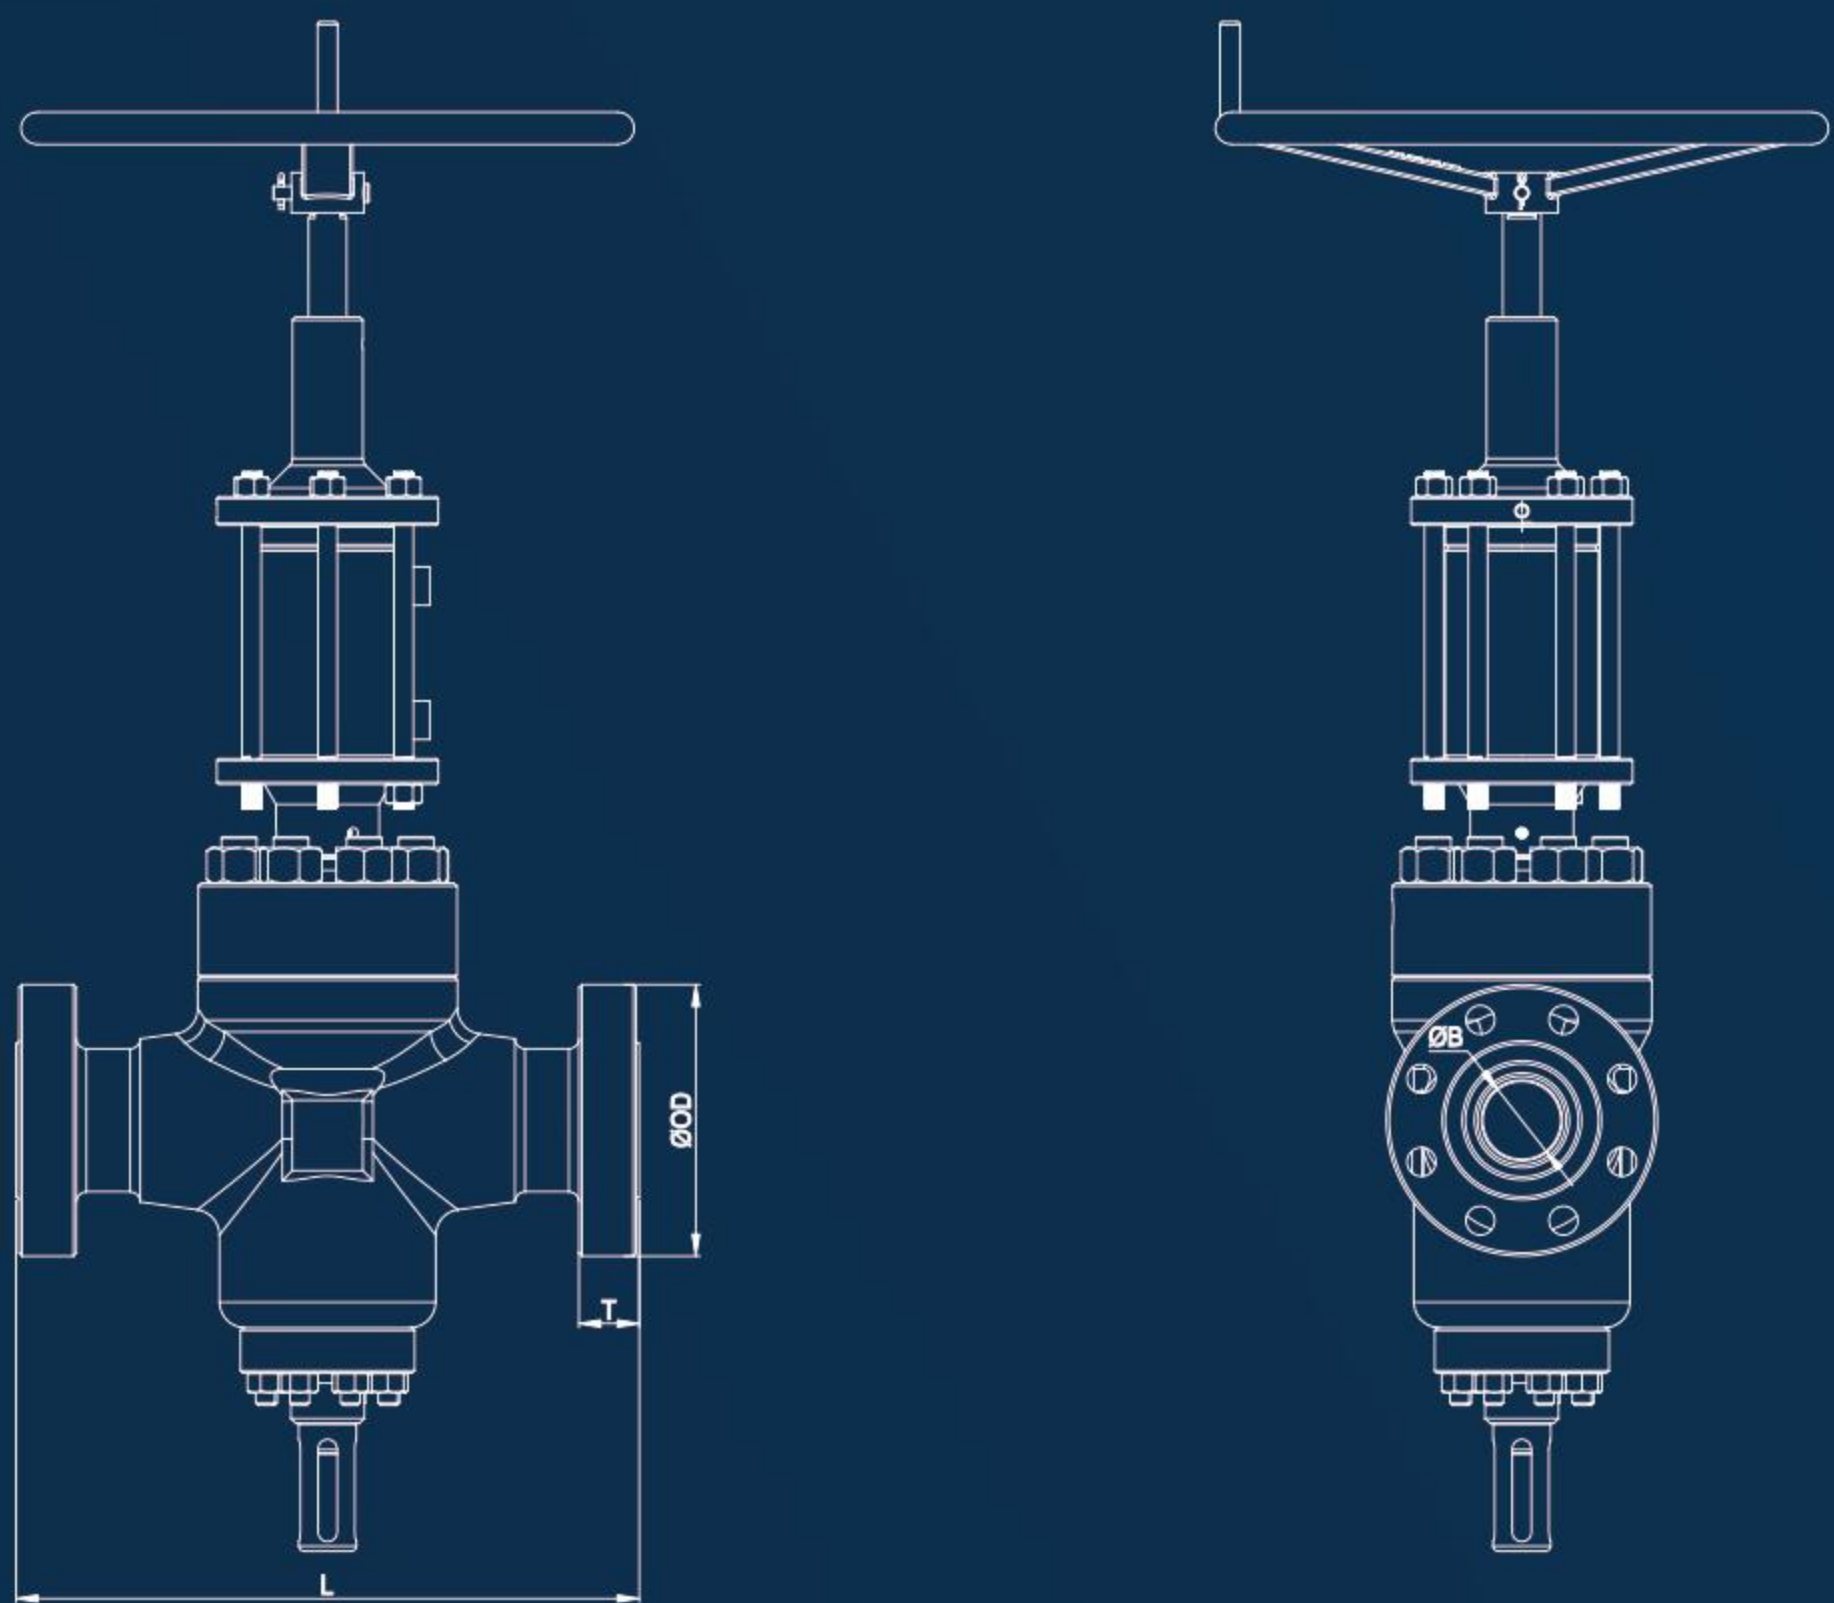

Work pressure 2000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	11.62	13.12	14.12	17.12	22.12	26.12
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.31	1.44	1.56	1.81	2.06	2.19
OD	6.50	7.50	8.25	10.75	13.00	14.00


Work pressure 3000Psi in

Flange size	2-1/16	2-9/16	3-1/8	4-1/16	5-1/8	7-1/16
L	14.62	16.62	17.12	20.12	24.12	28.12
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.81	1.94	1.81	2.06	2.31	2.5
OD	8.5	9.62	9.5	11.50	13.75	15.00

Work pressure 5000Psi in

Flange size	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	14.62	16.62	18.62	21.62	28.62	32.00
B	2.06	2.56	3.12	4.06	5.12	7.06
T	1.81	1.94	2.19	2.44	3.19	3.62
OD	8.50	9.62	10.50	12.25	14.75	15.5

Parameter

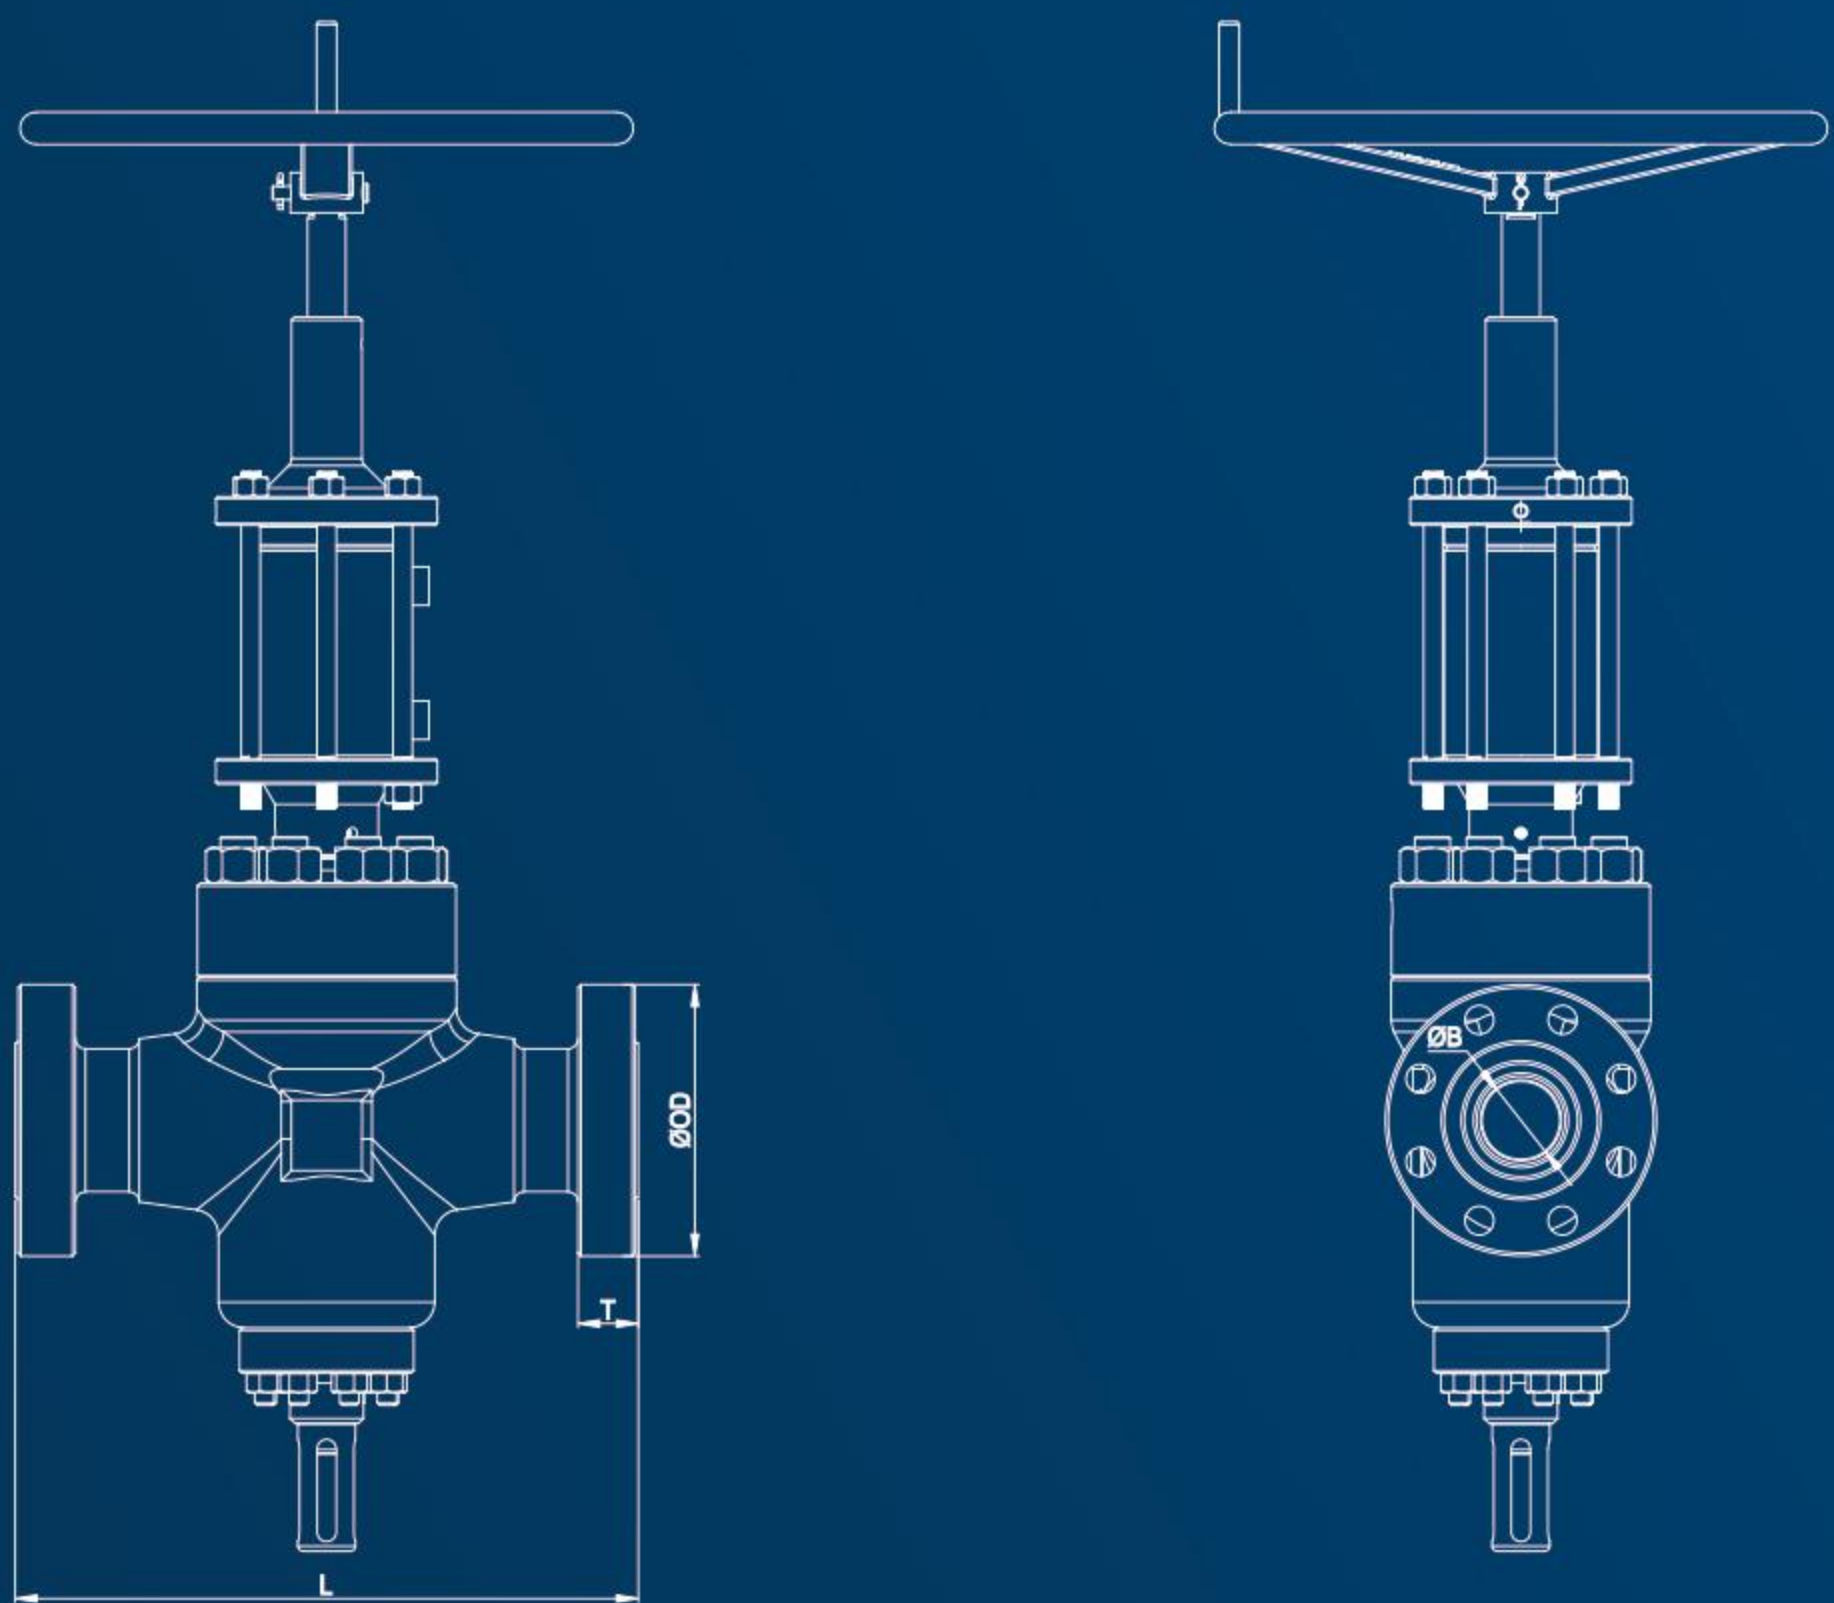

Work pressure 10000Psi in

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	18.25	20.50	22.25	24.38	26.38	29.00	35.00
B	1.81	2.06	2.56	3.06	4.06	5.12	7.06
T	1.66	1.73	2.02	2.30	2.77	3.12	4.06
OD	7.38	7.88	9.12	10.62	12.44	14.06	18.88

Work pressure 15000Psi in


Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	5-1/8	7-1/16
L	18.00	19.00	21.00	23.56	29.00	35.00	41.00
B	1.81	2.06	2.56	3.06	4.06	5.12	7.06
T	1.78	2.00	2.25	2.53	3.09	3.88	4.69
OD	8.19	8.75	10.00	11.31	14.19	16.5	19.88

Work pressure 20000Psi in

Flange size	1-13/16	2-1/16	2-9/16	3-1/16	4-1/16	7-1/16
L	21.00	23.00	28.50	30.50	38.00	PMR
B	1.81	2.06	2.56	3.06	4.06	7.06
T	2.50	2.81	3.12	3.38	4.19	6.5
OD	10.12	11.31	12.81	14.06	17.56	25.81

Note: PMR: per manufacture's requirement 按制造商要求。

CHOKER VALVE

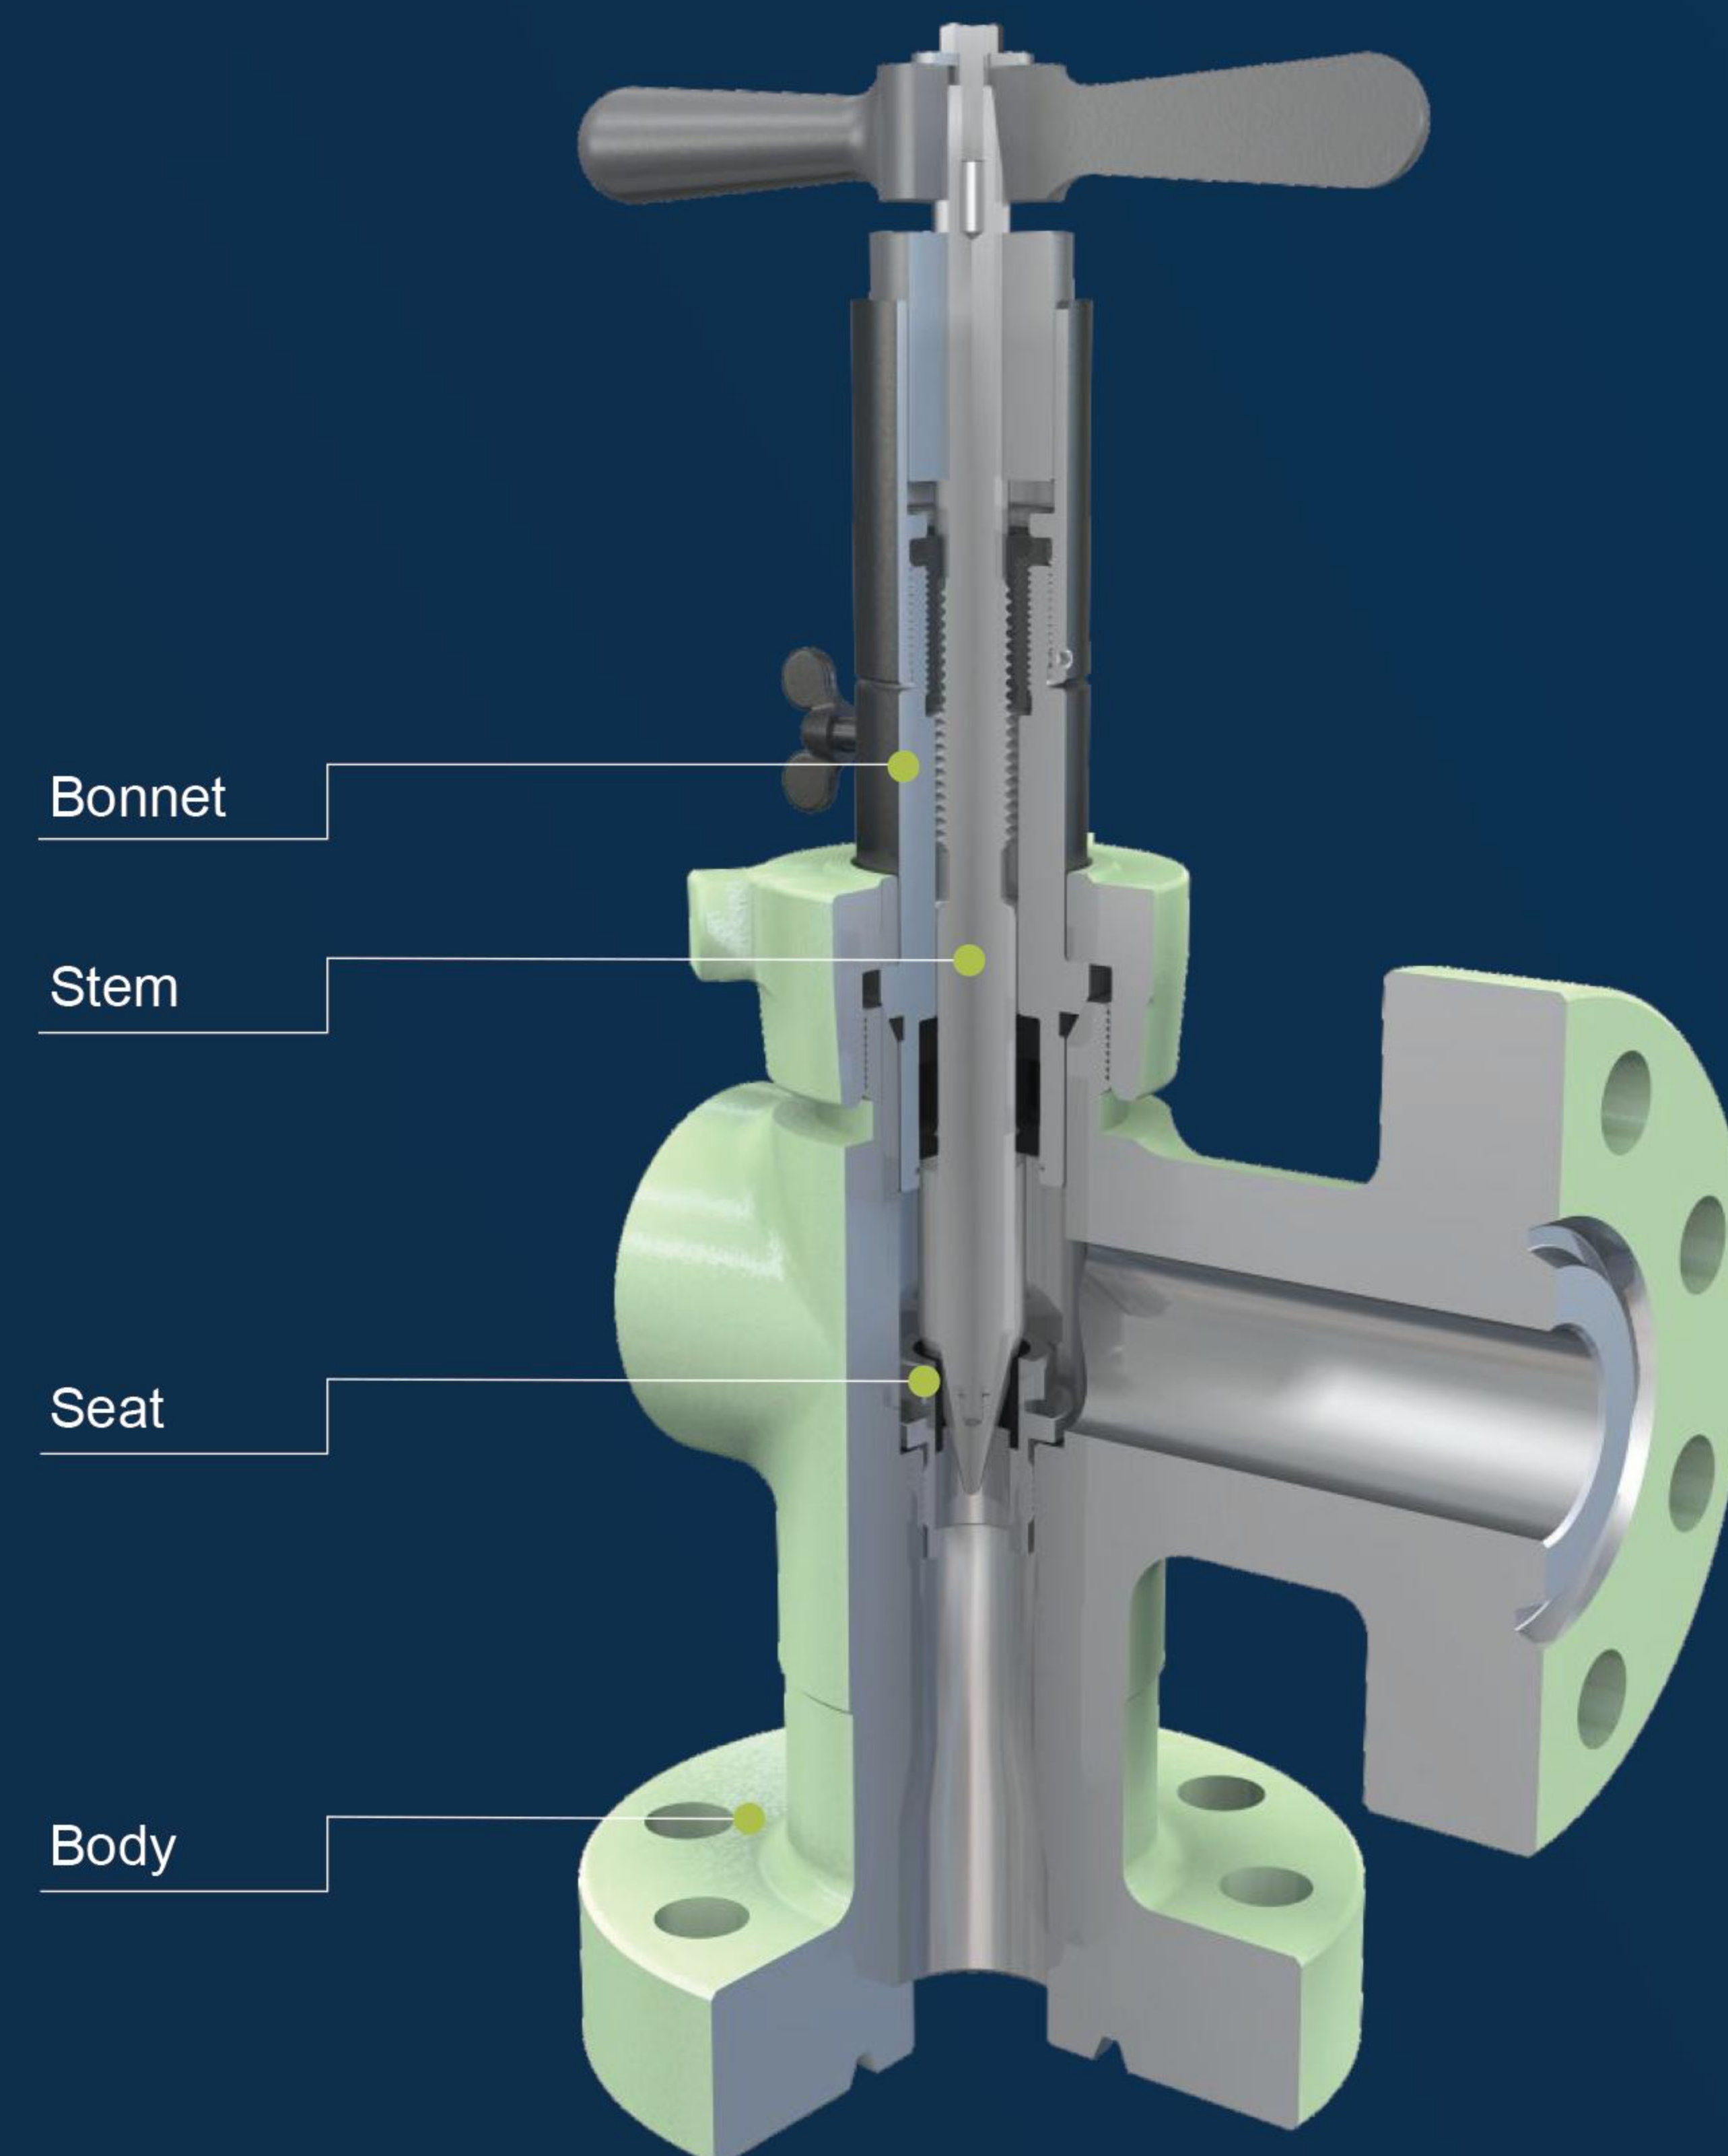


Advantage

- The flange connection port can be adapted to various flange accessories.
- The valve stem and valve seat have special treatment where the medium passes, which is corrosion-resistant and flush-resistant.




Standard	API Spec 6A, NACE MR0175
Work Pressure	2000PSI - 15000PSI
Nominal diameter	1-13/16", 2-1/16", 3-1/8", 3-1/16", 4-1/16"
Operation Method	Manual,Hydraulic operated
Material Class	AA, BB, CC, DD, EE, FF, HH
Temperature Class	PU LU
Performance Class	PR1 - PR2
Specification Class	PSL1 - PSL3/PSL3G

■ Parameter

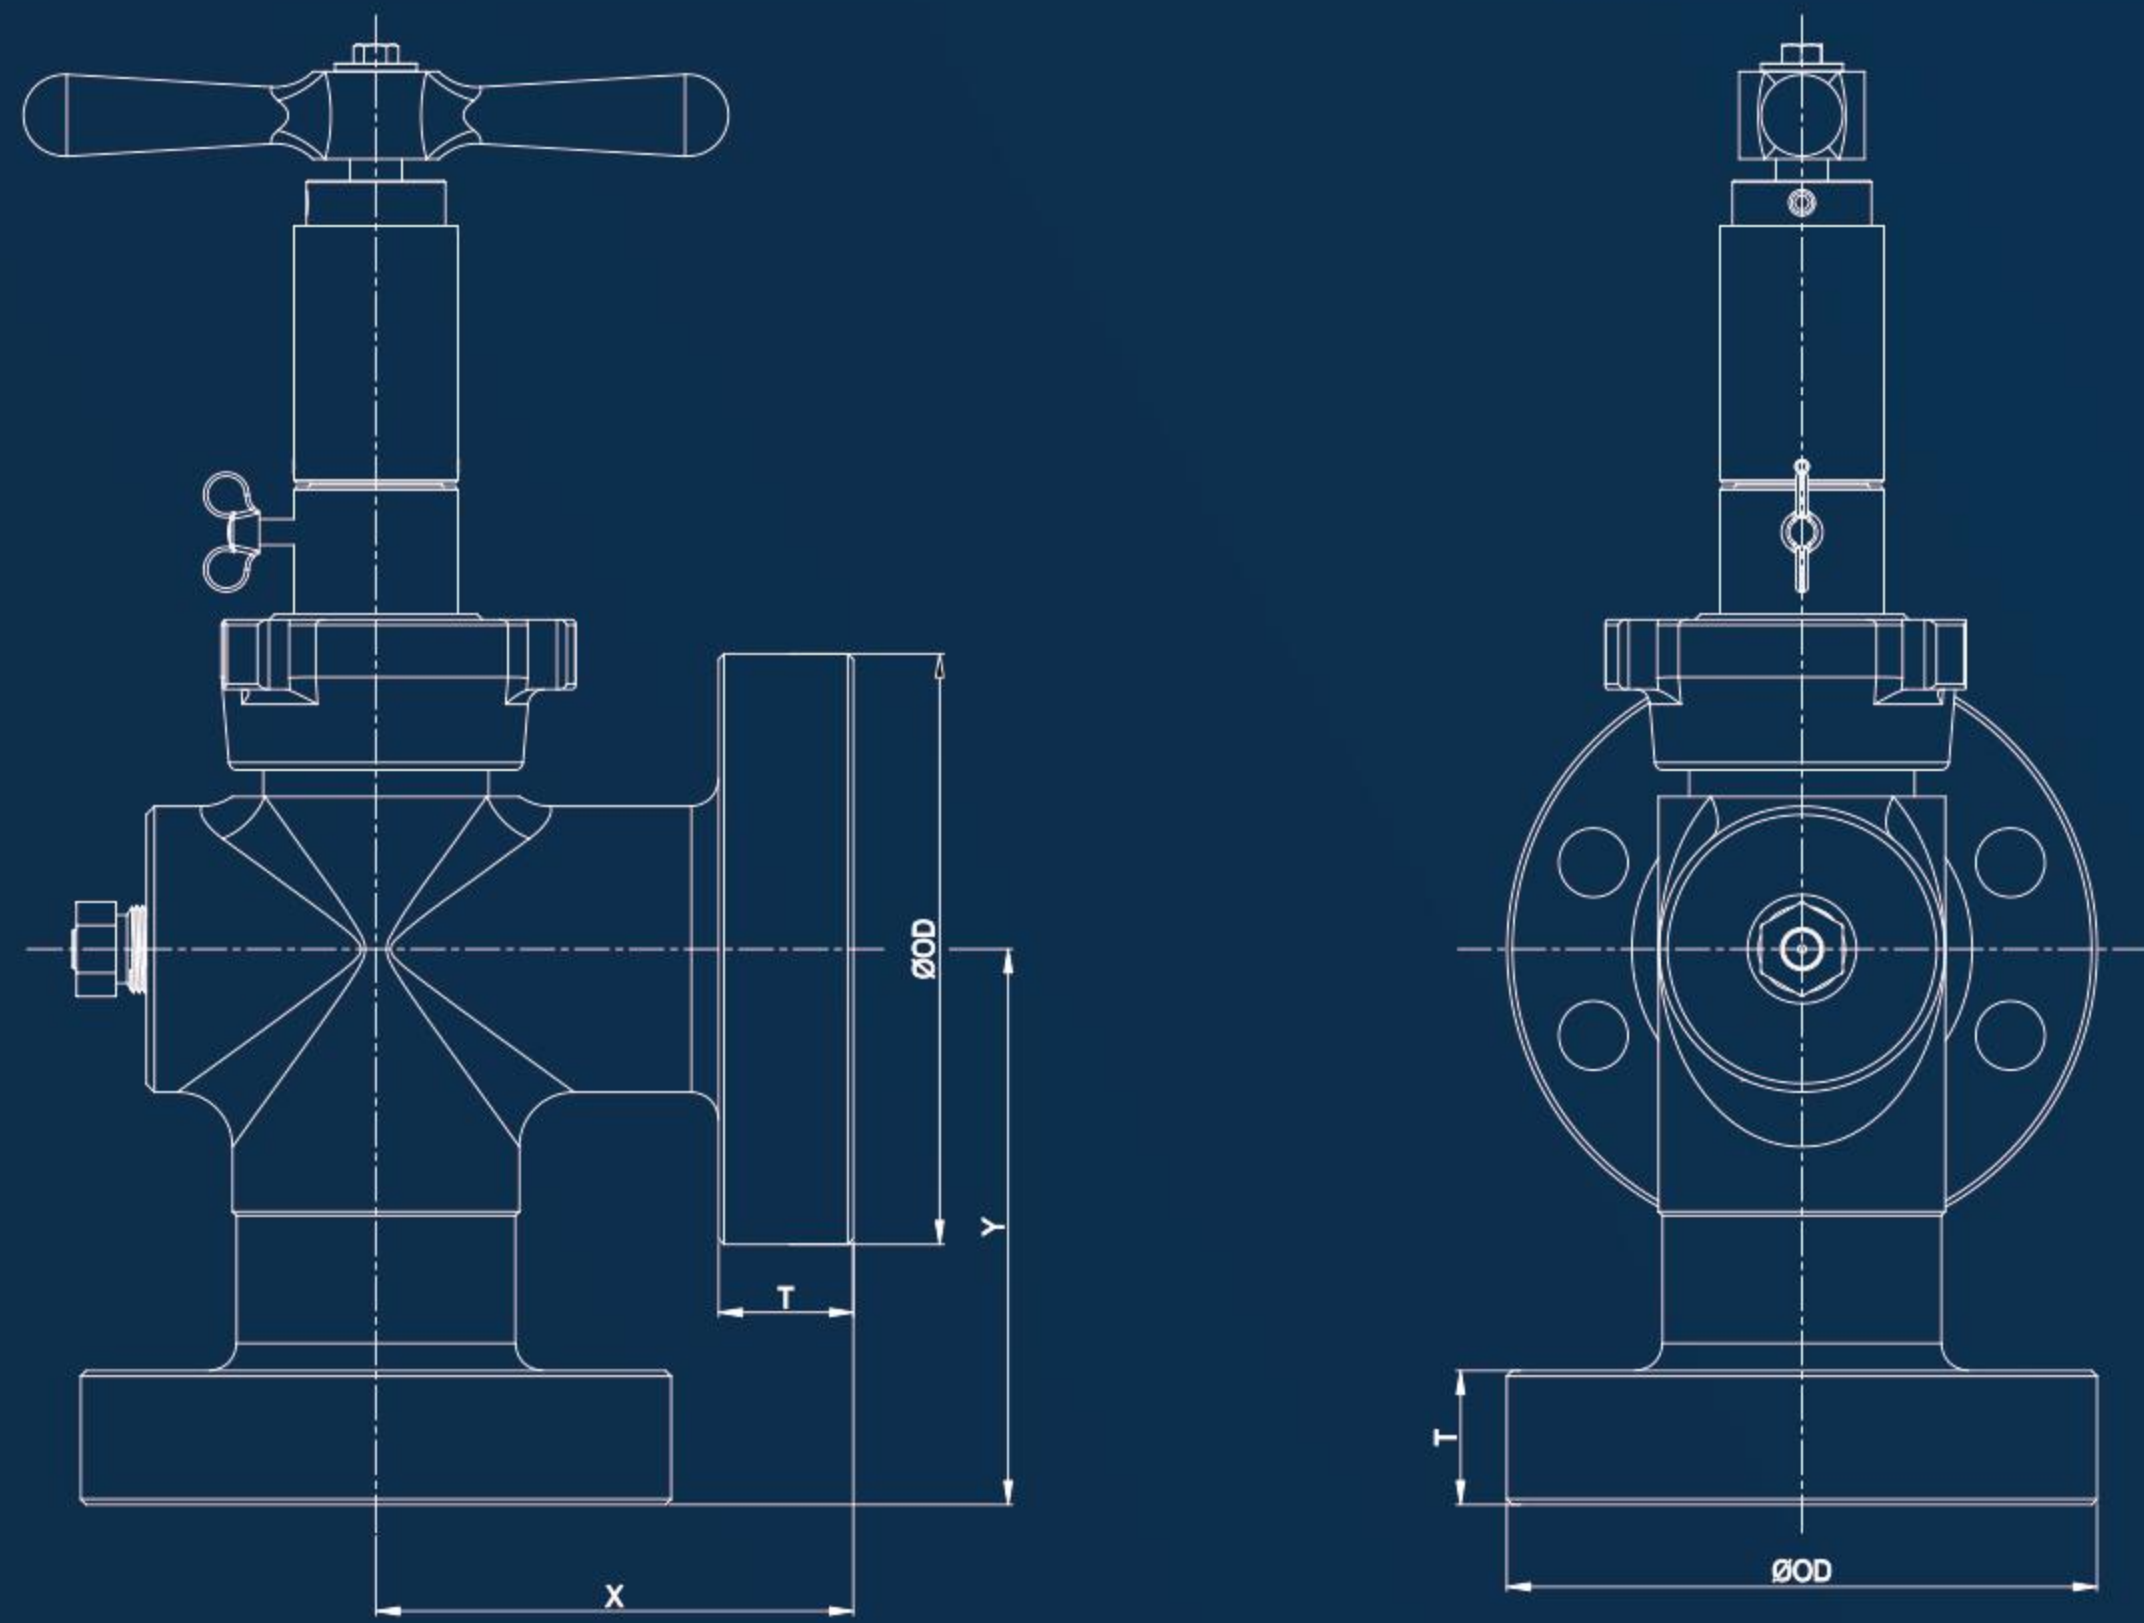

2"LP	2"LP	3000	3-7/16"	PMR
2"LP	2"LP	5000	3-7/16"	PMR
2-1/16"2000Flg	2"LP	2000	6-11/16"	PMR
2-1/16"5000Flg	2"LP	3000	6-7/8"	PMR
2-1/16"5000Flg	2"LP	5000	6-7/8"	PMR
2-1/16"2000Flg	2-1/16"2000Flg	2000	6-11/16"	7-13/16"
2-1/16"5000Flg	2-1/16"5000Flg	3000	6-7/8"	8"
2-1/16"5000Flg	2-1/16"5000Flg	5000	6-7/8"	8"
2-9/16"5000Flg	2-9/16"5000Flg	3000	6-15/16"	8-1/4"
2-9/16"5000Flg	2-9/16"5000Flg	5000	6-15/16"	8-1/4"
3-1/8"3000Flg	3-1/8"3000Flg	3000	7-13/16"	8-15/16"
3-1/8"5000Flg	3-1/8"5000Flg	5000	9-11/16"	9-9/16"
1-13/16"10000Flg	1-13/16"10000Flg	10000	7-11/16"	8-13/16"
2-1/16"10000Flg	2-1/16"10000Flg	10000	7-11/16"	8-13/16"
2-1/16"10000Flg	2-1/16"10000Flg	10000	8-3/16"	PMR
1-13/16"15000Flg	1-13/16"15000Flg	15000	8-13/32"	PMR
2-1/16"15000Flg	2-1/16"15000Flg	15000	8-7/8"	PMR
2-9/16"15000Flg	2-9/16"15000Flg	15000	10-1/2"	11-3/4"
3-1/16"15000Flg	3-1/16"15000Flg	15000	10-11/32"	11-5/8"

■ Parameter

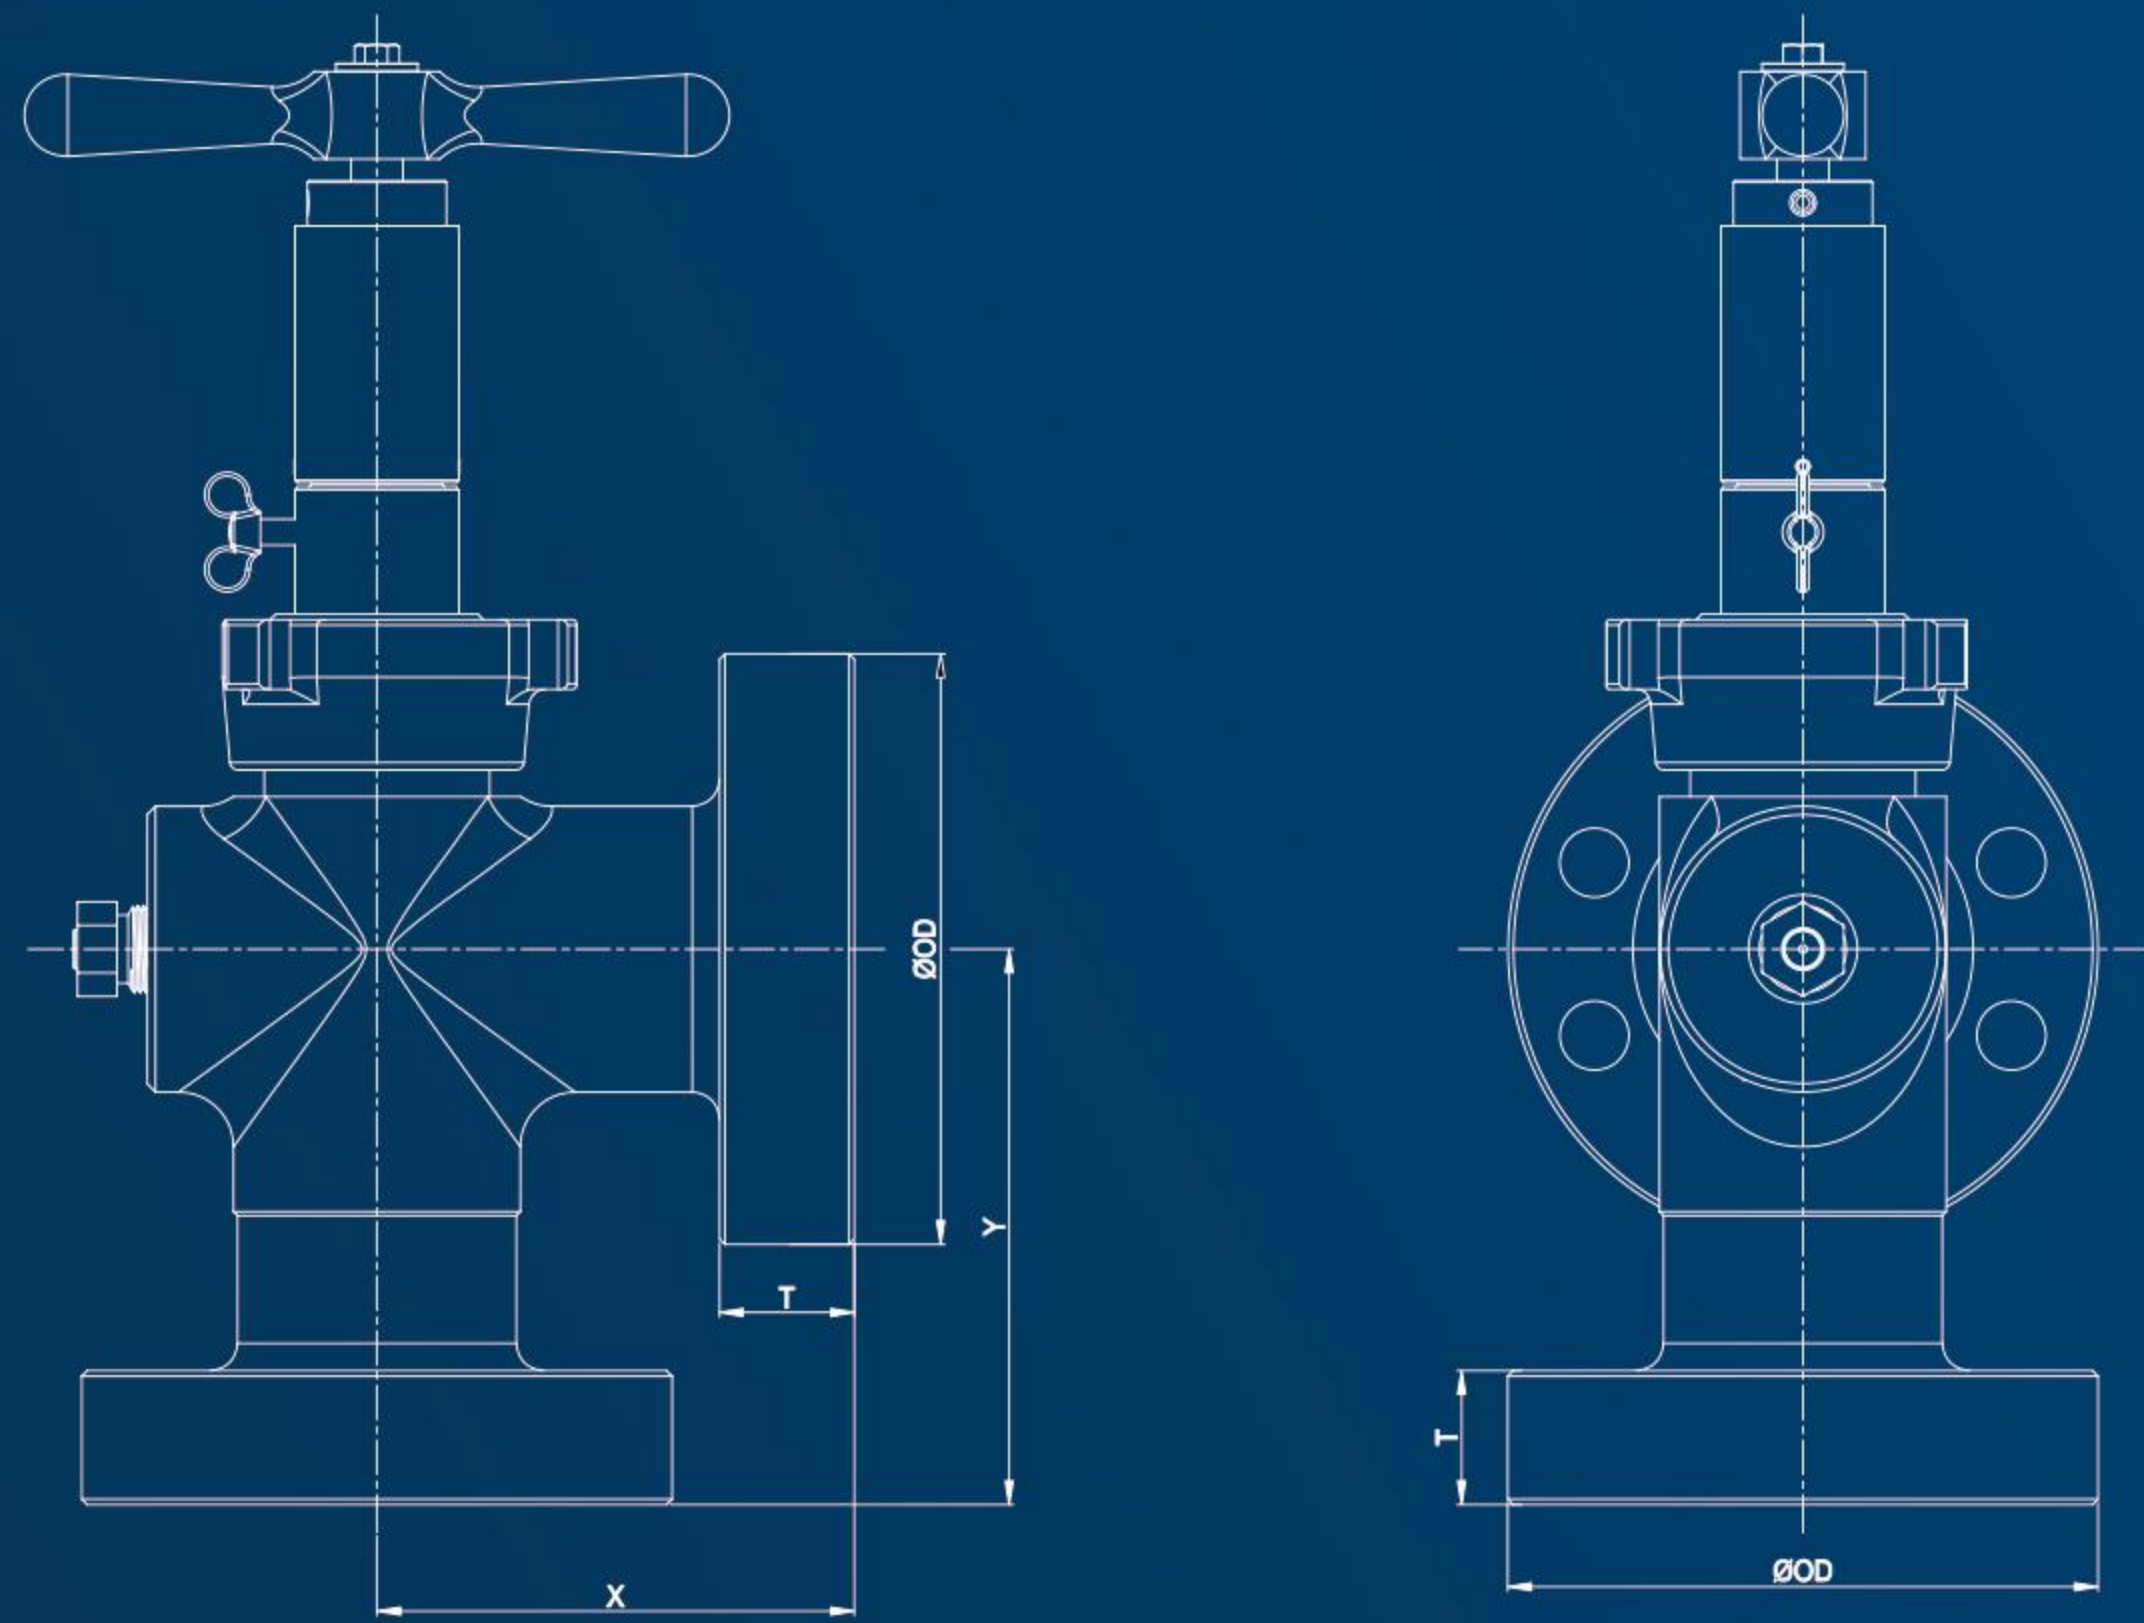


2"Maximum Qrifice

3"LP	3"LP	3000	4-1/2"	7"
3-1/8"3000Flg	3"LP	3000	8-7/8"	7"
3-1/8"5000Flg	3"LP	3000	8-7/8"	7"
2-1/16"5000Flg	2-1/16"5000Flg	5000	8-15/16"	11-7/16"
2-9/16"5000Flg	2-9/16"5000Flg	5000	8-7/8"	11-3/4"
3-1/8"2000Flg	3-1/8"2000Flg	2000	8-7/8"	11-3/8"
3-1/8"3000Flg	3-1/8"3000Flg	3000	8-7/8"	11-3/8"
3-1/8"5000Flg	3-1/8"5000Flg	5000	8-7/8"	11-3/8"
4-1/16"3000Flg	4-1/16"3000Flg	3000	10-3/8"	11-3/8"
4-1/16"5000Flg	4-1/16"5000Flg	5000	10-1/8"	12-1/8"
2-1/16"10000Flg	2-1/16"10000Flg	10000	10-3/8"	12"
2-9/16"10000Flg	2-9/16"10000Flg	10000	10-3/8"	11-3/4"
3-1/16"10000Flg	3-1/16"10000Flg	10000	10-3/8"	11-3/4"
4-1/16"10000Flg	4-1/16"10000Flg	10000	9-15/16"	11-1/2"

3"Maximum Qrifice

4"LP	4"LP	3000	6-3/4"	7-1/4"
4-1/16"3000Flg	4"LP	3000	9-1/4"	7-3/4"
3-1/8"5000Flg	3-1/8"5000Flg	5000	14-7/16"	15-15/16"
4-1/16"3000Flg	4-1/16"3000Flg	3000	9-1/4"	9-1/4"
4-1/16"5000Flg	4-1/16"5000Flg	5000	12-1/4"	12-1/4"


CASING HEAD

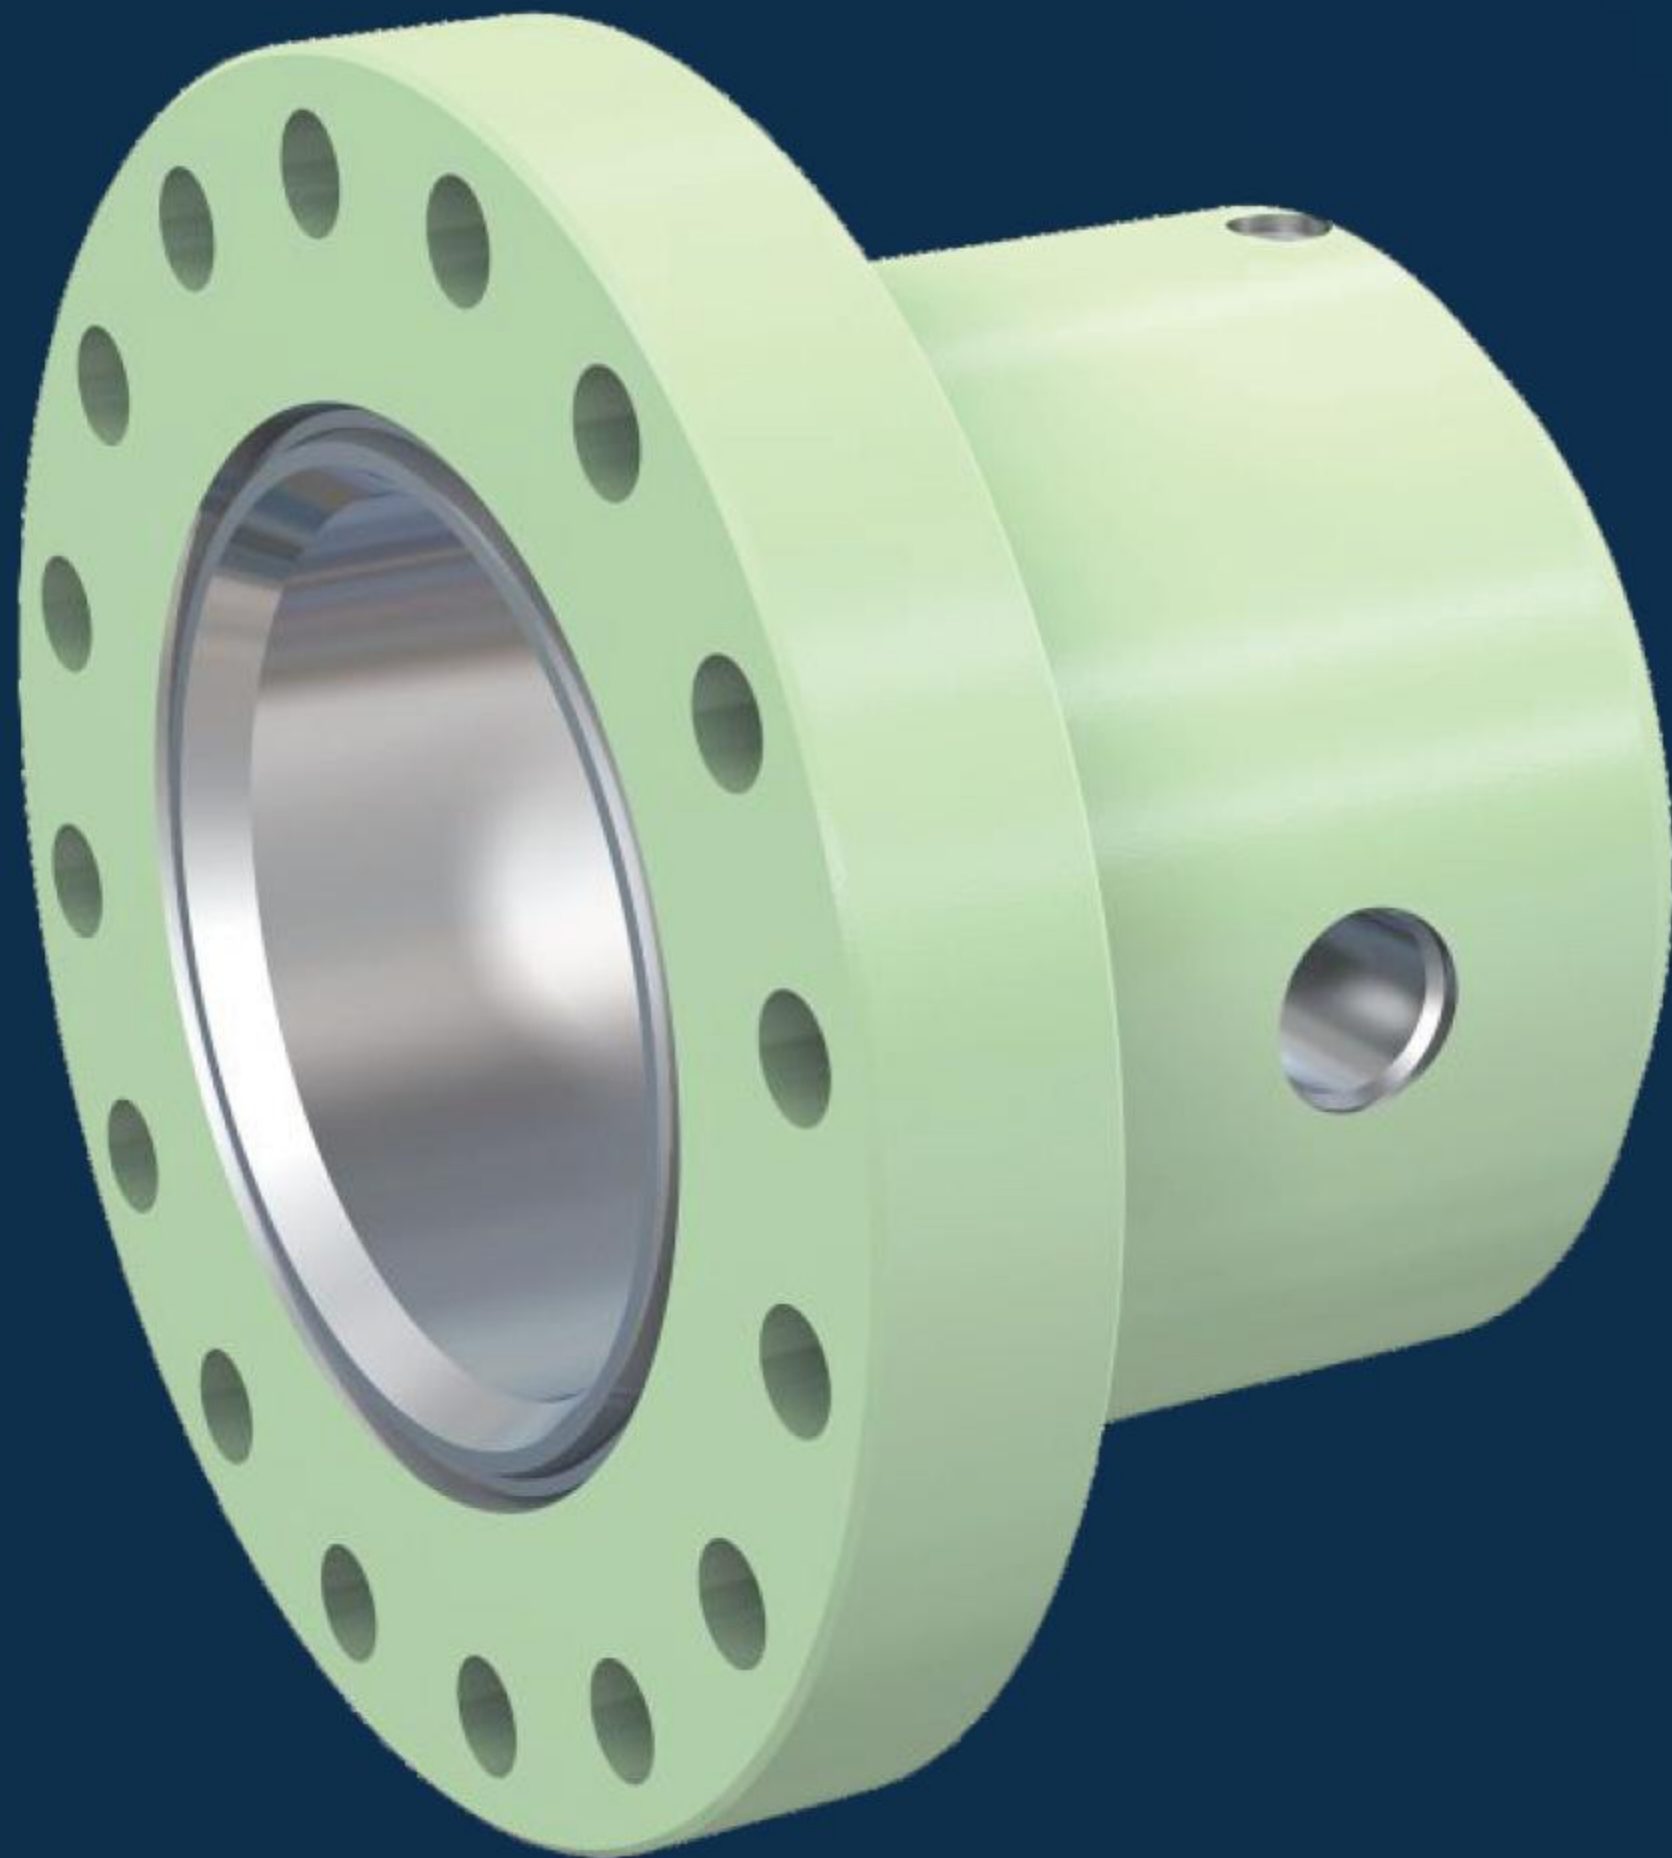


Advantage

- According to customer requirements, the body is forged, can be overhelled carbide, reliable and durable.

Standard	API Spec 6A
Work Pressure	2000PSI - 15000PSI
Material Class	AA, BB, CC, DD, EE, FF, HH
Temperature Class	PU LU
Performance Class	PR1
Specification Class	PSL1 - PSL3/PSL3G

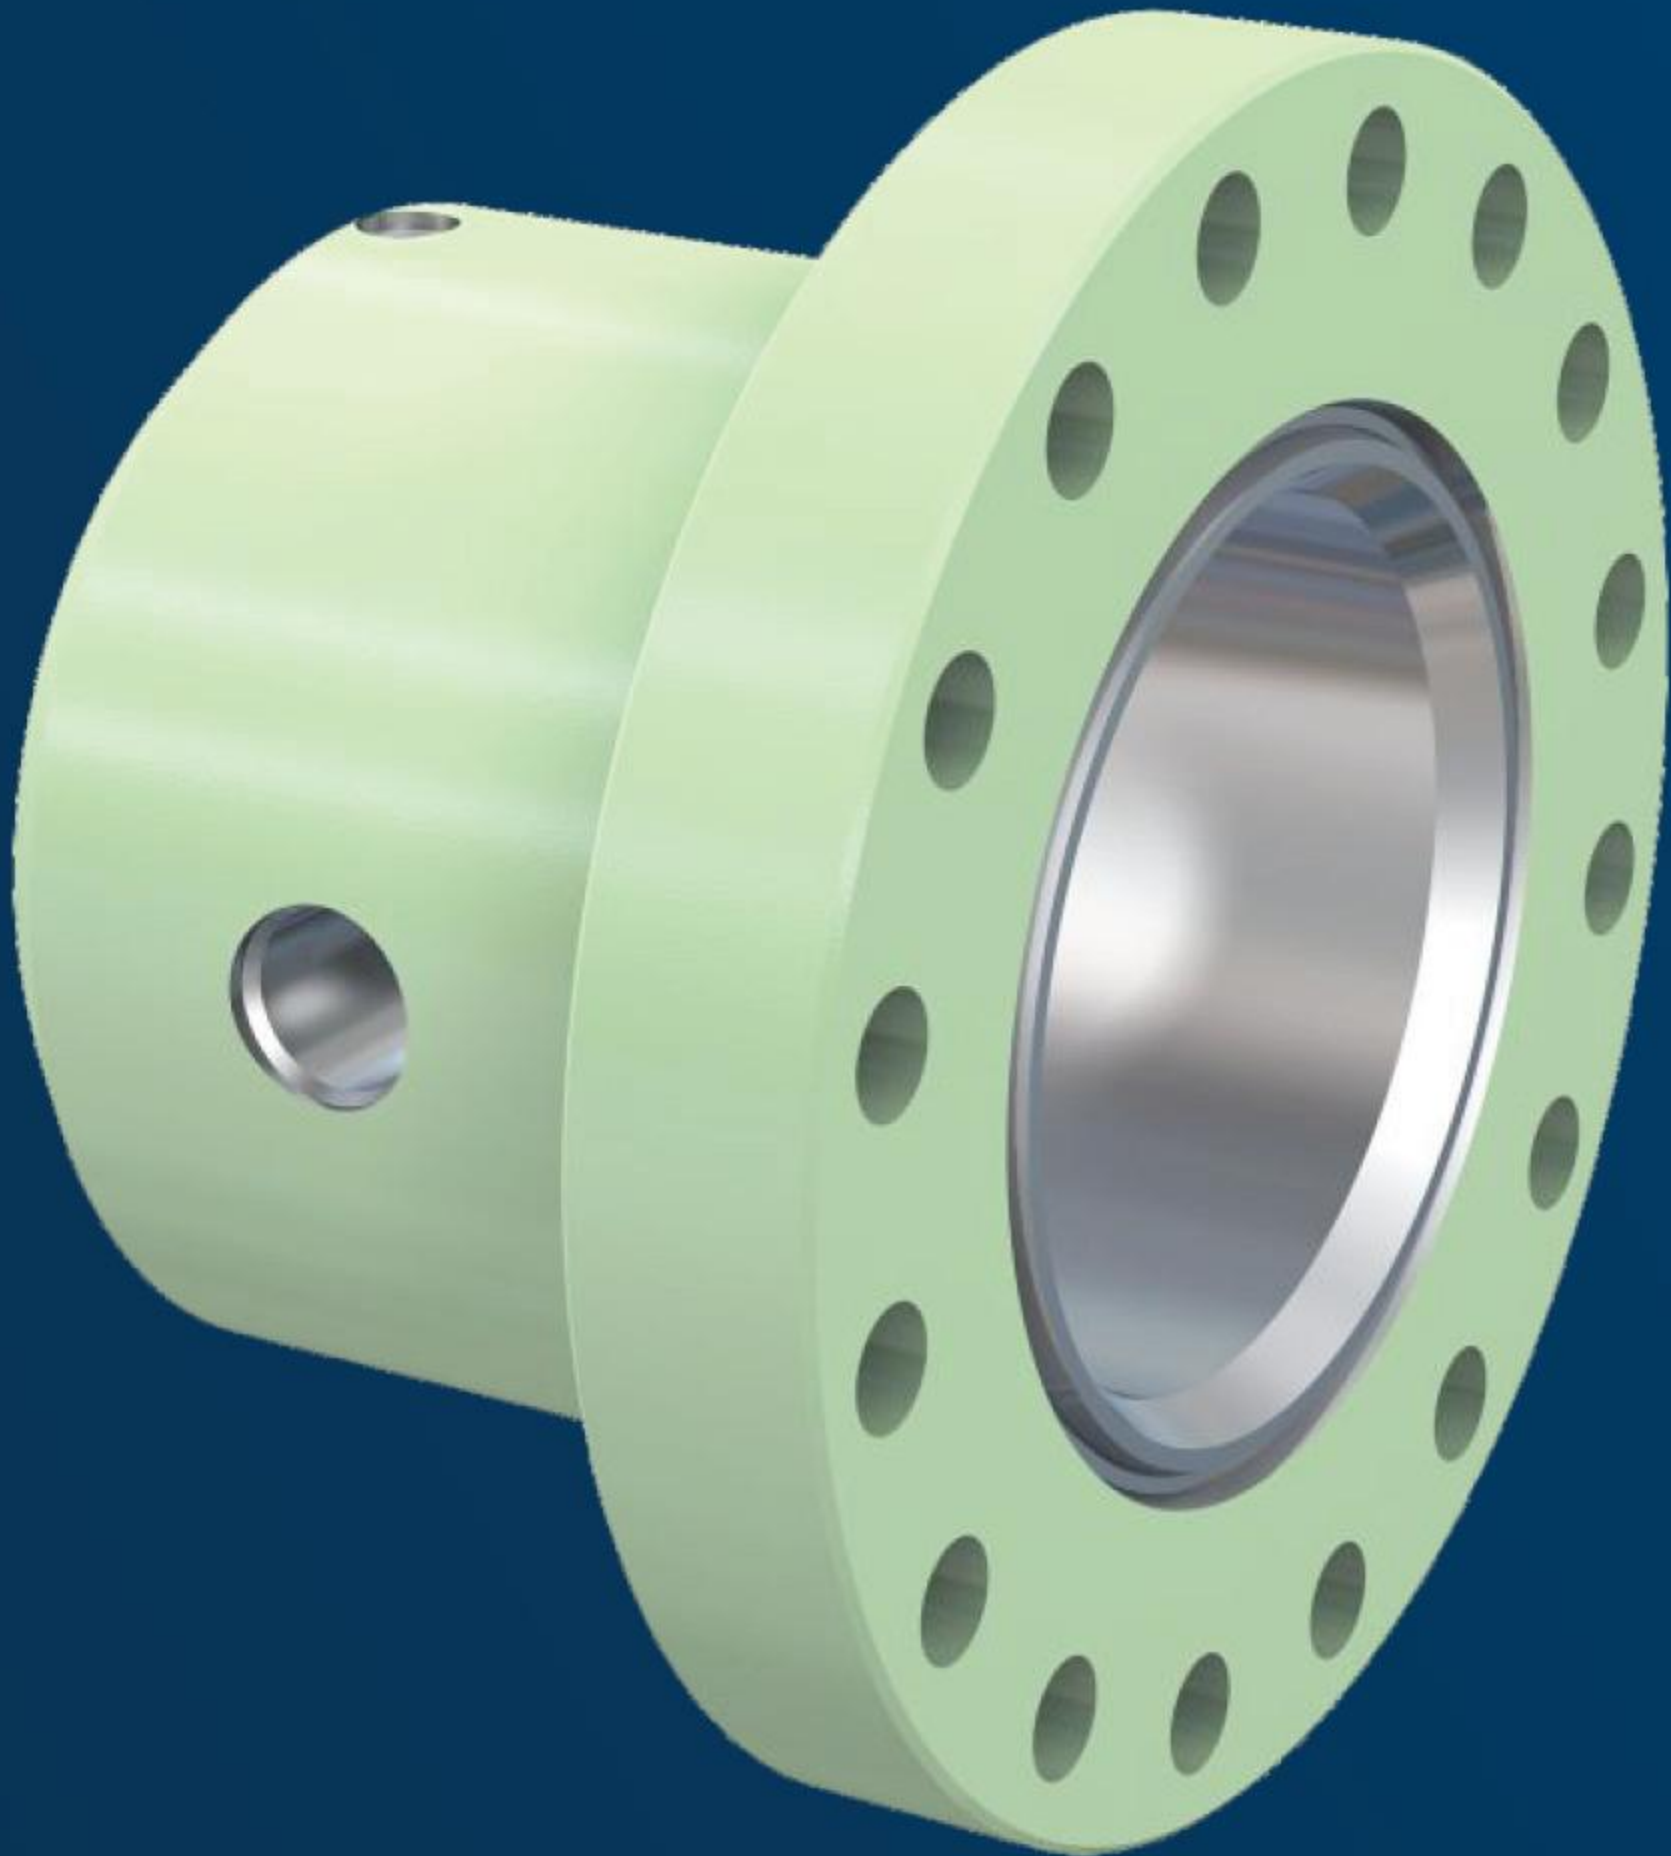


Parameter

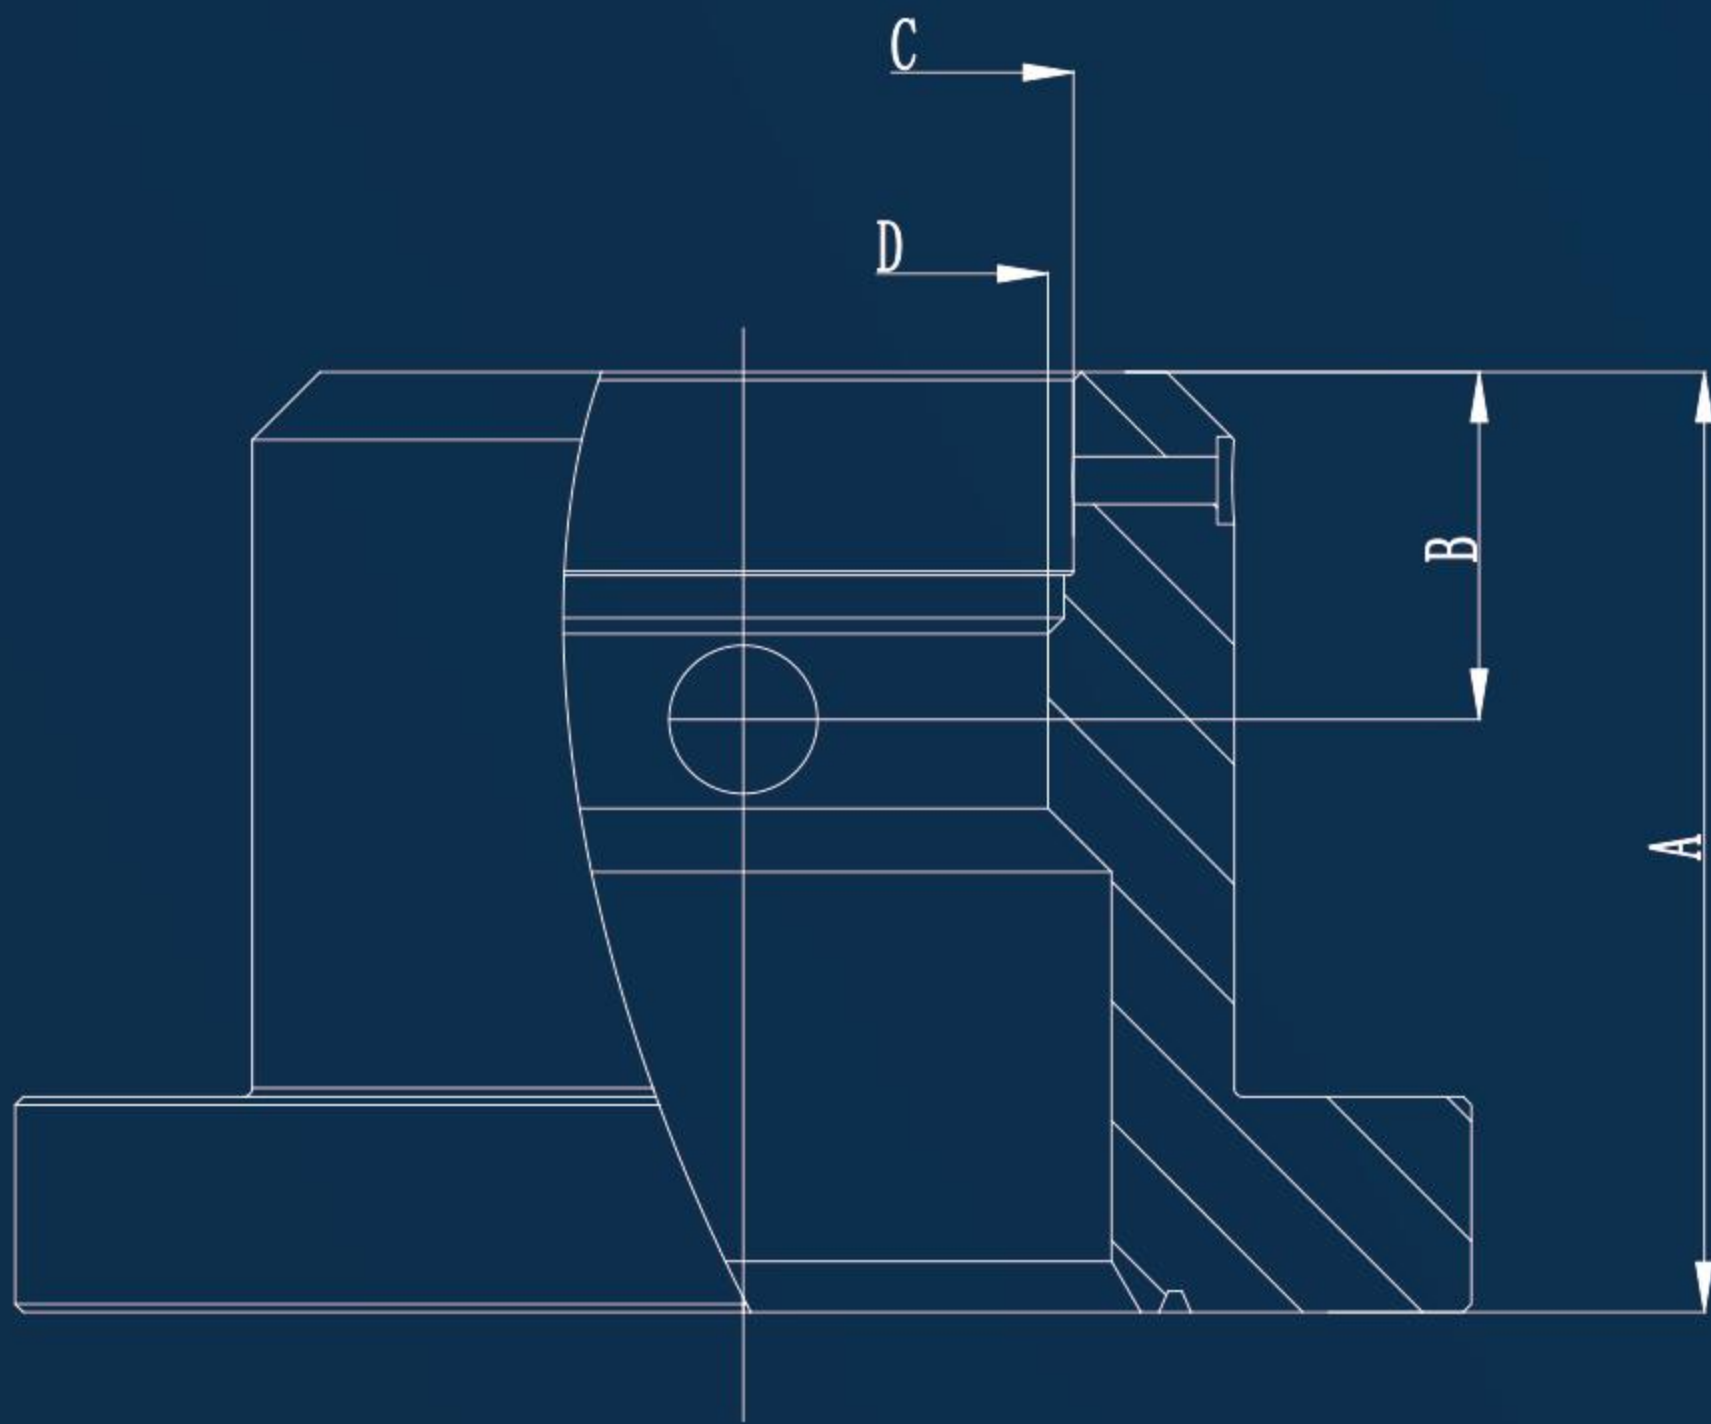

Size:mm

Flange size	Psi	Casing size	A	B	C	D
11	3000	8-5/8	508	308	276.2	203.2
11	3000	9-5/8	508	308	276.2	228.6
11	3000	10-3/4	508	308	276.2	254.0
11	5000	8-5/8	508	317.5	276.2	203.2
11	5000	9-5/8	508	317.5	276.2	228.6
11	5000	10-3/4	508	317.5	276.2	254.0
13-5/8	3000	11-3/4	533.4	311.2	342.9	279.4
13-5/8	3000	13-3/8	533.4	311.2	342.9	317.5
13-5/8	5000	11-3/4	558.8	311.2	342.9	314.3
16-3/4	2000	13-3/8	482.6	317.5	422.3	317.5
16-3/4	2000	16	533.4	317.5	422.3	387.4
16-3/4	3000	13-3/8	558.8	320.7	422.3	317.5
16-3/4	3000	16	558.8	320.7	422.3	381
21-1/4	2000	18-5/8	508	311.2	511.2	457.2
21-1/4	2000	20	558.8	311.2	511.2	482.6
20-3/4	3000	18-5/8	635	431.8	511.2	457.2
20-3/4	3000	20	635	431.8	511.2	482.6



Parameter

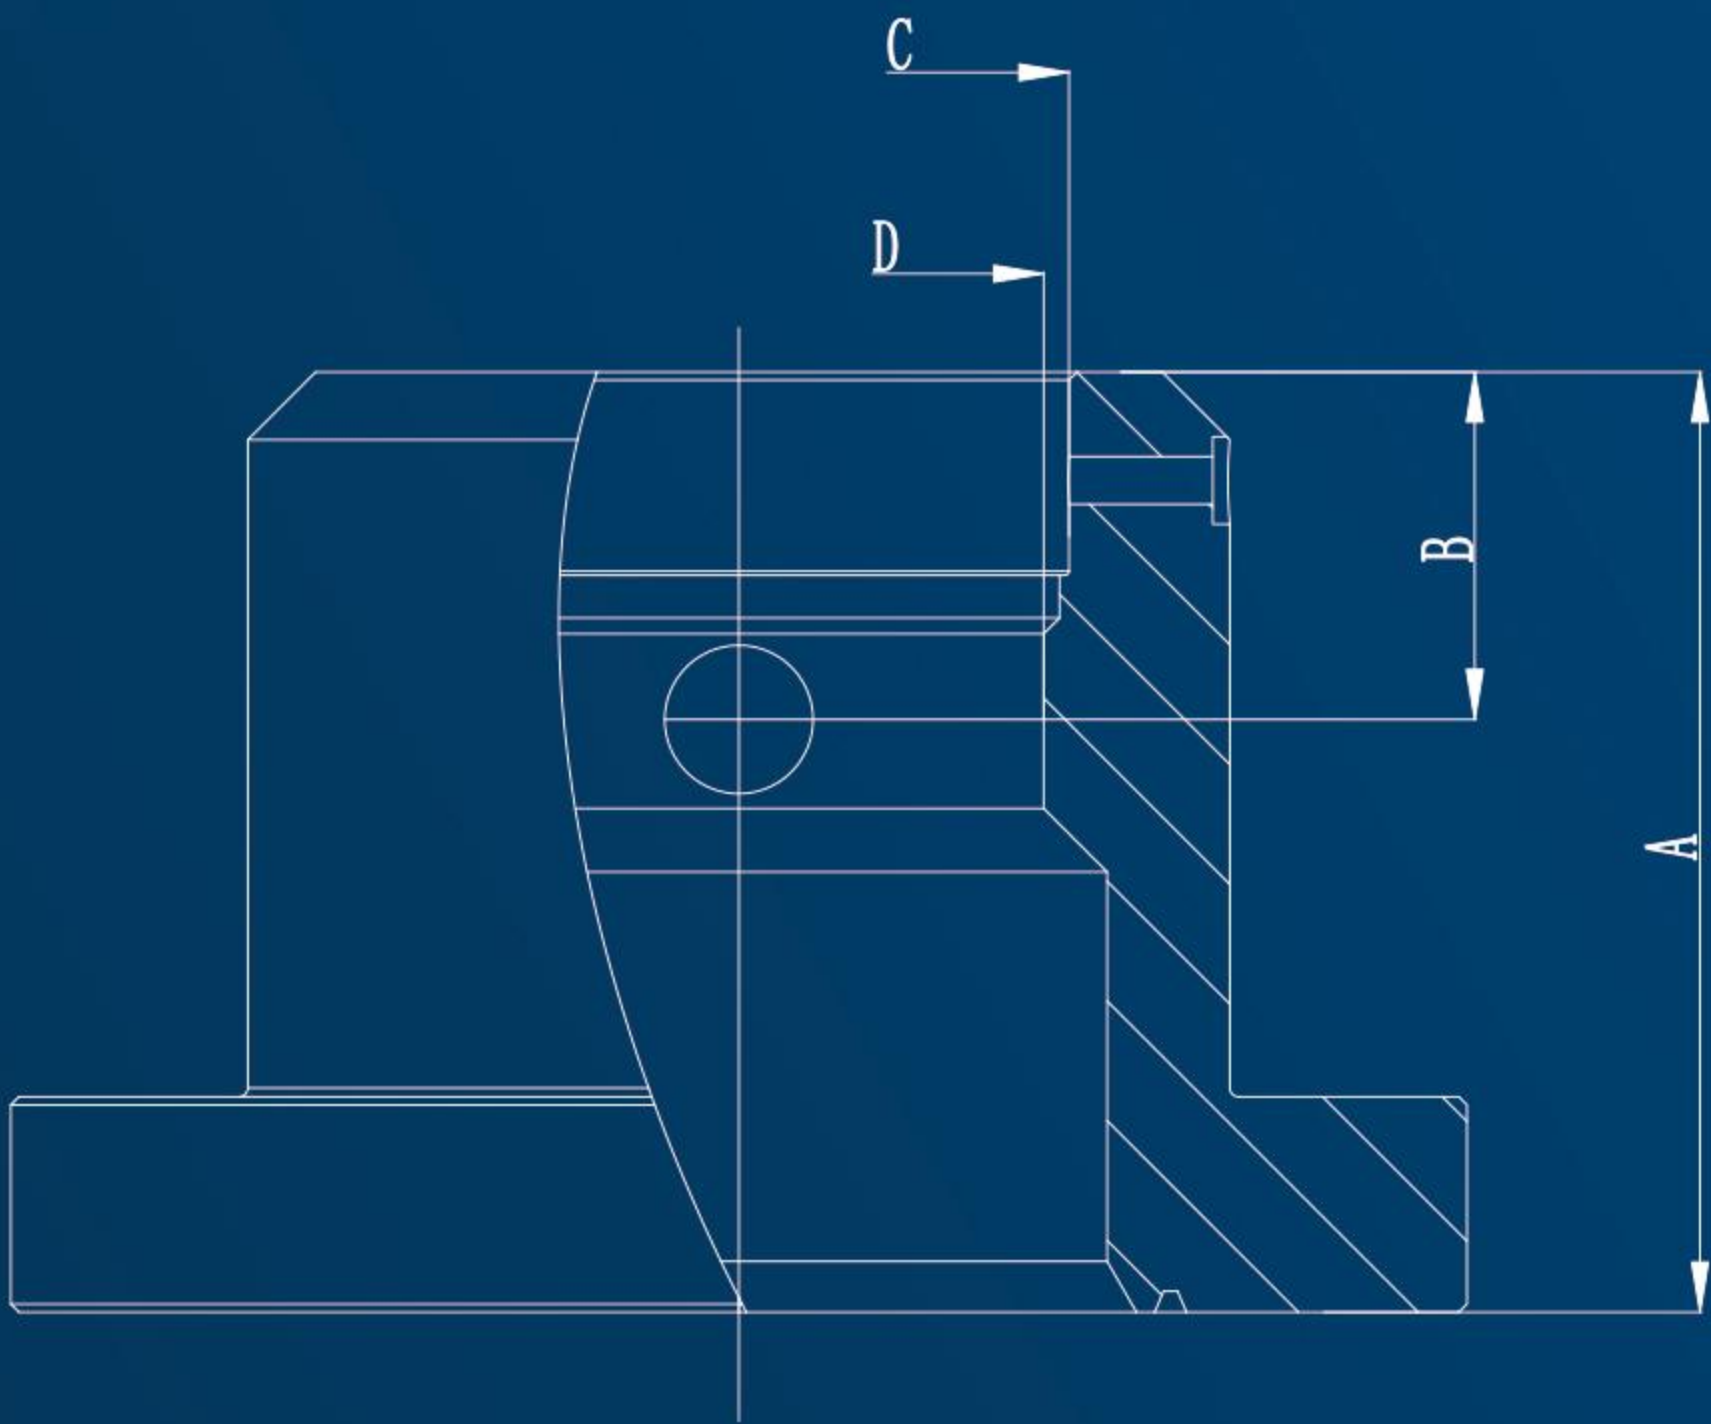

Size:in

Flange size	Psi	Casing size	A	B	C	D
11	3000	8-5/8	20	12-1/8	10-7/8	8
11	3000	9-5/8	20	12-1/8	10-7/8	9
11	3000	10-3/4	20	12-1/8	10-7/8	10
11	5000	8-5/8	20	12-1/2	10-7/8	8
11	5000	9-5/8	20	12-1/2	10-7/8	9
11	5000	10-3/4	20	12-1/2	10-7/8	10
13-5/8	3000	11-3/4	21	12-1/4	13-1/2	11
13-5/8	3000	13-3/8	21	12-1/4	13-1/2	12-1/2
13-5/8	5000	11-3/4	22	12-1/4	13-1/2	12-3/8
16-3/4	2000	13-3/8	19	12-1/2	16-5/8	12-1/2
16-3/4	2000	16	21	12-1/2	16-5/8	15-1/4
16-3/4	3000	13-3/8	22	12-5/8	16-5/8	12-1/2
16-3/4	3000	16	22	12-5/8	16-5/8	15
21-1/4	2000	18-5/8	20	12-1/4	20-1/8	18
21-1/4	2000	20	22	12-1/4	20-1/8	19
20-3/4	3000	18-5/8	25	17	20-1/8	18
20-3/4	3000	20	25	17	20-1/8	19

THREE-WAY FOUR-WAY

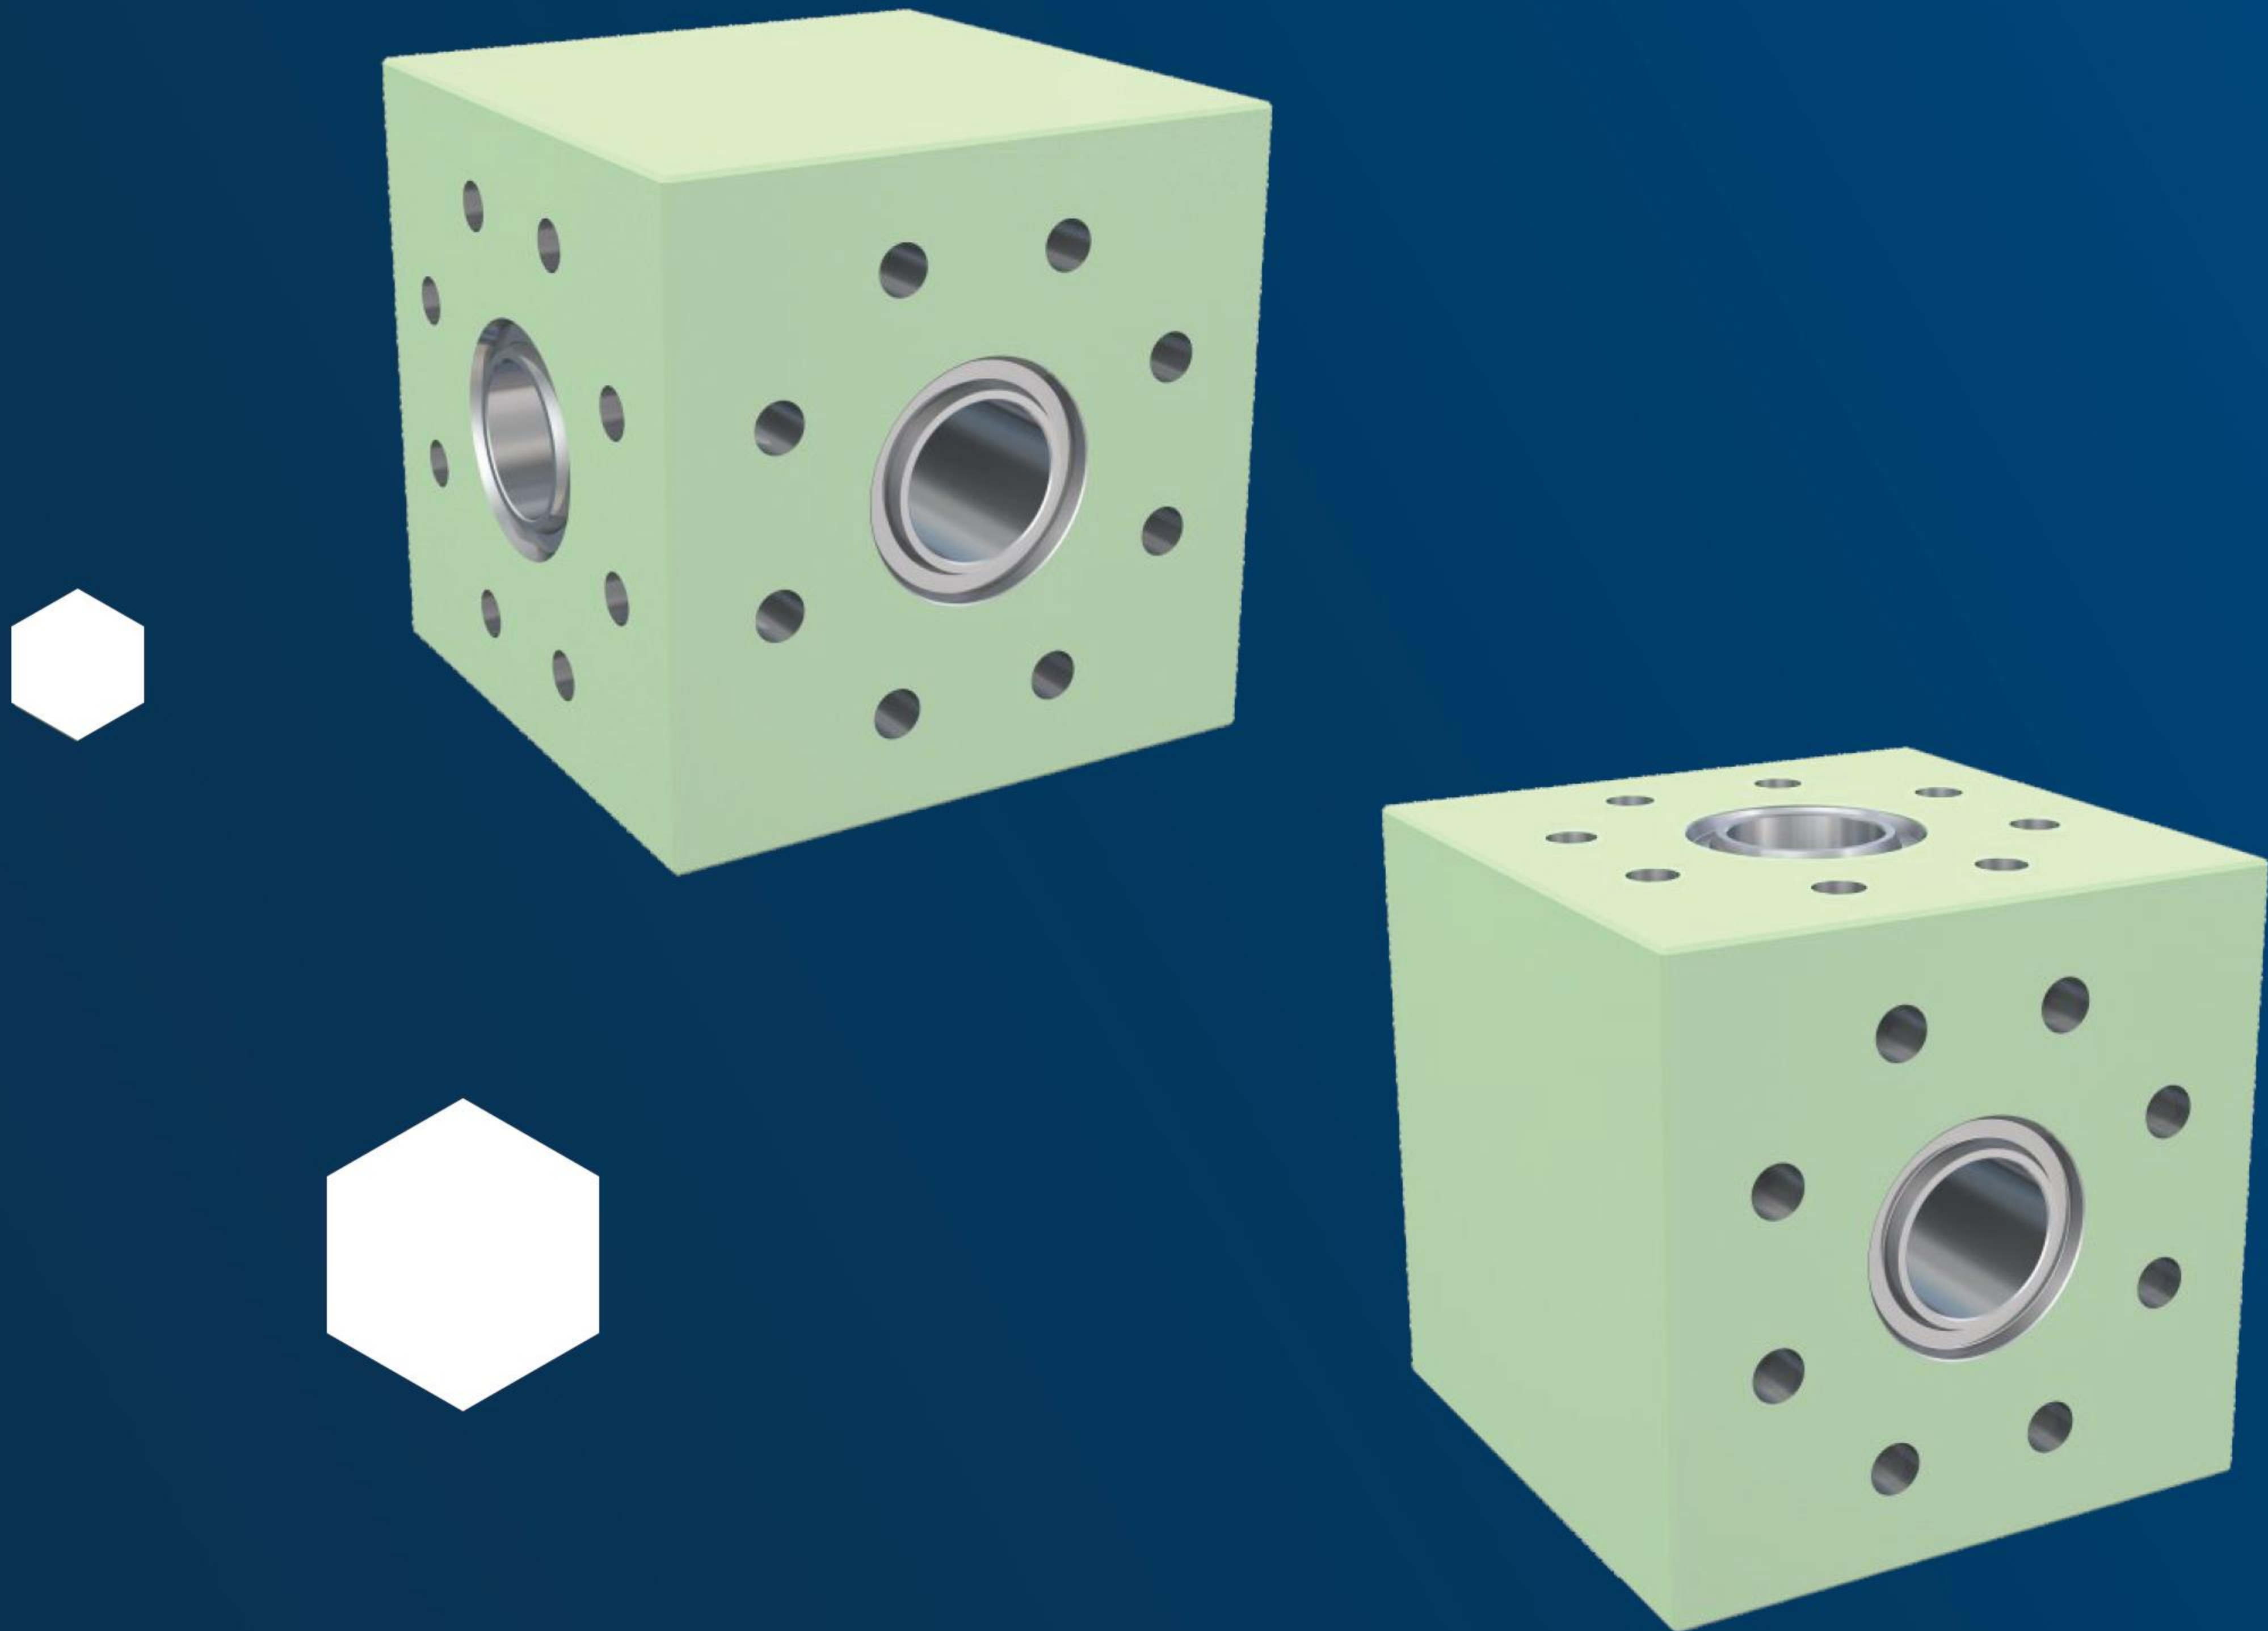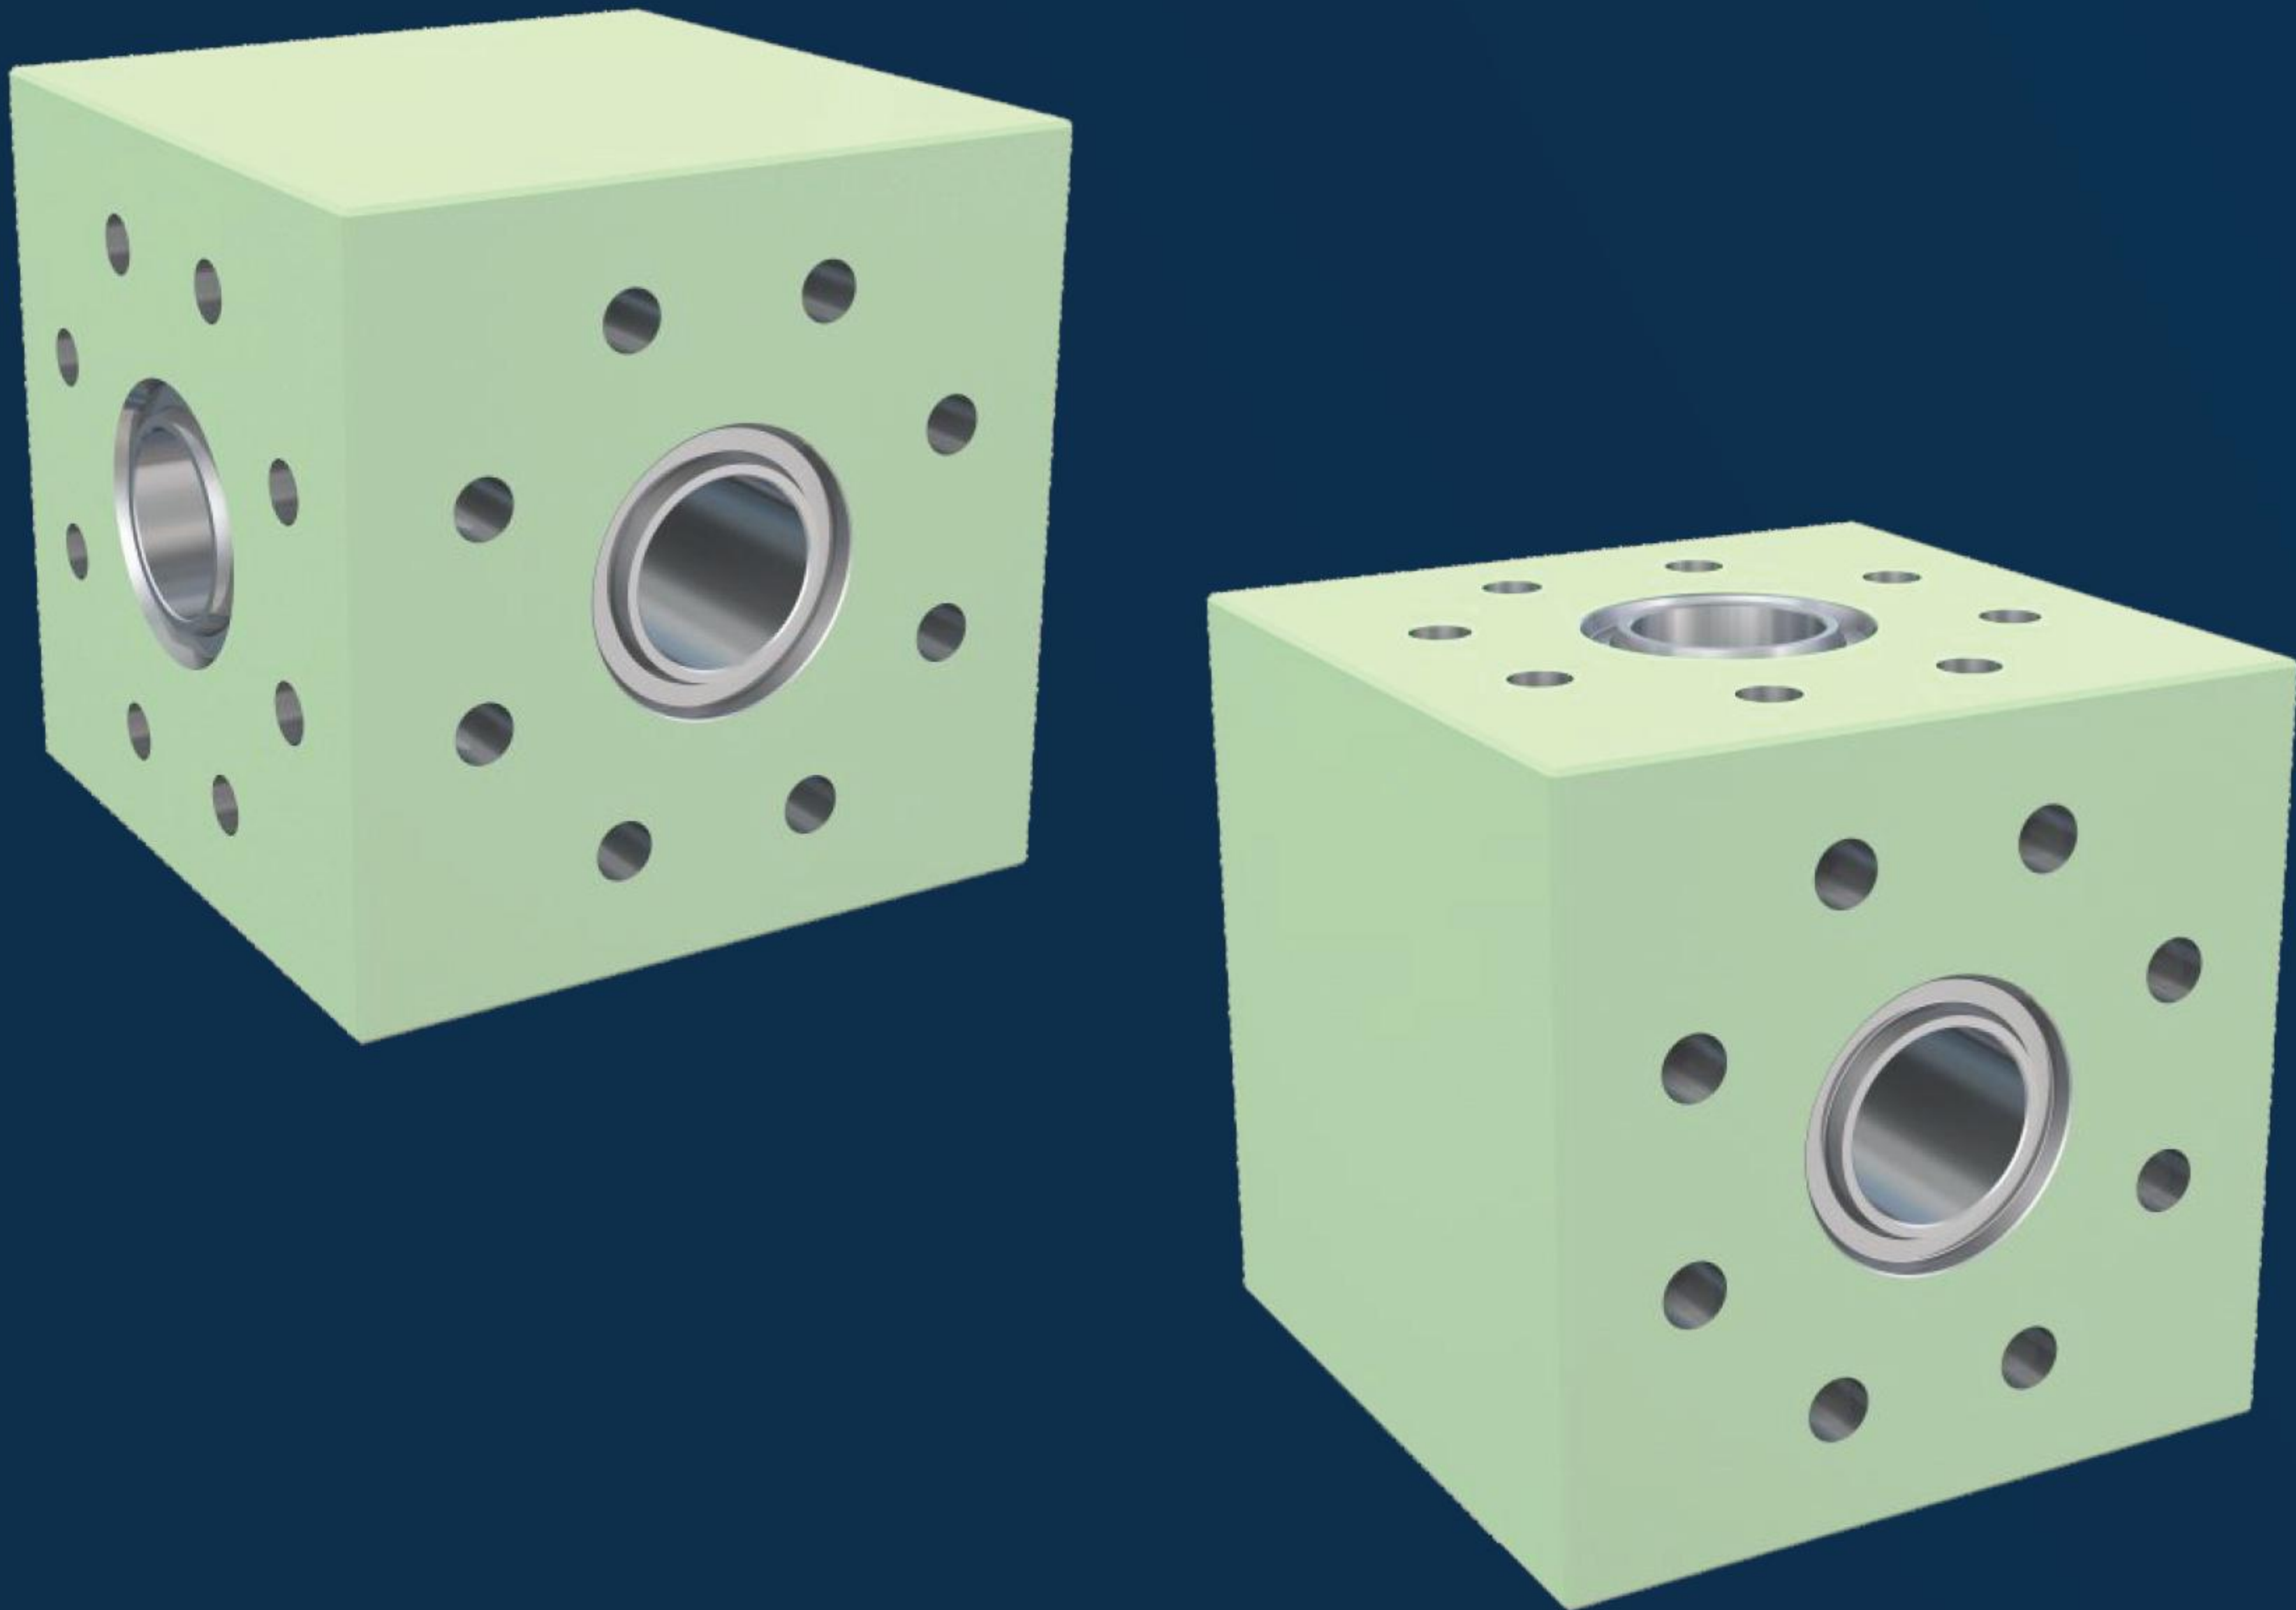


Advantage

- According to customer requirements, the body is forged, can be overhelled carbide, reliable and durable.

Standard	API Spec 6A
Work Pressure	2000PSI - 15000PSI
Nominal diameter	1-13/16" ~ 7-1/16"
Material Class	AA, BB, CC, DD, EE, FF, HH
Temperature Class	PU LU
Performance Class	PR1 PR2
Specification Class	PSL1 - PSL3/PSL3G

Parameter

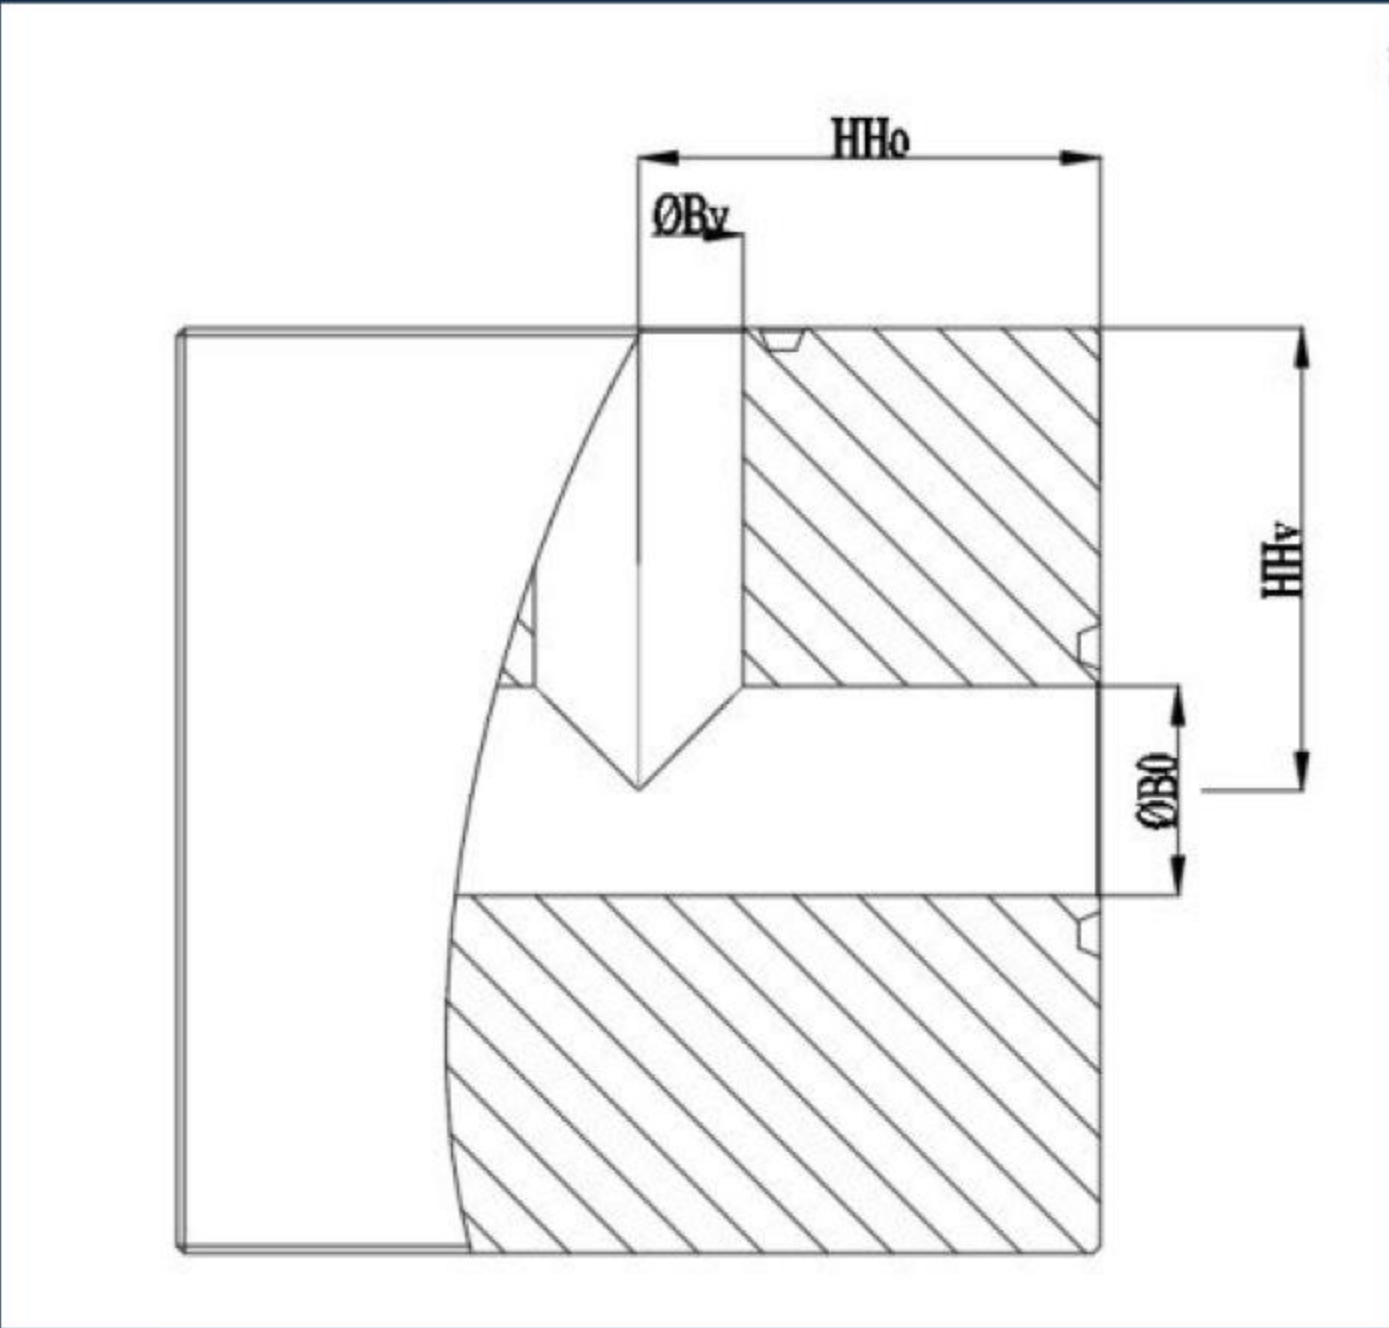

Size:mm

Bottom flange	Aperture		HHv	Hho
	Bv	Bo		
	13.8Mpa			
2-1/16x2-1/16	52.3	52.3	89.0	89
2-9/16x2-1/16	65.0	52.3	89.0	101.5
2-9/16x2-9/16	65.0	65.0	114.5	114.5
3-1/8x2-1/16	79.3	52.3	89.0	114.5
3-1/8x2-9/16	79.3	65.0	114.5	114.5
3-1/8x3-1/8	79.3	79.3	114.5	114.5
4-1/16x2-1/16	103.1	52.3	114.5	139.5
4-1/16x2-9/16	103.1	65.0	114.5	139.5
4-1/16x3-1/8	103.1	79.3	114.5	139.5
4-1/16x4-1/16	103.1	103.1	114.5	139.5

20.7Mpa				
2-1/16x2-1/16	52.3	52.3	114.5	114.5
2-9/16x2-1/16	65.0	52.3	114.5	127.0
2-9/16x2-9/16	65.0	65.0	127.0	127.0
3-1/8x2-1/16	79.3	52.3	114.5	127.0
3-1/8x2-9/16	79.3	65.0	127.0	127.0
3-1/8x3-1/8	79.3	79.3	127.0	127.0
4-1/16x2-1/16	103.1	52.3	114.5	155.5
4-1/16x2-9/16	103.1	65.0	127.0	155.5
4-1/16x3-1/8	103.1	79.3	127.0	155.5
4-1/16x4-1/16	103.1	103.1	155.5	155.5


Parameter

Size:mm

Bottom flange	Aperture		HHv	Hho
	Bv	Bo		
	34.5Mpa			
2-1/16x2-1/16	52.3	52.3	114.5	114.5
2-9/16x2-1/16	65.0	52.3	114.5	127.0
2-9/16x2-9/16	65.0	65.0	127.0	127.0
3-1/8x2-1/16	79.3	52.3	114.5	139.5
3-1/8x2-9/16	79.3	65.0	139.5	139.5
3-1/8x3-1/8	79.3	79.3	139.5	139.5
4-1/16x2-1/16	103.1	52.3	114.5	165.0
4-1/16x2-9/16	103.1	65.0	127.0	165.0
4-1/16x3-1/8	103.1	79.3	139.5	165.0
4-1/16x4-1/16	103.1	103.1	165.0	165.0
5-1/8x2-1/16	130.1	52.3	155.5	193.5
5-1/8x2-9/16	130.1	65.0	155.5	193.5
5-1/8x3-1/8	130.1	79.3	155.5	193.5
5-1/8x4-1/16	130.1	103.1	202.5	202.5
5-1/8x5-1/8	130.1	130.1	202.5	202.5

69.0Mpa				
1-13/16x1-13/16	46.0	46.0	111.0	111.0
2-1/16x1-13/16	52.3	46.0	111.0	111.0
2-1/16x2-1/16	52.3	52.3	111.0	111.0
2-9/16x1-13/16	65.0	46.0	114.5	130.0
2-9/16x2-1/16	65.0	52.3	114.5	130.0
2-9/16x2-9/16	65.0	65.0	130.0	130.0
3-1/16x1-13/16	79.3	46.0	114.5	149.0
3-1/16x2-1/16	79.3	52.3	115.5	149.0
3-1/16x2-9/16	79.3	65.0	130.0	149.0
3-1/16x3-1/16	79.3	79.3	149.0	149.0
4-1/16x1-13/16	103.1	46.0	114.5	174.5
4-1/16x2-1/16	103.1	52.3	114.5	174.5
4-1/16x2-9/16	103.1	65.0	130.0	174.5
4-1/16x3-1/16	103.1	79.3	149.0	174.5
4-1/16x4-1/16	103.1	103.1	174.5	174.5
5-1/8x1-13/16	130.1	46.0	133.5	197.0
5-1/8x2-1/16	130.1	52.3	133.5	197.0
5-1/8x2-9/16	130.1	65.0	133.5	197.0
5-1/8x3-1/16	130.1	79.3	171.5	197.0
5-1/8x4-1/16	130.1	103.1	171.5	197.0
5-1/8x5-1/8	130.	130.1	197.0	197.0


Parameter

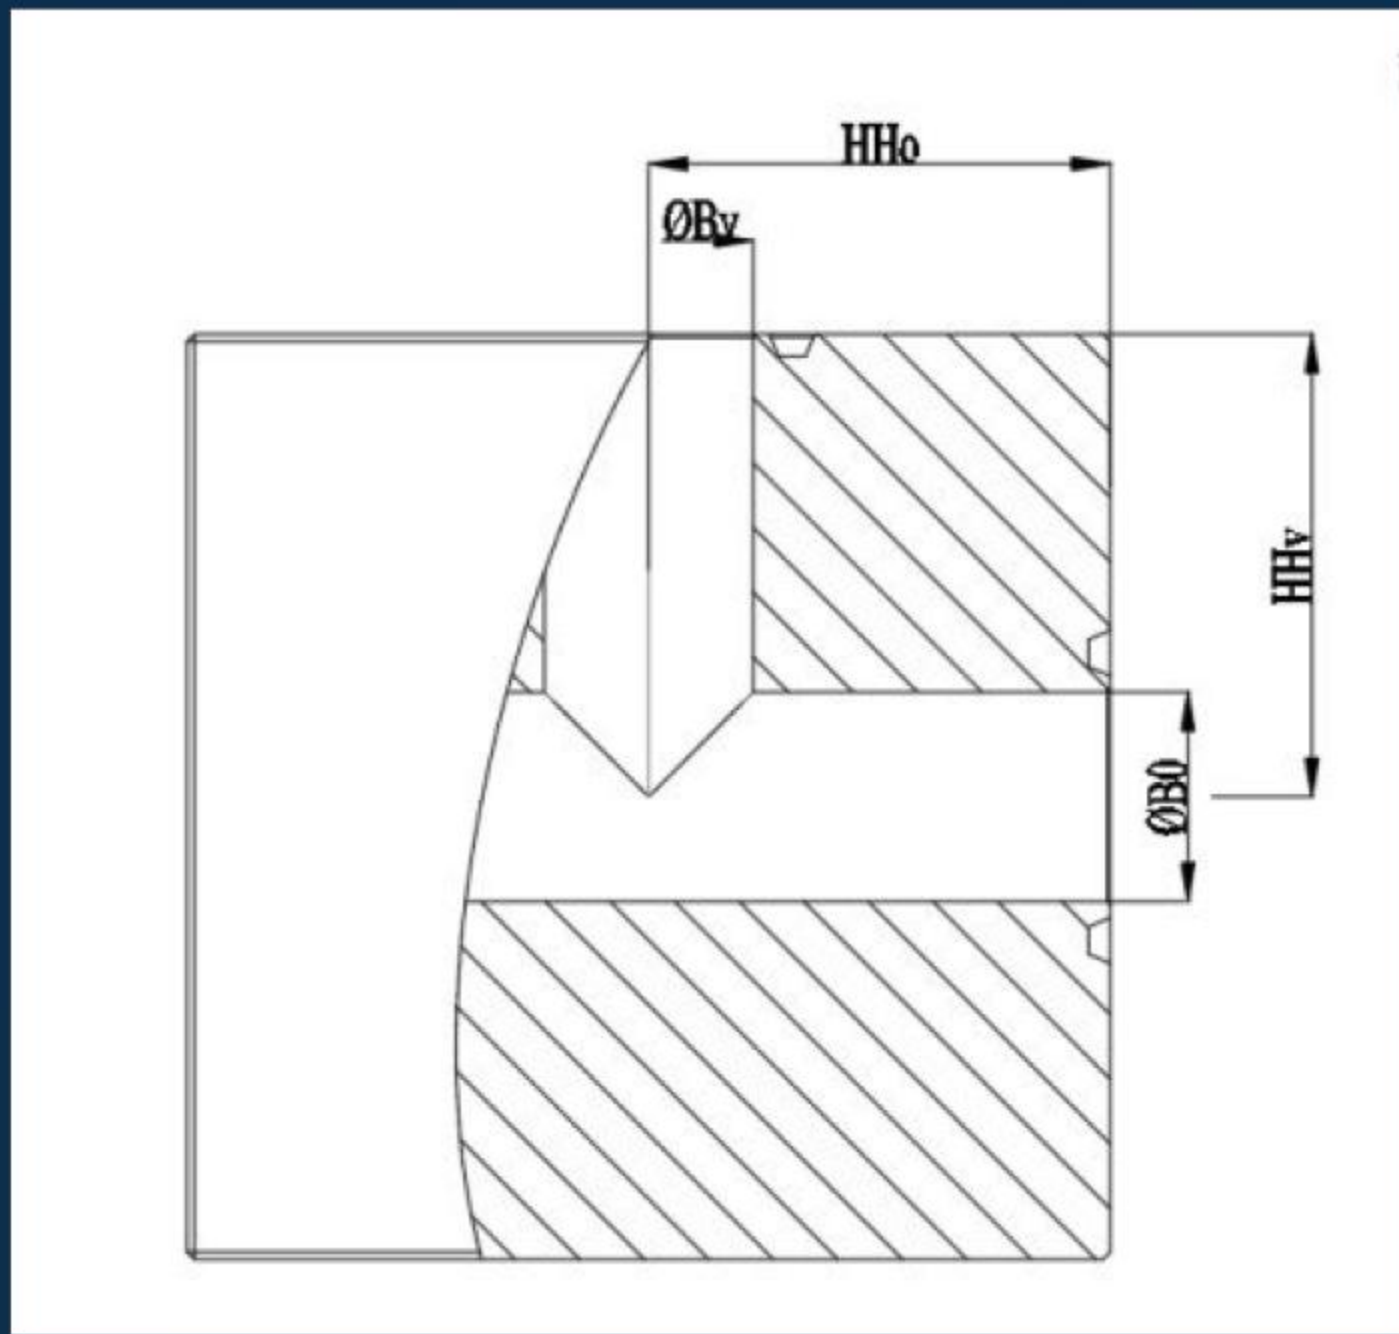

Size:mm

Bottom flange	Aperture		HHv	Hho
	Bv	Bo		
	103.5Mpa			
1-13/16x1-13/16	46.0	46.0	127.0	127.0
2-1/16x1-13/16	52.3	46.0	127.0	127.0
2-1/16x2-1/16	52.3	52.3	127.0	127.0
2-9/16x1-13/16	65.0	46.0	139.5	139.5
2-9/16x2-1/16	65.0	52.3	139.5	139.5
2-9/16x2-9/16	65.0	65.0	139.5	139.5
3-1/16x1-13/16	79.3	46.0	160.5	160.5
3-1/16x2-1/16	79.3	52.3	160.5	160.5
3-1/16x2-9/16	79.3	65.0	160.5	160.5
3-1/16x3-1/16	79.3	79.3	160.5	160.5
4-1/16x1-13/16	103.1	46.0	193.5	193.5
4-1/16x2-1/16	103.1	52.3	193.5	193.5
4-1/16x2-9/16	103.1	65.0	193.5	193.5
4-1/16x3-1/16	103.1	79.3	193.5	193.5
4-1/16x4-1/16	103.1	103.1	193.5	193.5
5-1/8x1-13/16	130.1	46.0	168.0	222.0
5-1/8x2-1/16	130.1	52.3	168.0	222.0
5-1/8x2-9/16	130.1	65.0	168.0	222.0
5-1/8x3-1/16	130.1	79.3	168.0	222.0
5-1/8x4-1/16	130.1	103.1	235.0	235.0
5-1/8x5-1/8	130.1	130.1	235.0	235.0


Parameter

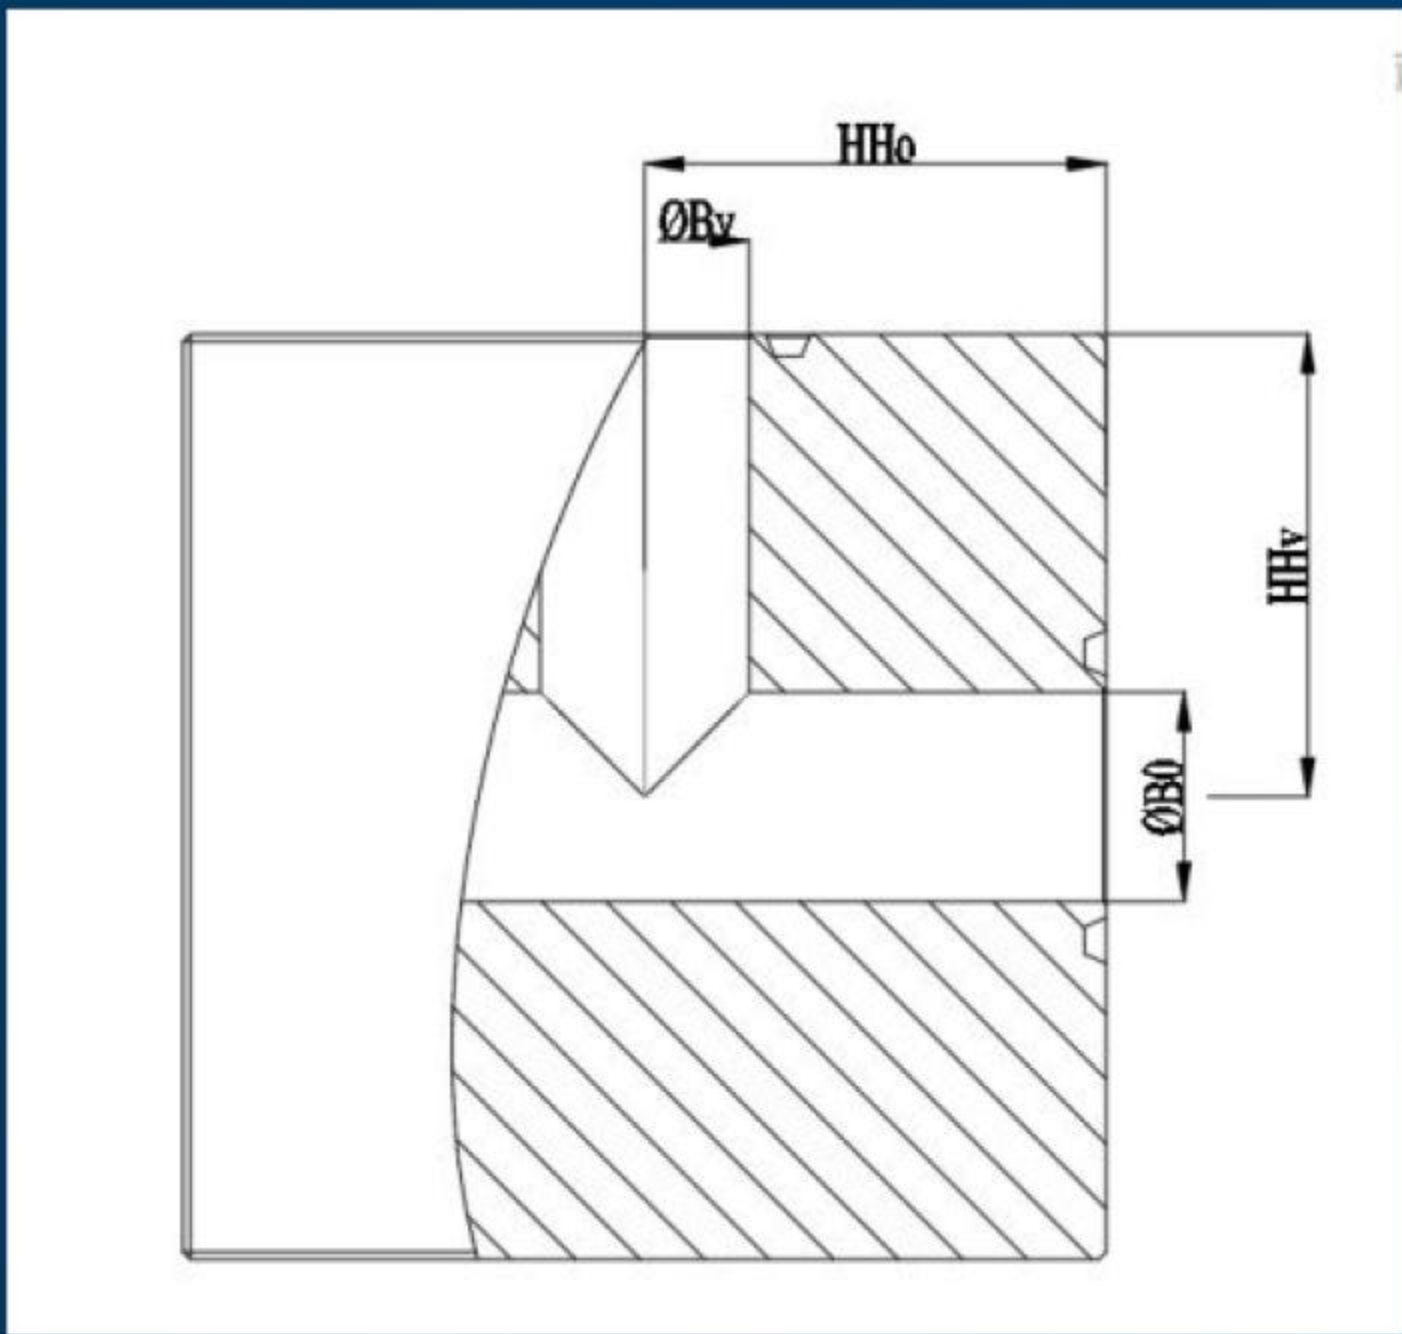

Size:mm

Bottom flange	Aperture		HHv	Hho
	Bv	Bo		
	138.0Mpa			
1-13/16x1-13/16	46.0	46.0	164.5	164.5
2-1/16x1-13/16	52.3	46.0	164.5	164.5
2-1/16x2-1/16	523	52.3	164.5	164.5
2-9/16x1-13/16	65.0	46.0	185.0	185.0
2-9/16x2-1/16	65.0	52.3	185.0	185.0
2-9/16x2-9/16	65.0	65.0	185.0	185.0
3-1/16x1-13/16	79.3	46.0	202.5	202.5
3-1/16x2-1/16	79.3	52.3	202.5	202.5
3-1/16x2-9/16	79.3	65.0	202.5	202.5
3-1/16x3-1/16	79.3	79.3	202.5	202.5
4-1/16x1-13/16	103.1	46.0	251.5	251.5
4-1/16x2-1/16	103.1	52.3	251.5	251.5
4-1/16x2-9/16	103.1	65.0	251.5	251.5
4-1/16x3-1/16	103.1	79.3	251.5	251.5
4-1/16x4-1/16	103.1	103.1	251.5	251.5

Parameter

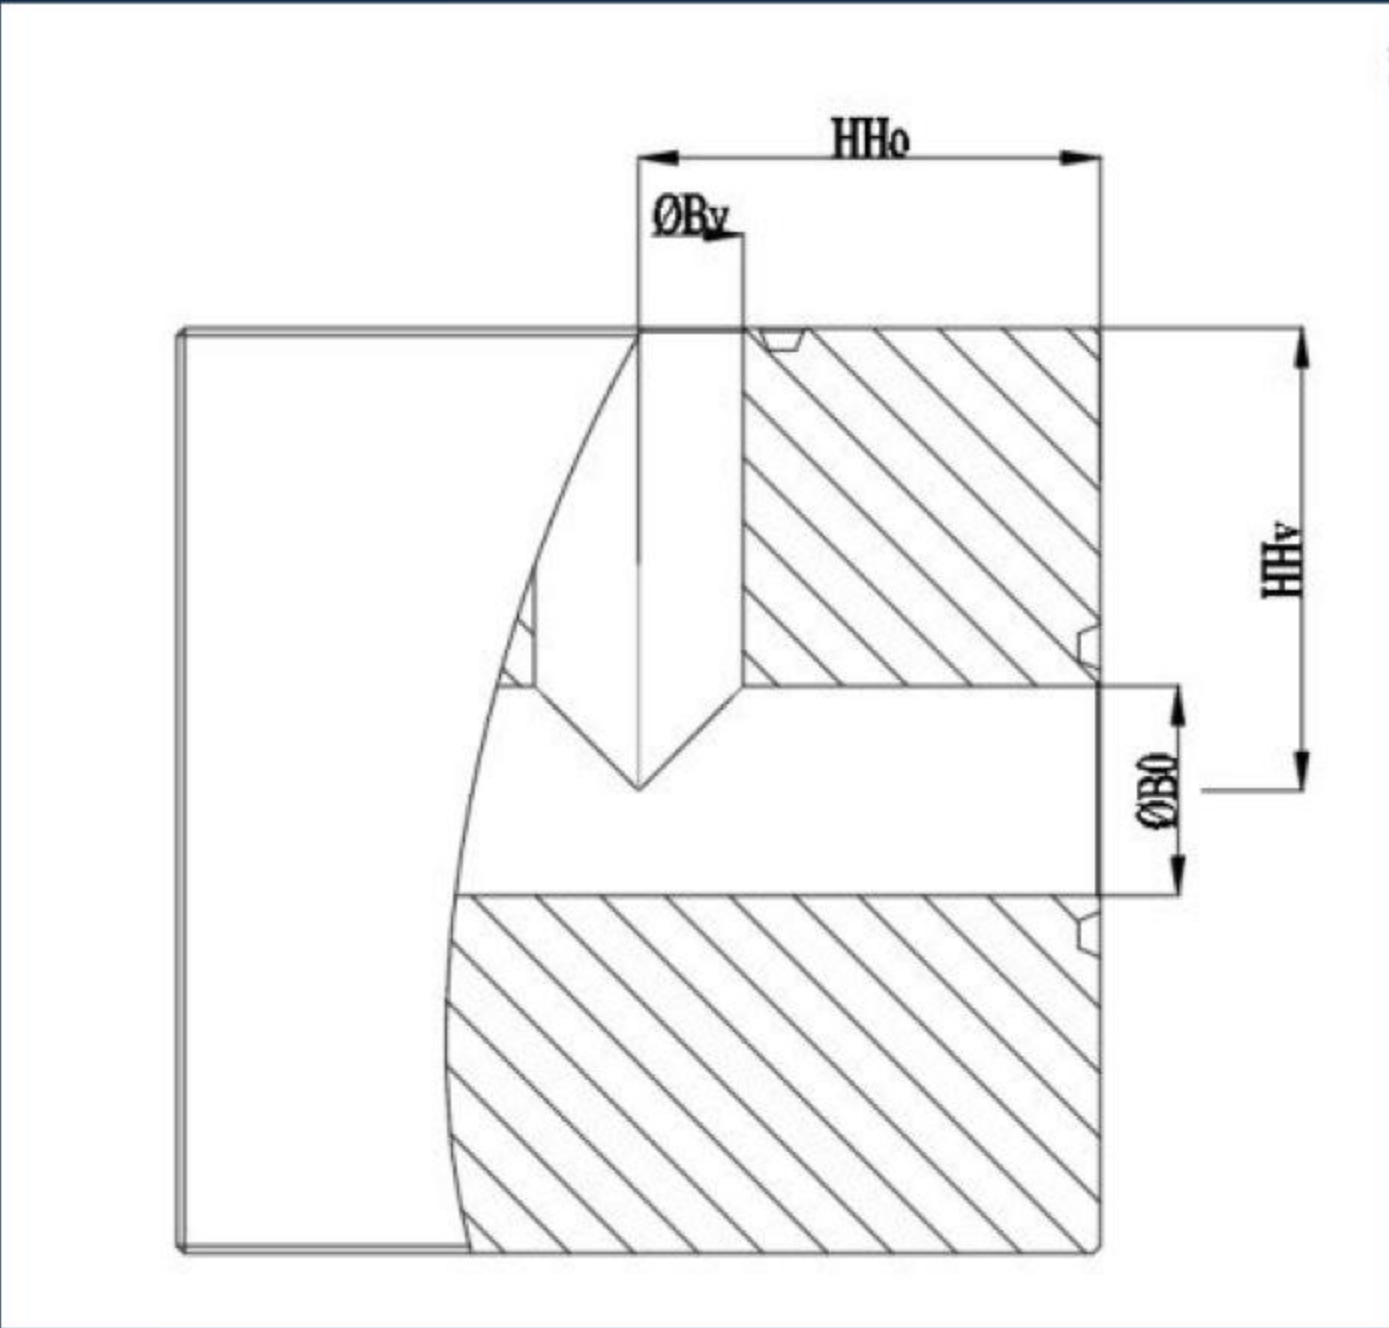

Size:in

Bottom flange	Aperture		HHv	Hho
	Bv	Bo		
	2000psi			
2-1/16x2-1/16	2.06	2.06	3.50	3.50
2-9/16x2-1/16	2.56	2.06	3.50	4.00
2-9/16x2-9/16	2.56	2.56	4.50	4.50
3-1/8x2-1/16	3.12	2.06	3.50	4.50
3-1/8x2-9/16	3.12	2.56	4.50	4.50
3-1/8x3-1/8	3.12	3.12	4.50	4.50
4-1/16x2-1/16	4.06	2.06	4.50	5.50
4-1/16x2-9/16	4.06	2.6	4.50	5.50
4-1/16x3-1/8	4.06	3.12	4.50	5.50
4-1/16x4-1/16	4.06	4.06	5.50	5.50

3000psi				
2-1/16x2-1/16	2.06	2.06	4.50	4.50
2-9/16x2-1/16	2.56	2.06	4.50	5.00
2-9/16x2-9/16	2.56	2.06	5.00	5.00
3-1/8x2-1/16	3.12	2.06	4.50	5.00
3-1/8x2-9/16	3.12	2.56	5.00	5.00
3-1/8x3-1/8	3.12	3.12	5.00	5.00
4-1/16x2-1/16	4.06	2.06	4.50	6.12
4-1/16x2-9/16	4.06	2.56	5.00	6.12
4-1/16x3-1/8	4.06	3.12	5.00	6.12
4-1/16x4-1/16	4.06	4.06	6.12	6.12


Parameter

Size:in

Bottom flange	Aperture		HHv	Hho
	Bv	Bo		
	5000psi			
2-1/16x2-1/16	2.06	2.06	4.50	4.50
2-9/16x2-1/16	2.56	2.06	4.50	5.00
2-9/16x2-9/16	2.56	2.56	5.00	5.00
3-1/8x2-1/16	3.12	2.06	4.50	5.50
3-1/8x2-9/16	3.12	2.56	5.50	5.50
3-1/8x3-1/8	3.12	3.12	5.50	5.50
4-1/16x2-1/16	4.06	2.06	4.50	6.50
4-1/16x2-9/16	4.06	2.56	5.00	6.50
4-1/16x3-1/8	4.06	3.12	5.50	6.50
4-1/16x4-1/16	4.06	4.06	6.50	6.50
5-1/8x2-1/16	5.12	2.06	6.12	7.62
5-1/8x2-9/16	5.12	2.56	6.12	7.62
5-1/8x3-1/8	5.12	3.12	6.12	7.62
5-1/8x4-1/16	5.12	4.06	7.97	7.97
5-1/8x5-1/8	5.12	5.12	7.97	7.97

10000psi				
1-13/16x1-13/16	1.81	1.81	4.38	4.38
2-1/16x1-13/16	2.06	1.81	4.38	4.38
2-1/16x2-1/16	2.06	2.06	4.38	4.38
2-9/16x1-13/16	2.56	1.81	4.50	5.12
2-9/16x2-1/16	2.56	2.06	4.50	5.12
2-9/16x2-9/16	2.56	2.56	5.12	5.12
3-1/16x1-13/16	3.06	1.81	4.50	5.88
3-1/16x2-1/16	3.06	2.06	4.50	5.88
3-1/16x2-9/16	3.06	2.56	5.12	5.88
3-1/16x3-1/16	3.06	3.06	5.88	5.88
4-1/16x1-13/16	4.06	1.81	4.50	6.88
4-1/16x2-1/16	4.06	2.06	4.50	6.88
4-1/16x2-9/16	4.06	2.56	5.12	6.88
4-1/16x3-1/16	4.06	3.06	5.88	6.88
4-1/16x4-1/16	4.06	4.06	6.88	6.88
5-1/8x1-13/16	5.12	1.81	5.25	7.75
5-1/8x2-1/16	5.12	2.06	5.25	7.75
5-1/8x2-9/16	5.12	2.56	5.25	7.75
5-1/8x3-1/16	5.12	3.06	6.75	7.75
5-1/8x4-1/16	5.12	4.06	6.75	7.75
5-1/8x5-1/8	5.12	5.12	7.75	7.75


Parameter

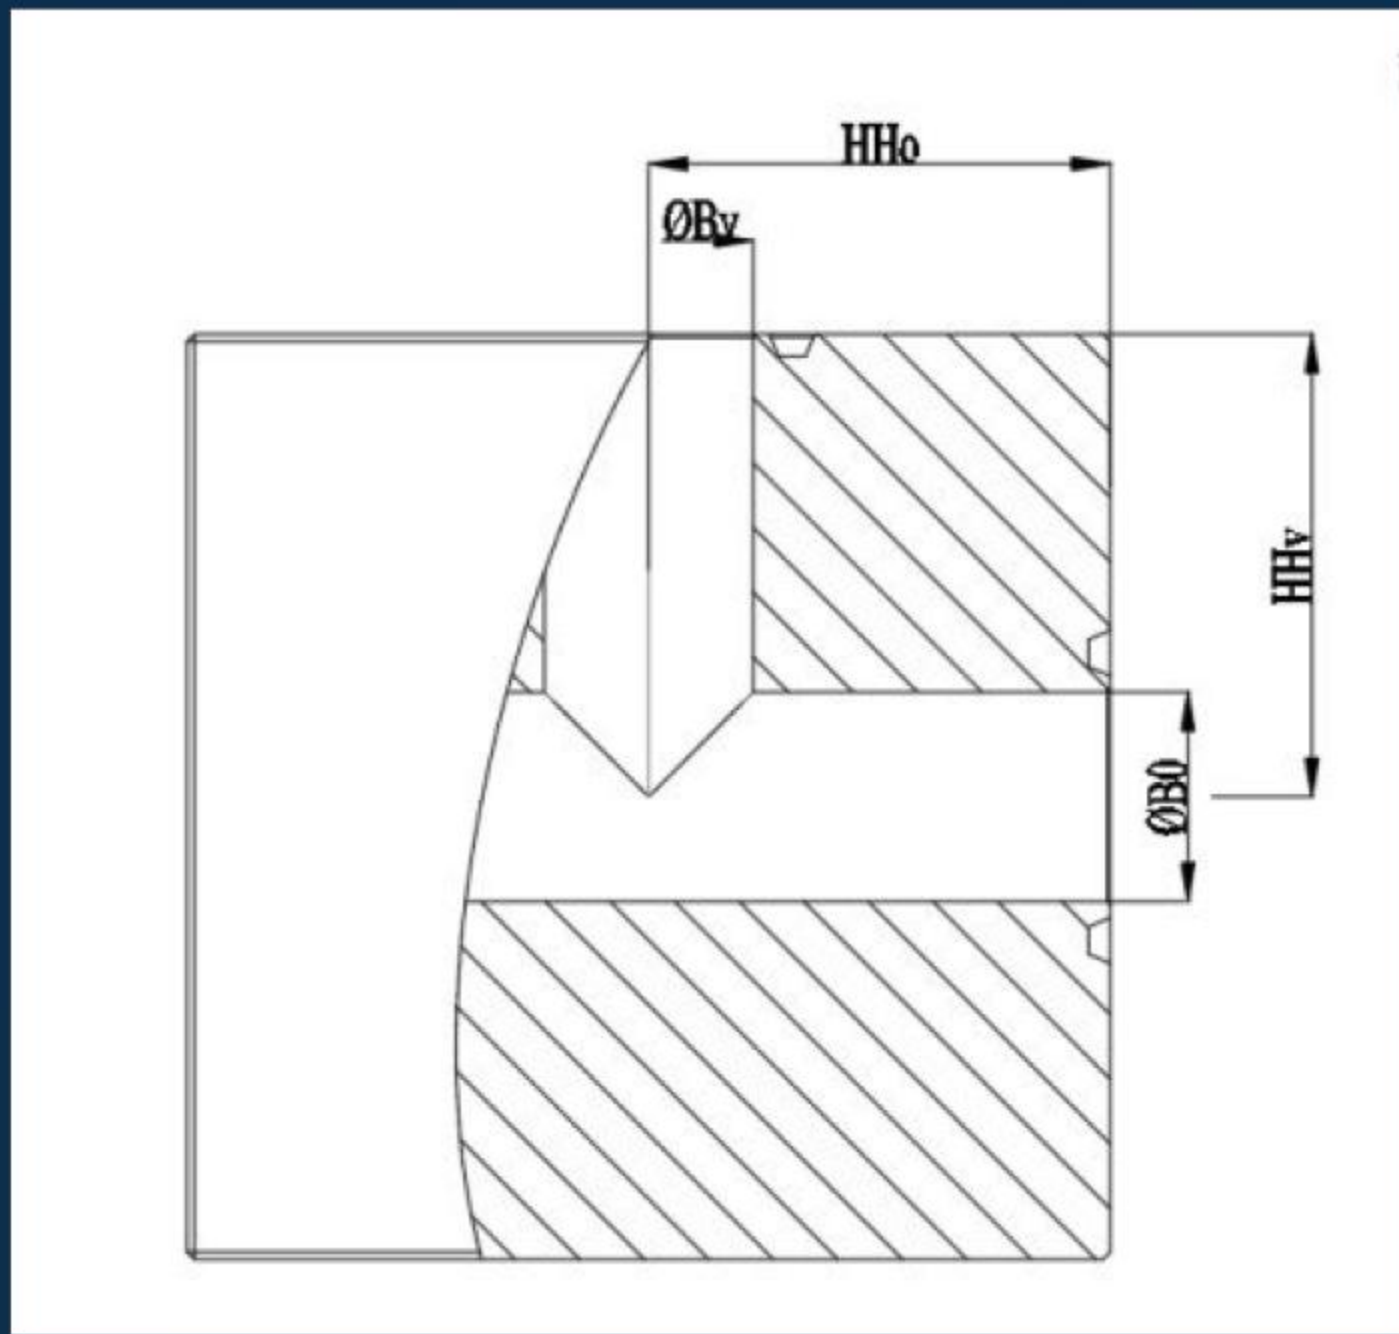

Size:in

Bottom flange	Aperture		HHv	Hho
	Bv	Bo		
	15000psi			
1-13/16x1-13/16	1.81	1.81	4.38	4.38
2-1/16x1-13/16	2.06	1.81	4.38	4.38
2-1/16x2-1/16	2.06	2.06	4.38	4.38
2-9/16x1-13/16	2.56	1.81	4.50	5.12
2-9/16x2-1/16	2.56	2.06	4.50	5.12
2-9/16x2-9/16	2.56	2.56	5.12	5.12
3-1/16x1-13/16	3.06	1.81	4.50	5.88
3-1/16x2-1/16	3.06	2.06	4.50	5.88
3-1/16x2-9/16	3.06	2.56	5.12	5.88
3-1/16x3-1/16	3.06	3.06	5.88	5.88
4-1/16x1-13/16	4.06	1.81	4.50	6.88
4-1/16x2-1/16	4.06	2.06	4.50	6.88
4-1/16x2-9/16	4.06	2.56	5.12	6.88
4-1/16x3-1/16	4.06	3.06	5.88	6.88
4-1/16x4-1/16	4.06	4.06	6.88	6.88
5-1/8x1-13/16	5.12	1.81	5.25	7.75
5-1/8x2-1/16	5.12	2.06	5.25	7.75
5-1/8x2-9/16	5.12	2.56	5.25	7.75
5-1/8x3-1/16	5.12	3.06	6.75	7.75
5-1/8x4-1/16	5.12	4.06	6.75	7.75
5-1/8x5-1/8	5.12	5.12	7.75	7.75


Parameter

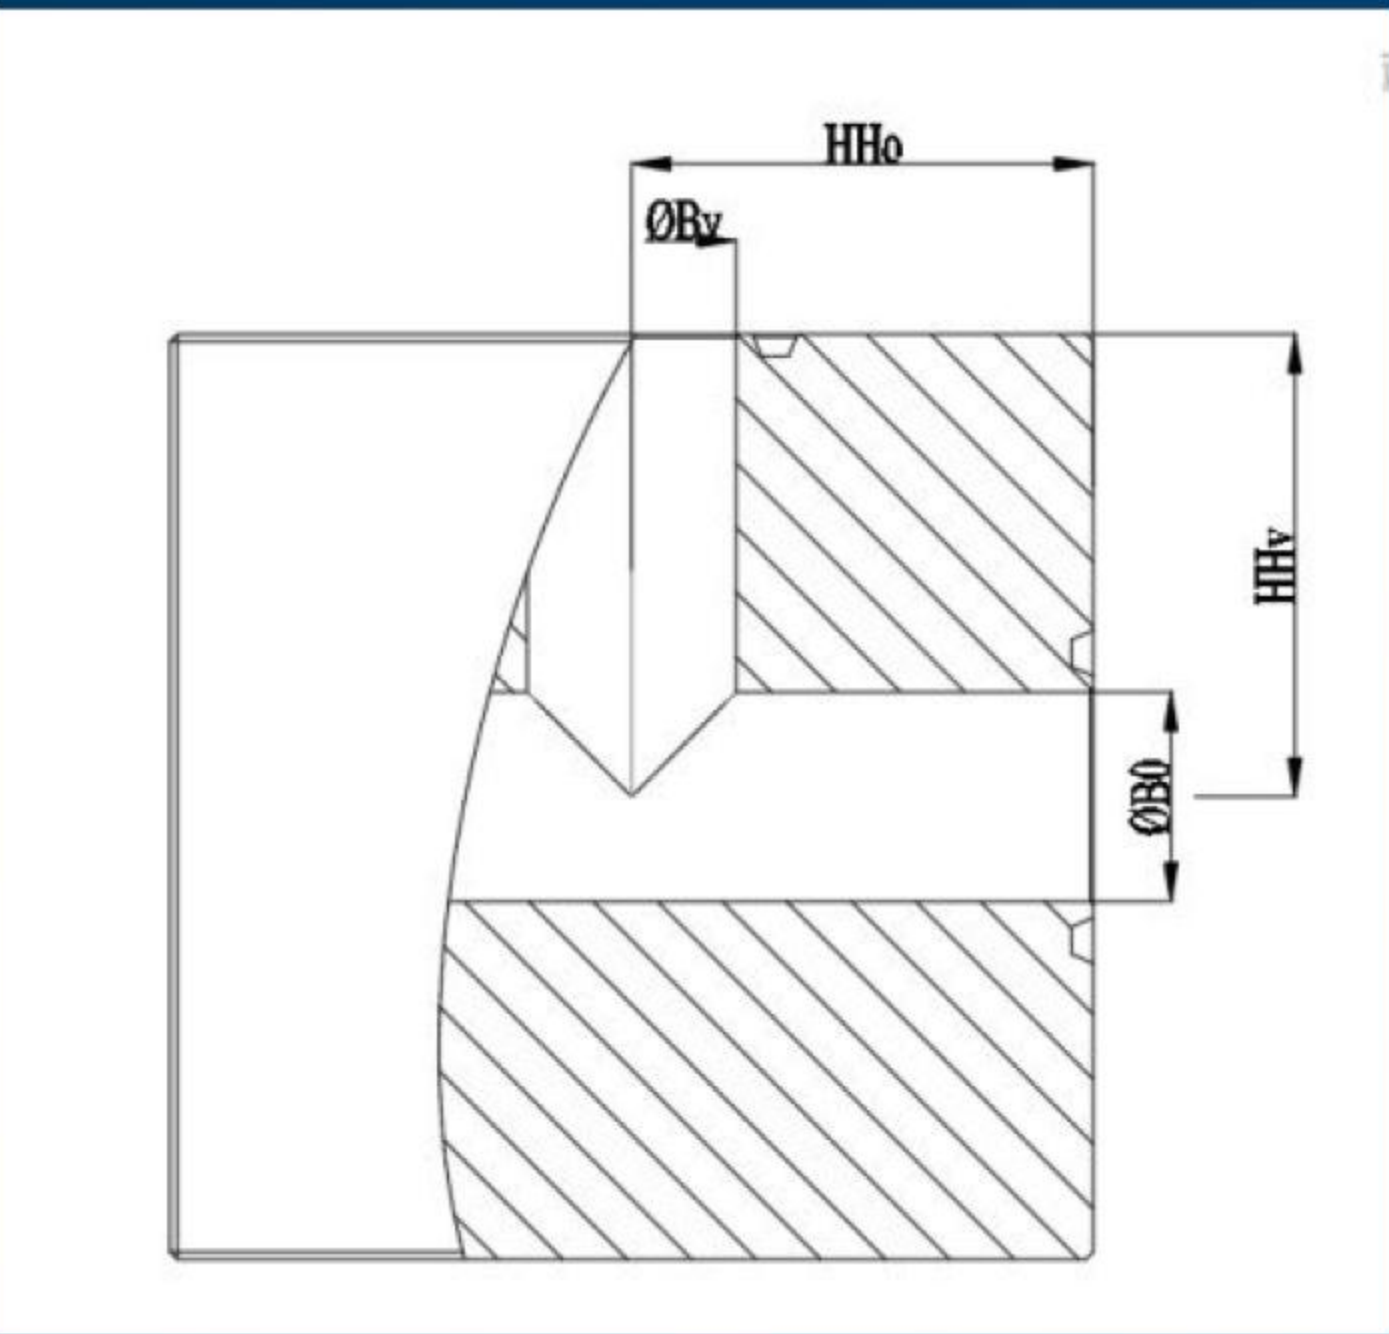

Size:in

Bottom flange	Aperture		HHv	Hho
	Bv	Bo		
	20000psi			
1-13/16x1-13/16	1.81	1.81	6.47	6.47
2-1/16x1-13/16	2.06	1.81	6.47	6.47
2-1/16x2-1/16	2.06	2.06	6.47	6.47
2-9/16x1-13/16	2.56	1.81	7.28	7.28
2-9/16x2-1/16	2.56	2.06	7.28	7.28
2-9/16x2-9/16	2.56	2.56	7.28	7.28
3-1/16x1-13/16	3.06	1.81	7.97	7.97
3-1/16x2-1/16	3.06	2.06	7.97	7.97
3-1/16x2-9/16	3.06	2.56	7.97	7.97
3-1/16x3-1/16	3.06	3.06	7.97	7.97
4-1/16x1-13/16	4.06	1.81	9.91	9.91
4-1/16x2-1/16	4.06	2.06	9.91	9.91
4-1/16x2-9/16	4.06	2.56	9.91	9.91
4-1/16x3-1/16	4.06	3.06	9.91	9.91
4-1/16x4-1/16	4.06	4.06	9.91	9.91


TUBING HEAD

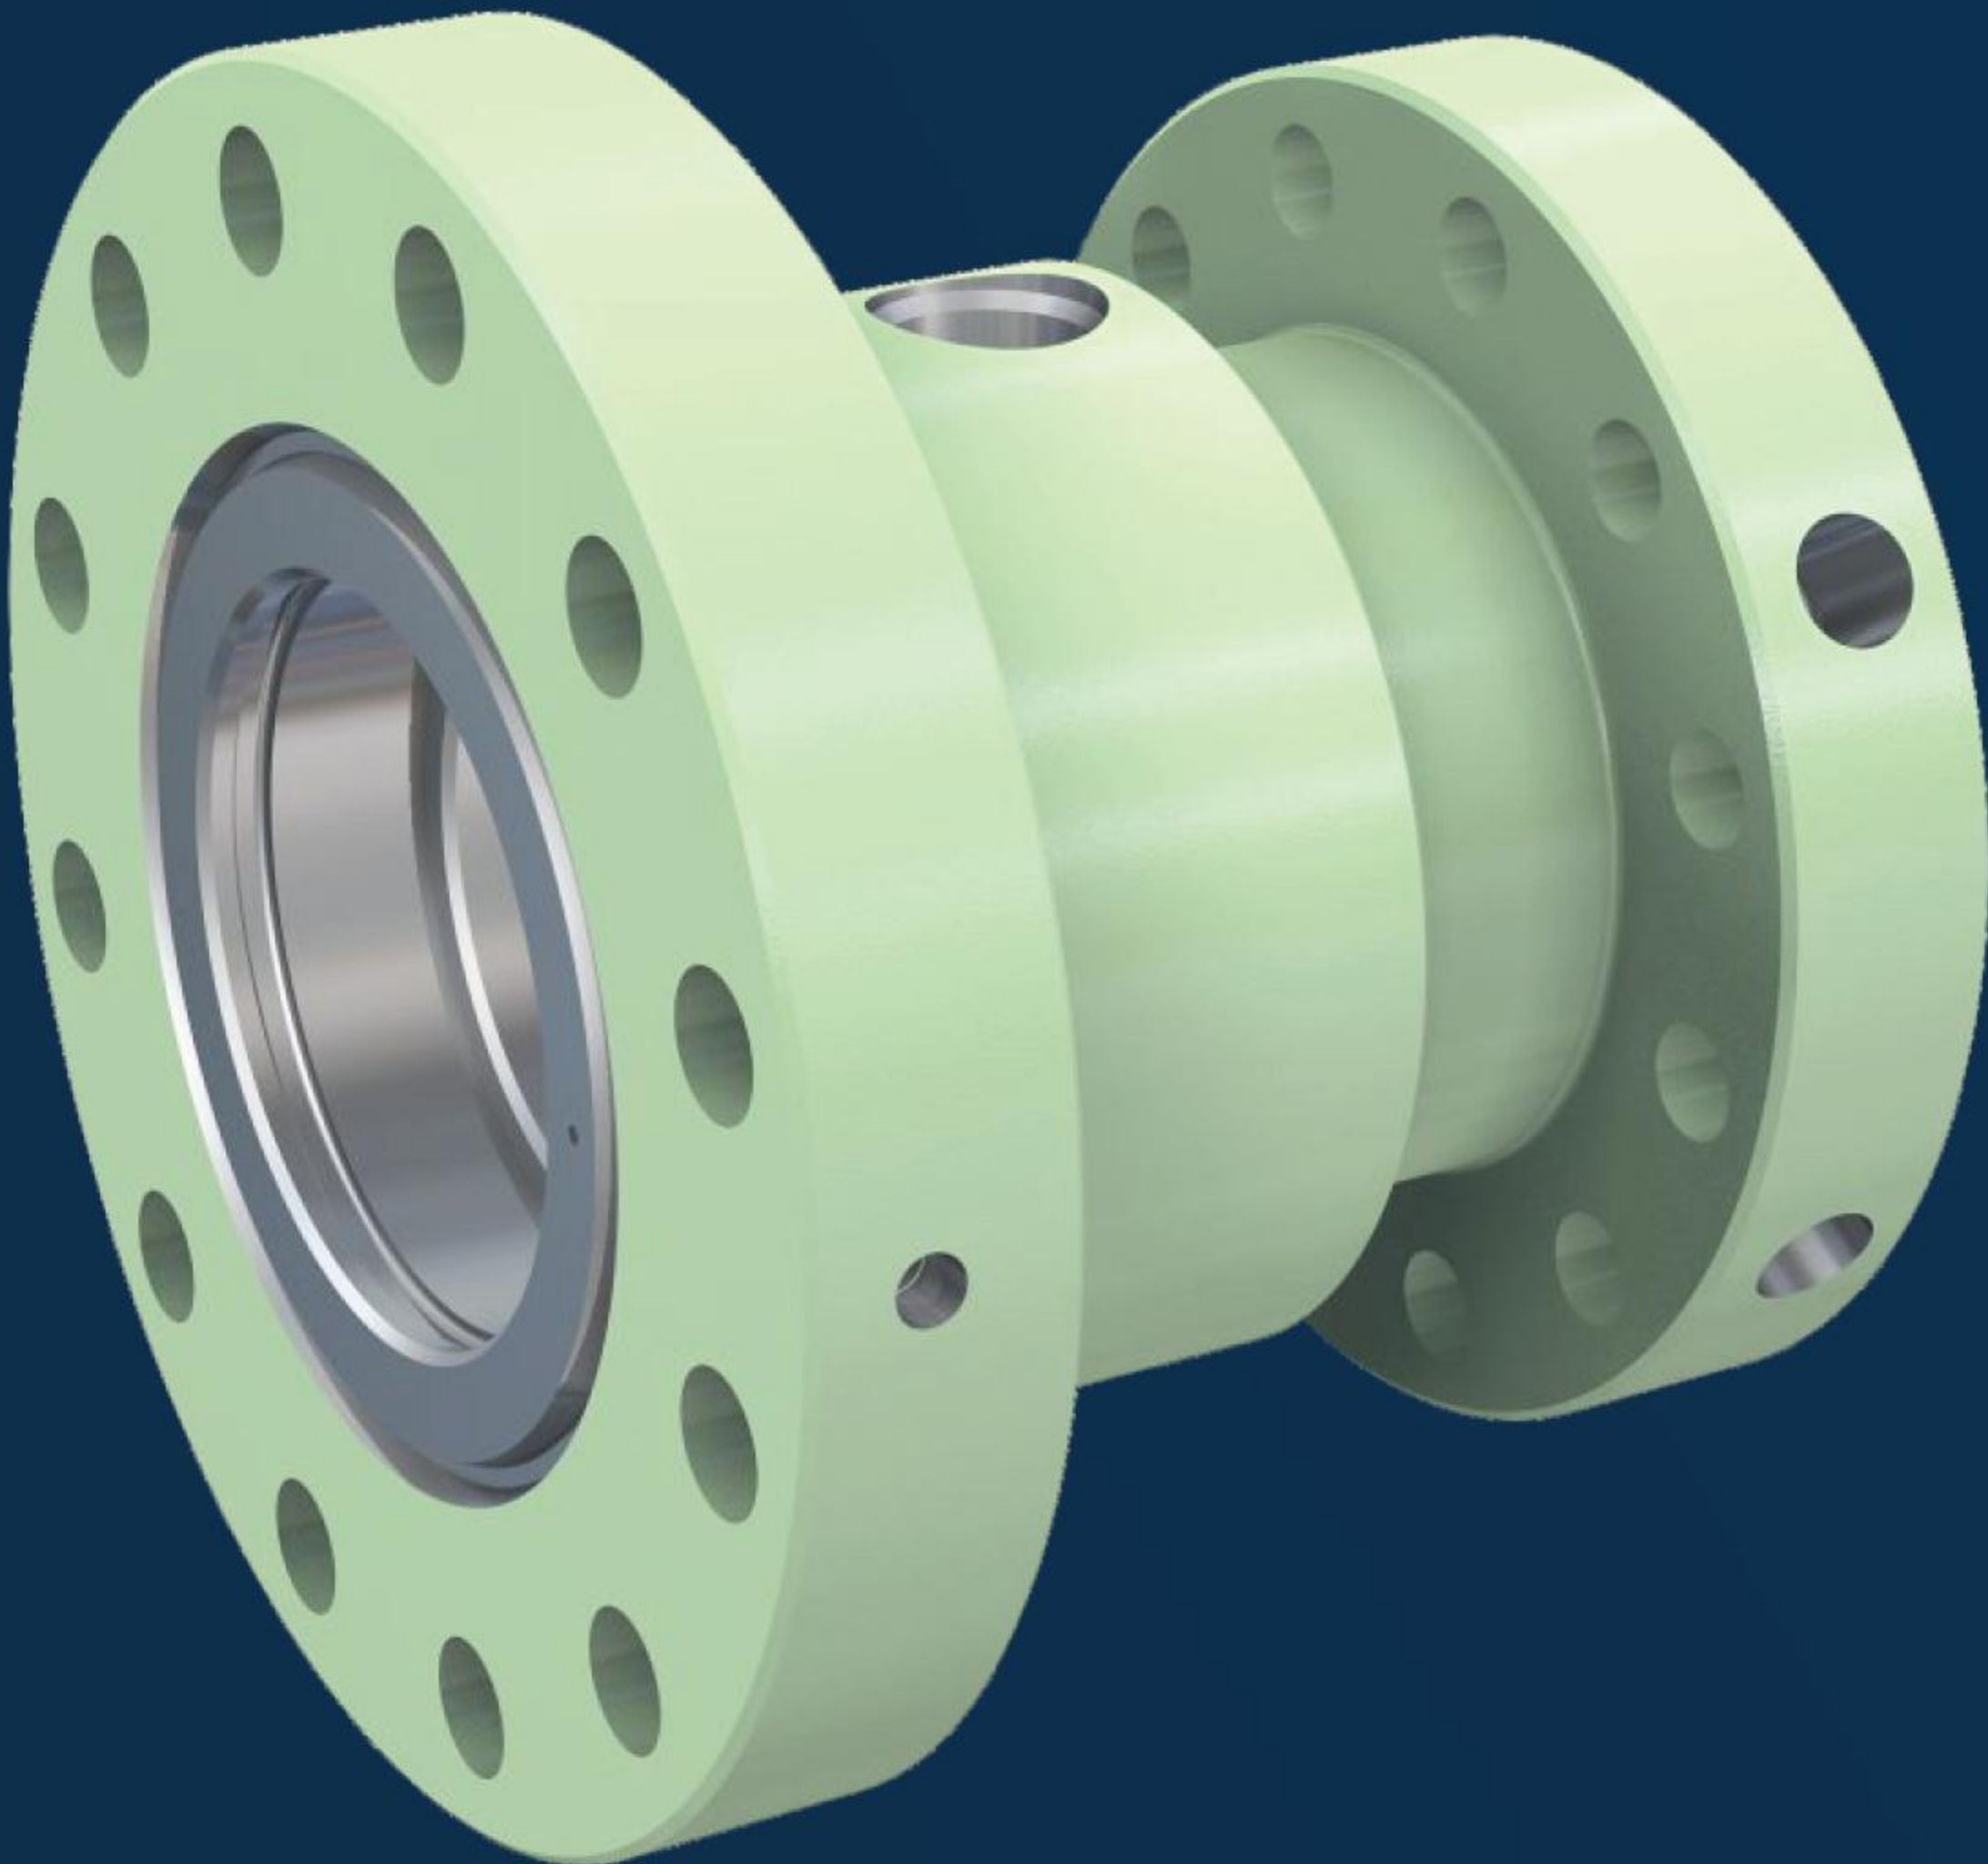


Advantage

- According to the customer's design requirements, the body can be forged or cast, and can be welded with cemented carbide, reliable and durable.

Standard	API Spec 6A
Work Pressure	2000PSI - 15000PSI
Nominal diameter	TOP7-1/16", 11" Bottom7-1/16", 9", 11", 13-5/8
Material Class	AA, BB, CC, DD, EE, FF, HH
Temperature Class	PU LU
Performance Class	PR1
Specification Class	PSL1 - PSL3/PSL3G

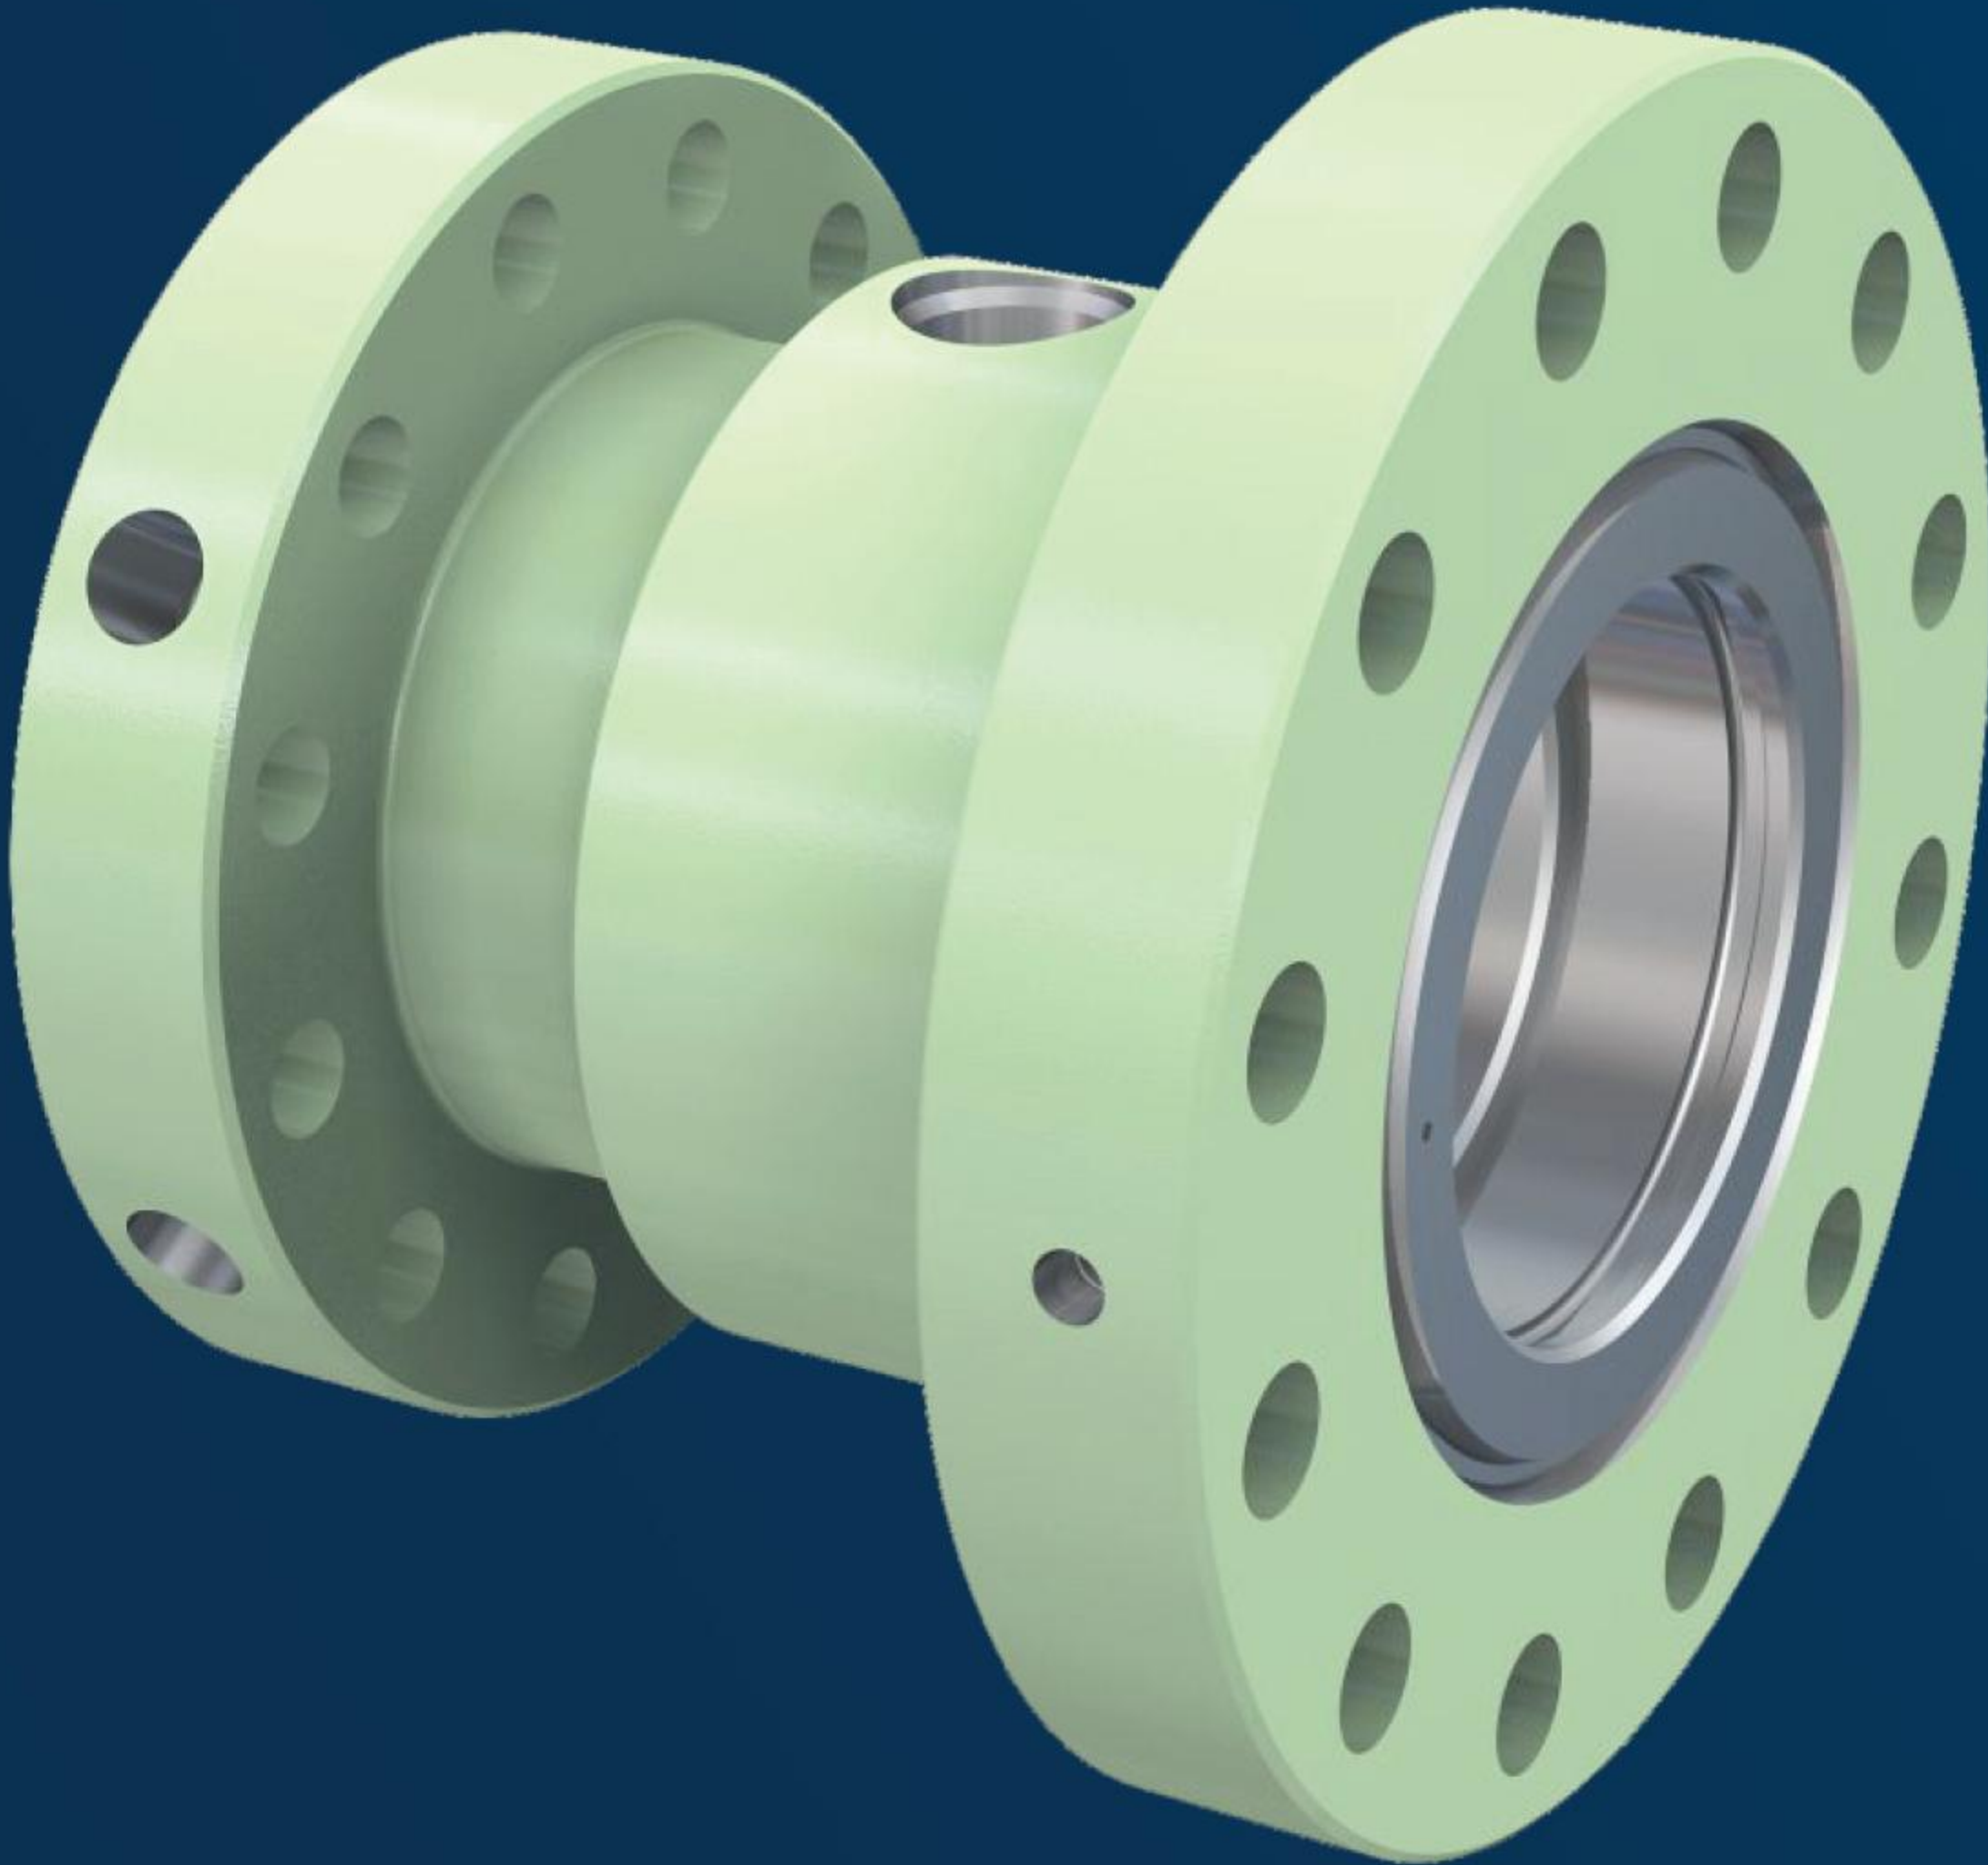


Parameter

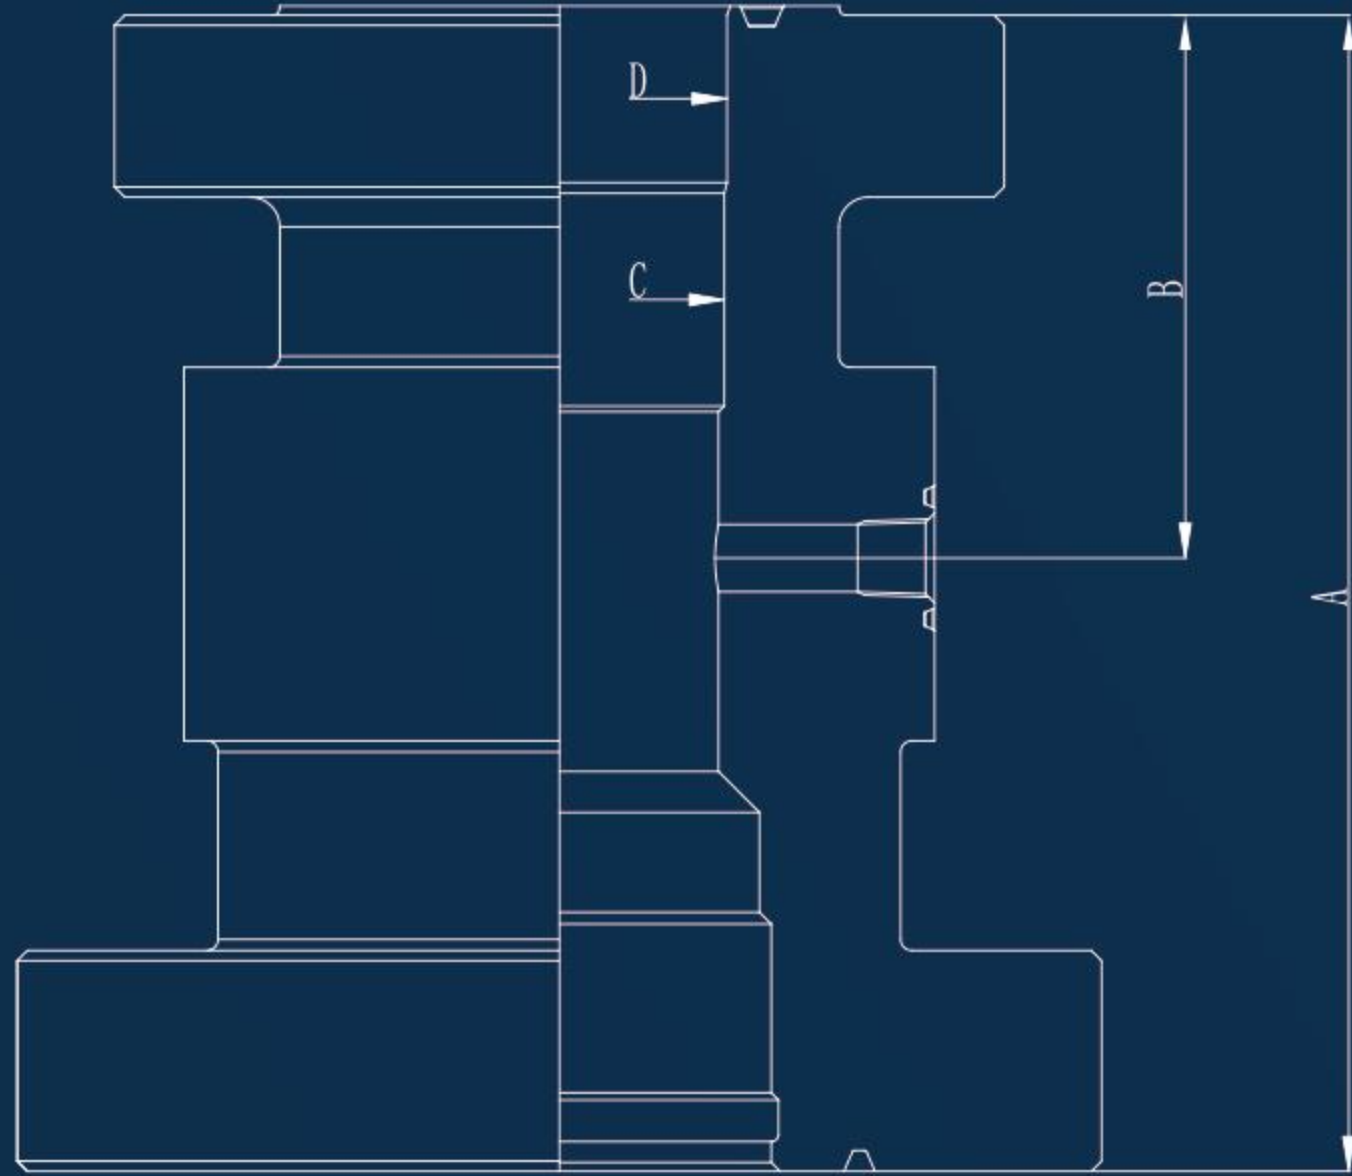


Bottom flange		Upper Flange		Size(mm)			
Calibre	Psi	Calibre	Psi	A	B	C	D
9	2000	7-1/16	2000	479.4	268.3	173.0	177.8
9	2000	7-1/16	2000	479.4	268.3	198.4	177.8
9	2000	7-1/16	3000	514.4	238.1	174.6	177.8
9	2000	7-1/16	3000	514.4	238.1	161.9	177.8
9	3000	7-1/16	3000	539.8	260.4	161.9	177.8
9	3000	7-1/16	3000	539.8	260.4	161.9	177.8
9	3000	7-1/16	5000	568.3	298.5	161.9	177.8
11	2000	7-1/16	2000	479.4	268.3	173.0	177.8
11	2000	7-1/16	2000	479.4	268.3	173.0	177.8
11	2000	7-1/16	3000	527.1	254	161.9	177.8
11	2000	7-1/16	3000	527.1	254	161.9	177.8
11	3000	7-1/16	3000	530.2	382.6	173.0	177.8
11	3000	7-1/16	3000	530.2	255.6	173.0	177.8
11	3000	7-1/16	3000	568.3	298.5	173.0	177.8
11	5000	7-1/16	5000	620.9	281.0	173.0	177.8
11	5000	7-1/16	5000	673.1	371.5	173.0	177.8
11	10000	7-1/16	10000	620.9	323.9	171.5	177.8
11	10000	7-1/16	15000	673.1	325.4	161.9	177.8
11	3000	9	3000	568.3	298.5	173.0	209.6
11	3000	9	5000	590.6	295.3	209.6	222.3
11	5000	9	10000	616.0	339.7	209.6	222.3
11	10000	9	10000	711.2	355.6	177.8	222.3
13-5/8	2000	7-1/16	2000	527.1	254.0	173.0	177.8
13-5/8	2000	7-1/16	2000	527.1	254.0	173.0	177.8
13-5/8	2000	7-1/16	3000	508.0	241.3	161.9	177.8
13-5/8	2000	7-1/16	3000	508.0	241.3	161.9	177.8
13-5/8	3000	7-1/16	3000	619.1	292.1	173.0	177.8
13-5/8	3000	7-1/16	3000	612.8	292.1	173.0	177.8
13-5/8	3000	7-1/16	5000	616.0	298.5	173.0	177.8
13-5/8	3000	7-1/16	5000	616.0	298.5	173.0	177.8
13-5/8	2000	9	2000	558.8	263.5	209.6	222.3
13-5/8	2000	9	2000	558.8	263.5	209.6	222.3
13-5/8	2000	9	3000	508.0	241.3	209.6	222.3
13-5/8	2000	9	3000	508.0	241.3	209.6	222.3
13-5/8	3000	9	3000	577.9	268.3	209.6	222.3
13-5/8	3000	9	3000	577.9	268.3	209.6	222.3
13-5/8	3000	9	5000	600.0	295.3	209.6	222.3
13-5/8	3000	9	5000	600.0	295.3	209.6	222.3
13-5/8	3000	11	5000	558.8	317.5	254.0	276.2
13-5/8	5000	11	10000	735.0	373.1	228.6	276.2
13-5/8	5000	11	10000	735.0	373.1	228.6	276.2

Parameter

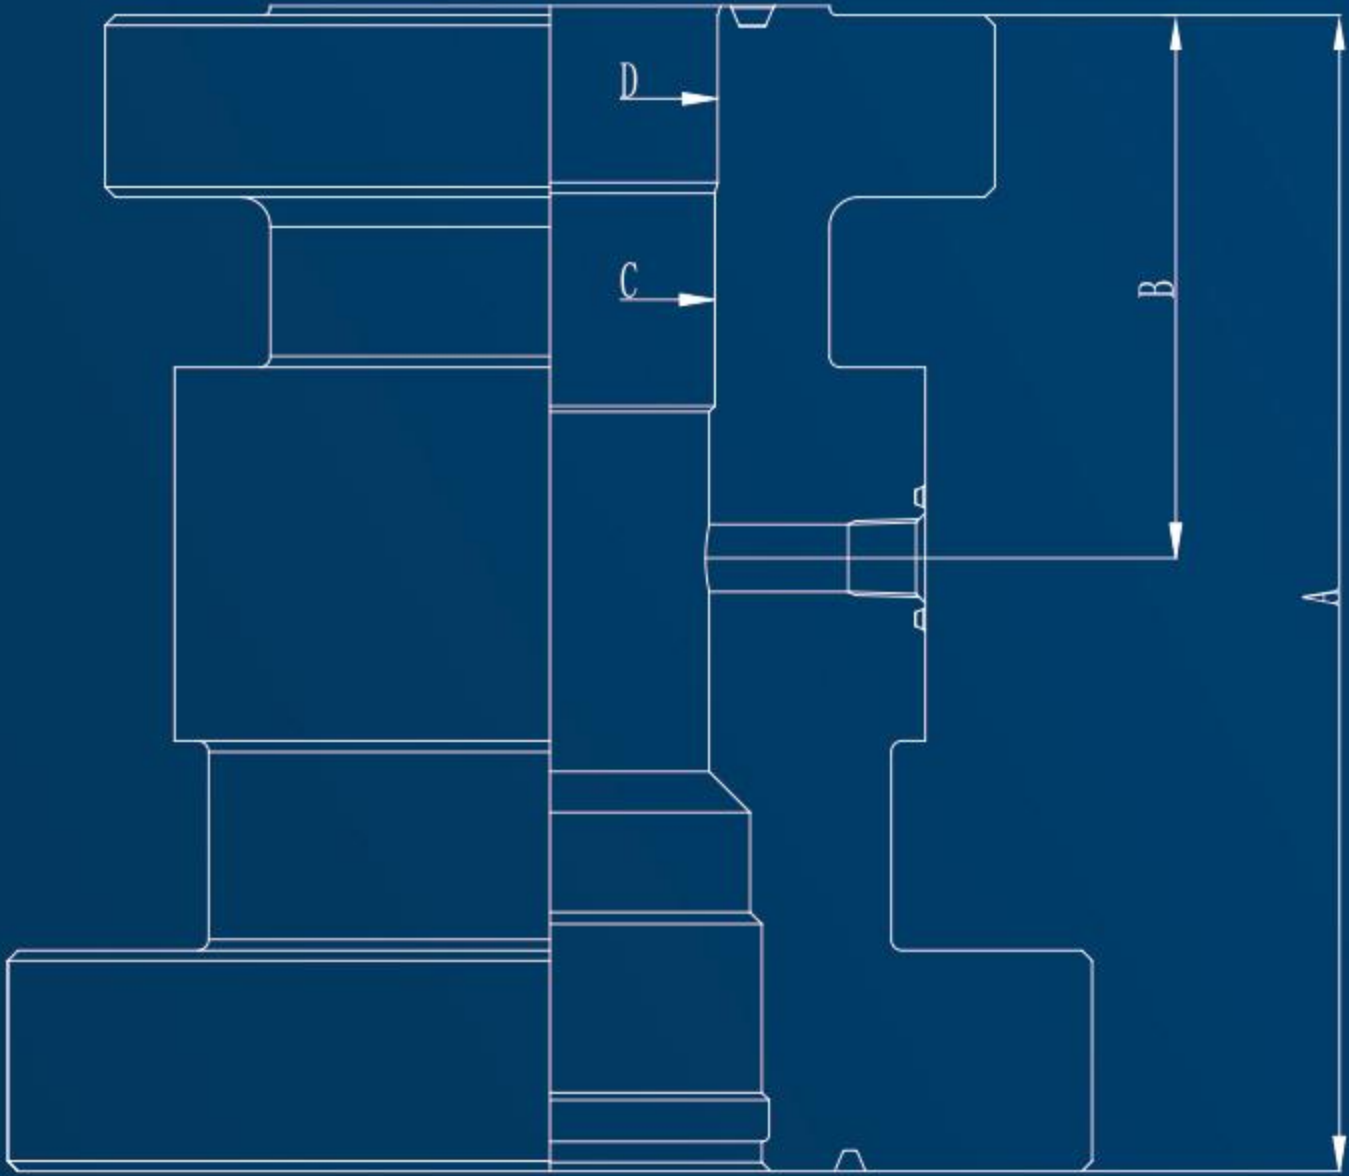


Bottom flange		Upper Flange		Size(In)			
Calibre	Psi	Calibre	Psi	A	B	C	D
9	2000	7-1/16	2000	18-7/8	10-9/16	6-13/16	7
9	2000	7-1/16	2000	18-7/8	10-9/16	7-13/16	7
9	2000	7-1/16	3000	20-1/4	9-3/8	6-7/8	7
9	2000	7-1/16	3000	20-1/4	9-3/8	6-3/8	7
9	3000	7-1/16	3000	21-1/4	10-1/4	6-3/8	7
9	3000	7-1/16	3000	21-1/4	10-1/4	6-3/8	7
9	3000	7-1/16	5000	22-3/8	11-3/4	6-3/8	7
11	2000	7-1/16	2000	18-7/8	10-9/16	6-13/16	7
11	2000	7-1/16	2000	18-7/8	10-9/16	6-13/16	7
11	2000	7-1/16	3000	20-3/4	10	6-3/8	7
11	2000	7-1/16	3000	20-3/4	10	6-3/8	7
11	3000	7-1/16	3000	20-7/8	15-1/16	6-13/16	7
11	3000	7-1/16	3000	20-7/8	10-1/16	6-13/16	7
11	3000	7-1/16	3000	22-3/8	11-3/4	6-13/16	7
11	5000	7-1/16	5000	24-4/9	11-1/16	6-13/16	7
11	5000	7-1/16	5000	26-1/2	14-5/8	6-13/16	7
11	10000	7-1/16	10000	26-4/9	12-3/4	6-3/4	7
11	10000	7-1/16	15000	26-1/2	12-13/16	6-3/8	7
11	3000	9	3000	22-3/8	11-3/4	6-13/16	8-1/4
11	3000	9	5000	23-1/4	11-5/8	8-1/4	8-3/4
11	5000	9	10000	24-1/4	13-3/8	8-1/4	8-3/4
11	10000	9	10000	28	14	7	8-3/4
13-5/8	2000	7-1/16	2000	20-3/4	10	6-13/16	7
13-5/8	2000	7-1/16	2000	20-3/4	10	6-13/16	7
13-5/8	2000	7-1/16	3000	20	9-1/2	6-3/8	7
13-5/8	2000	7-1/16	3000	20	9-1/2	6-3/8	7
13-5/8	3000	7-1/16	3000	24-3/8	11-1/2	6-13/16	7
13-5/8	3000	7-1/16	3000	24-1/8	11-1/2	6-13/16	7
13-5/8	3000	7-1/16	5000	24-1/4	11-3/4	6-13/16	7
13-5/8	3000	7-1/16	5000	24-1/4	11-3/4	6-13/16	7
13-5/8	2000	9	2000	22	10-3/8	8-1/4	8-3/4
13-5/8	2000	9	2000	22	10-3/8	8-1/4	8-3/4
13-5/8	2000	9	3000	20	9-1/2	8-1/4	8-3/4
13-5/8	2000	9	3000	20	9-1/2	8-1/4	8-3/4
13-5/8	3000	9	3000	22-3/4	10-9/16	8-1/4	8-3/4
13-5/8	3000	9	3000	22-3/4	10-9/16	8-1/4	8-3/4
13-5/8	3000	9	5000	23-5/8	11-5/8	8-1/4	8-3/4
13-5/8	3000	9	5000	23-5/8	11-5/8	8-1/4	8-3/4
13-5/8	3000	11	5000	22	12-1/2	10	10-7/8
13-5/8	5000	11	10000	28-15/16	14-11/16	9	10-7/8
13-5/8	5000	11	10000	28-15/16	14-11/16	9	10-7/8

RAISED FLANGES

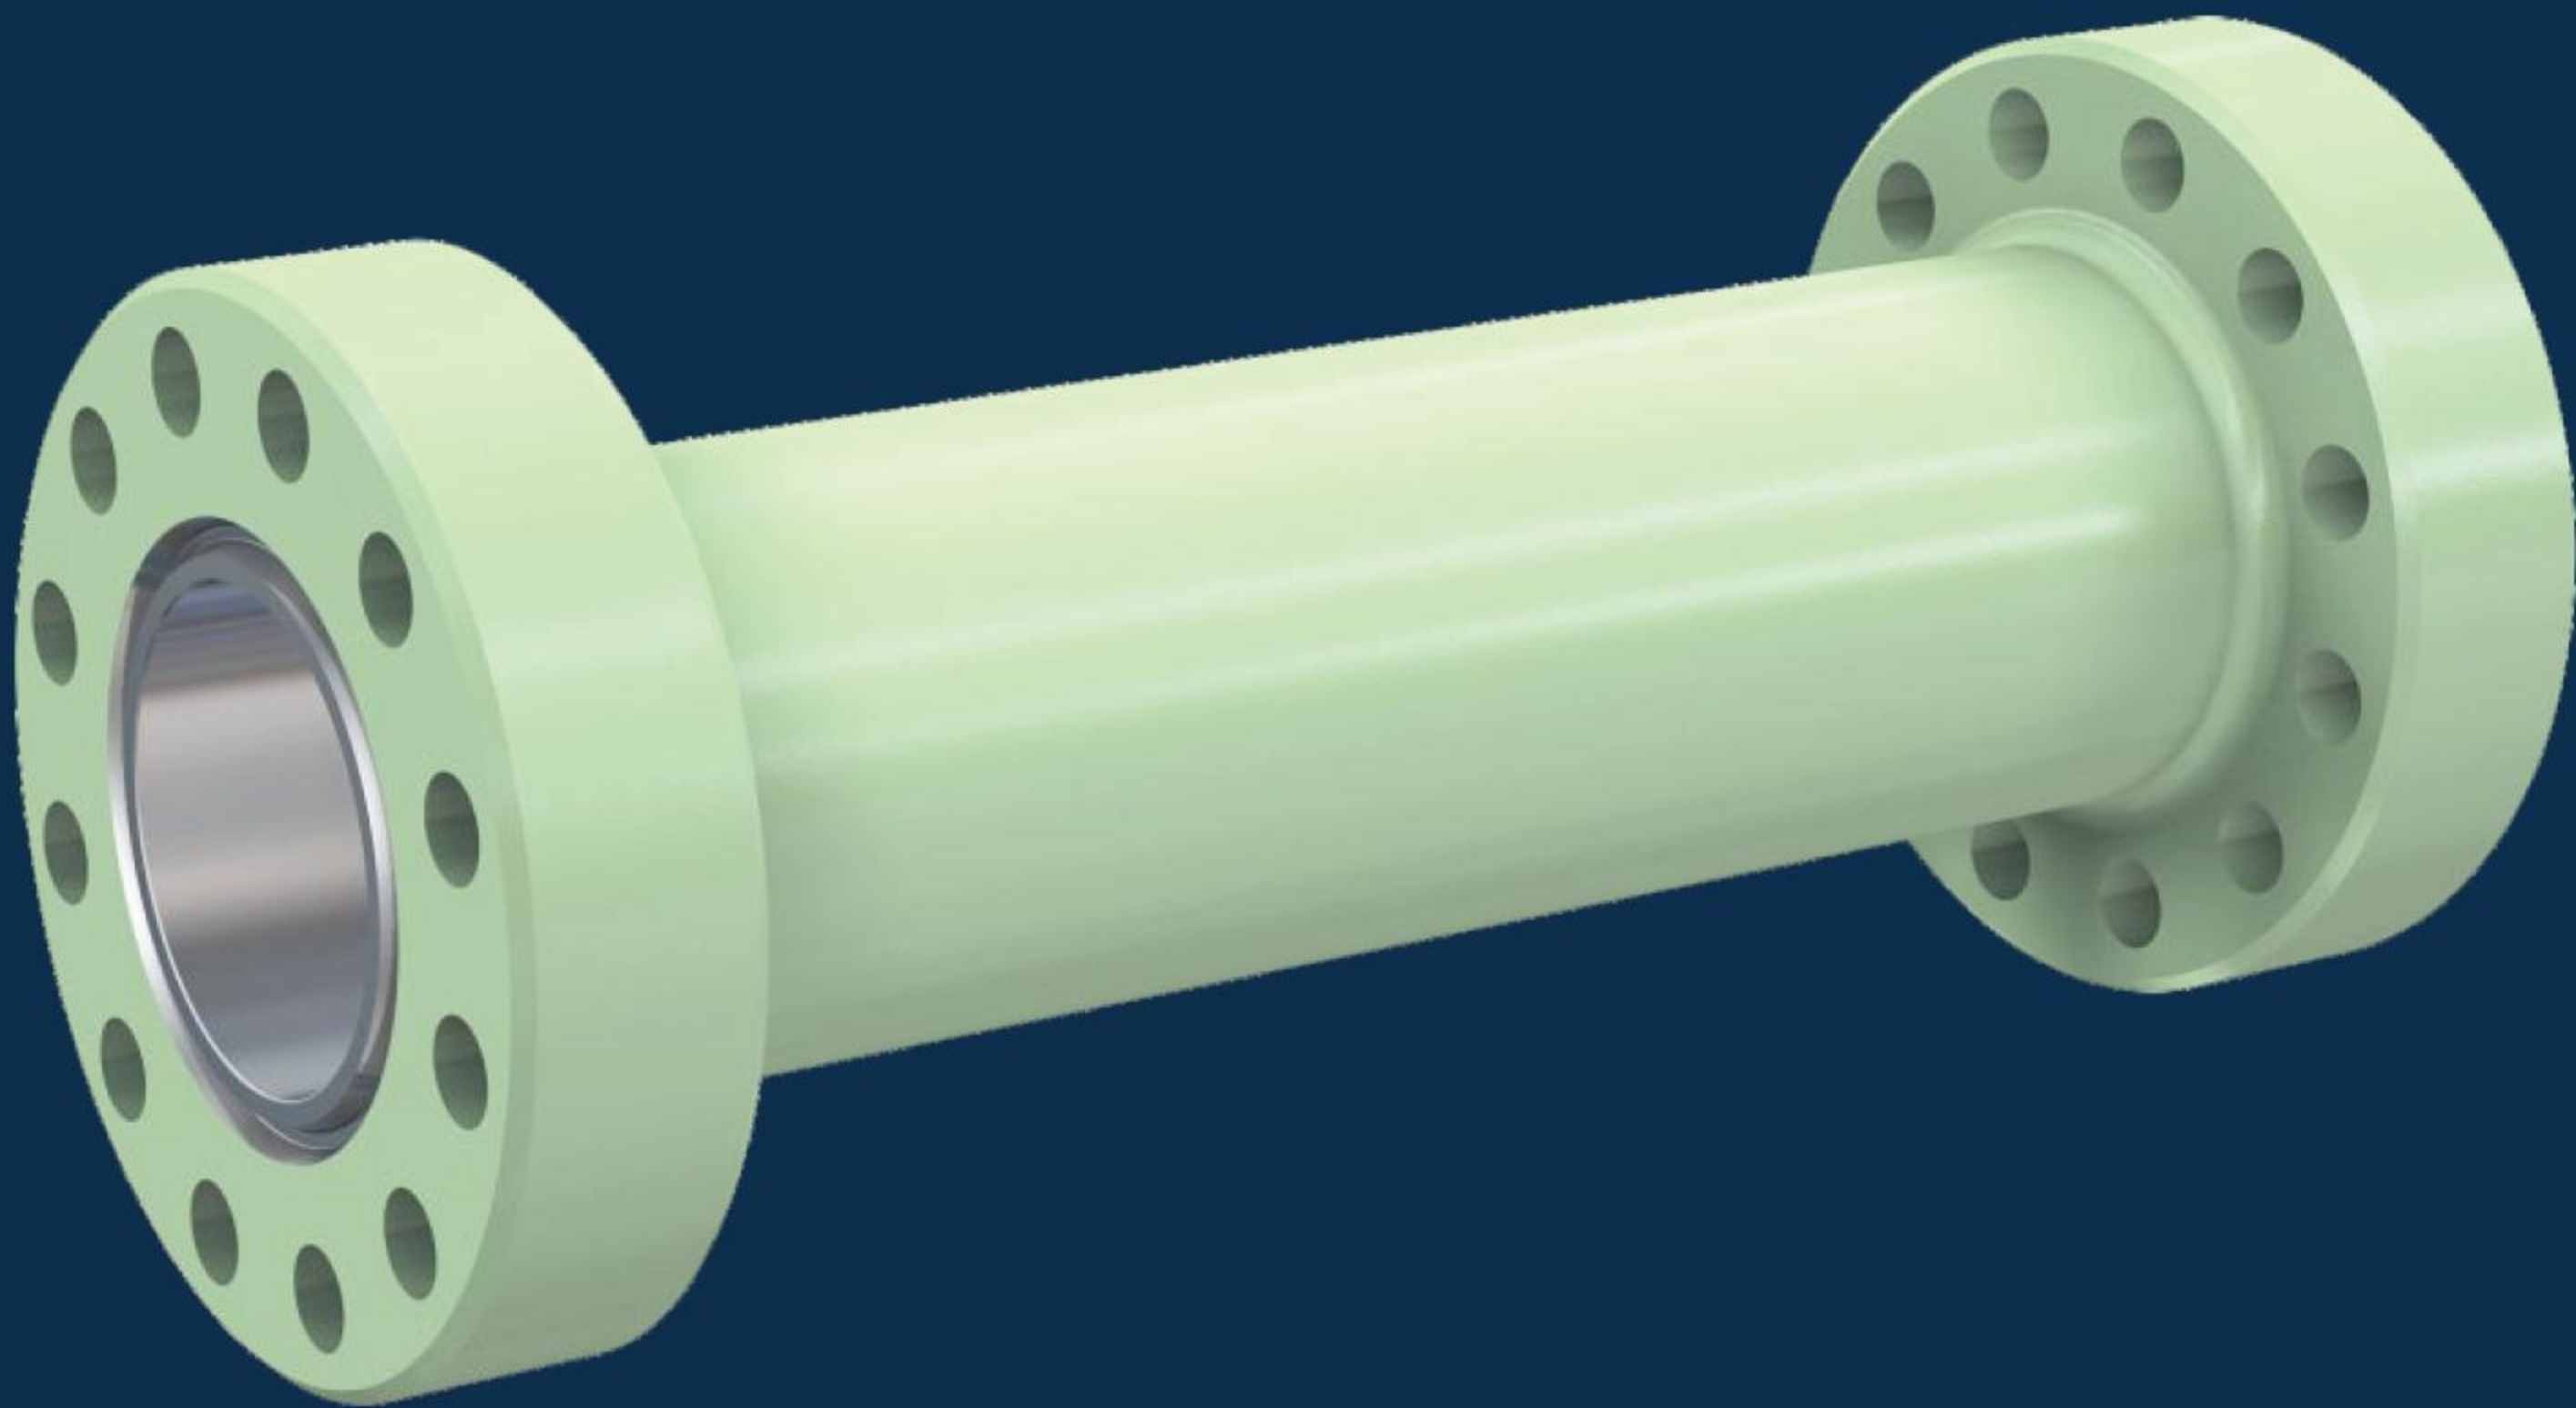

Advantage

- According to customer requirements, the body is forged, can be overhelled carbide, reliable and durable.

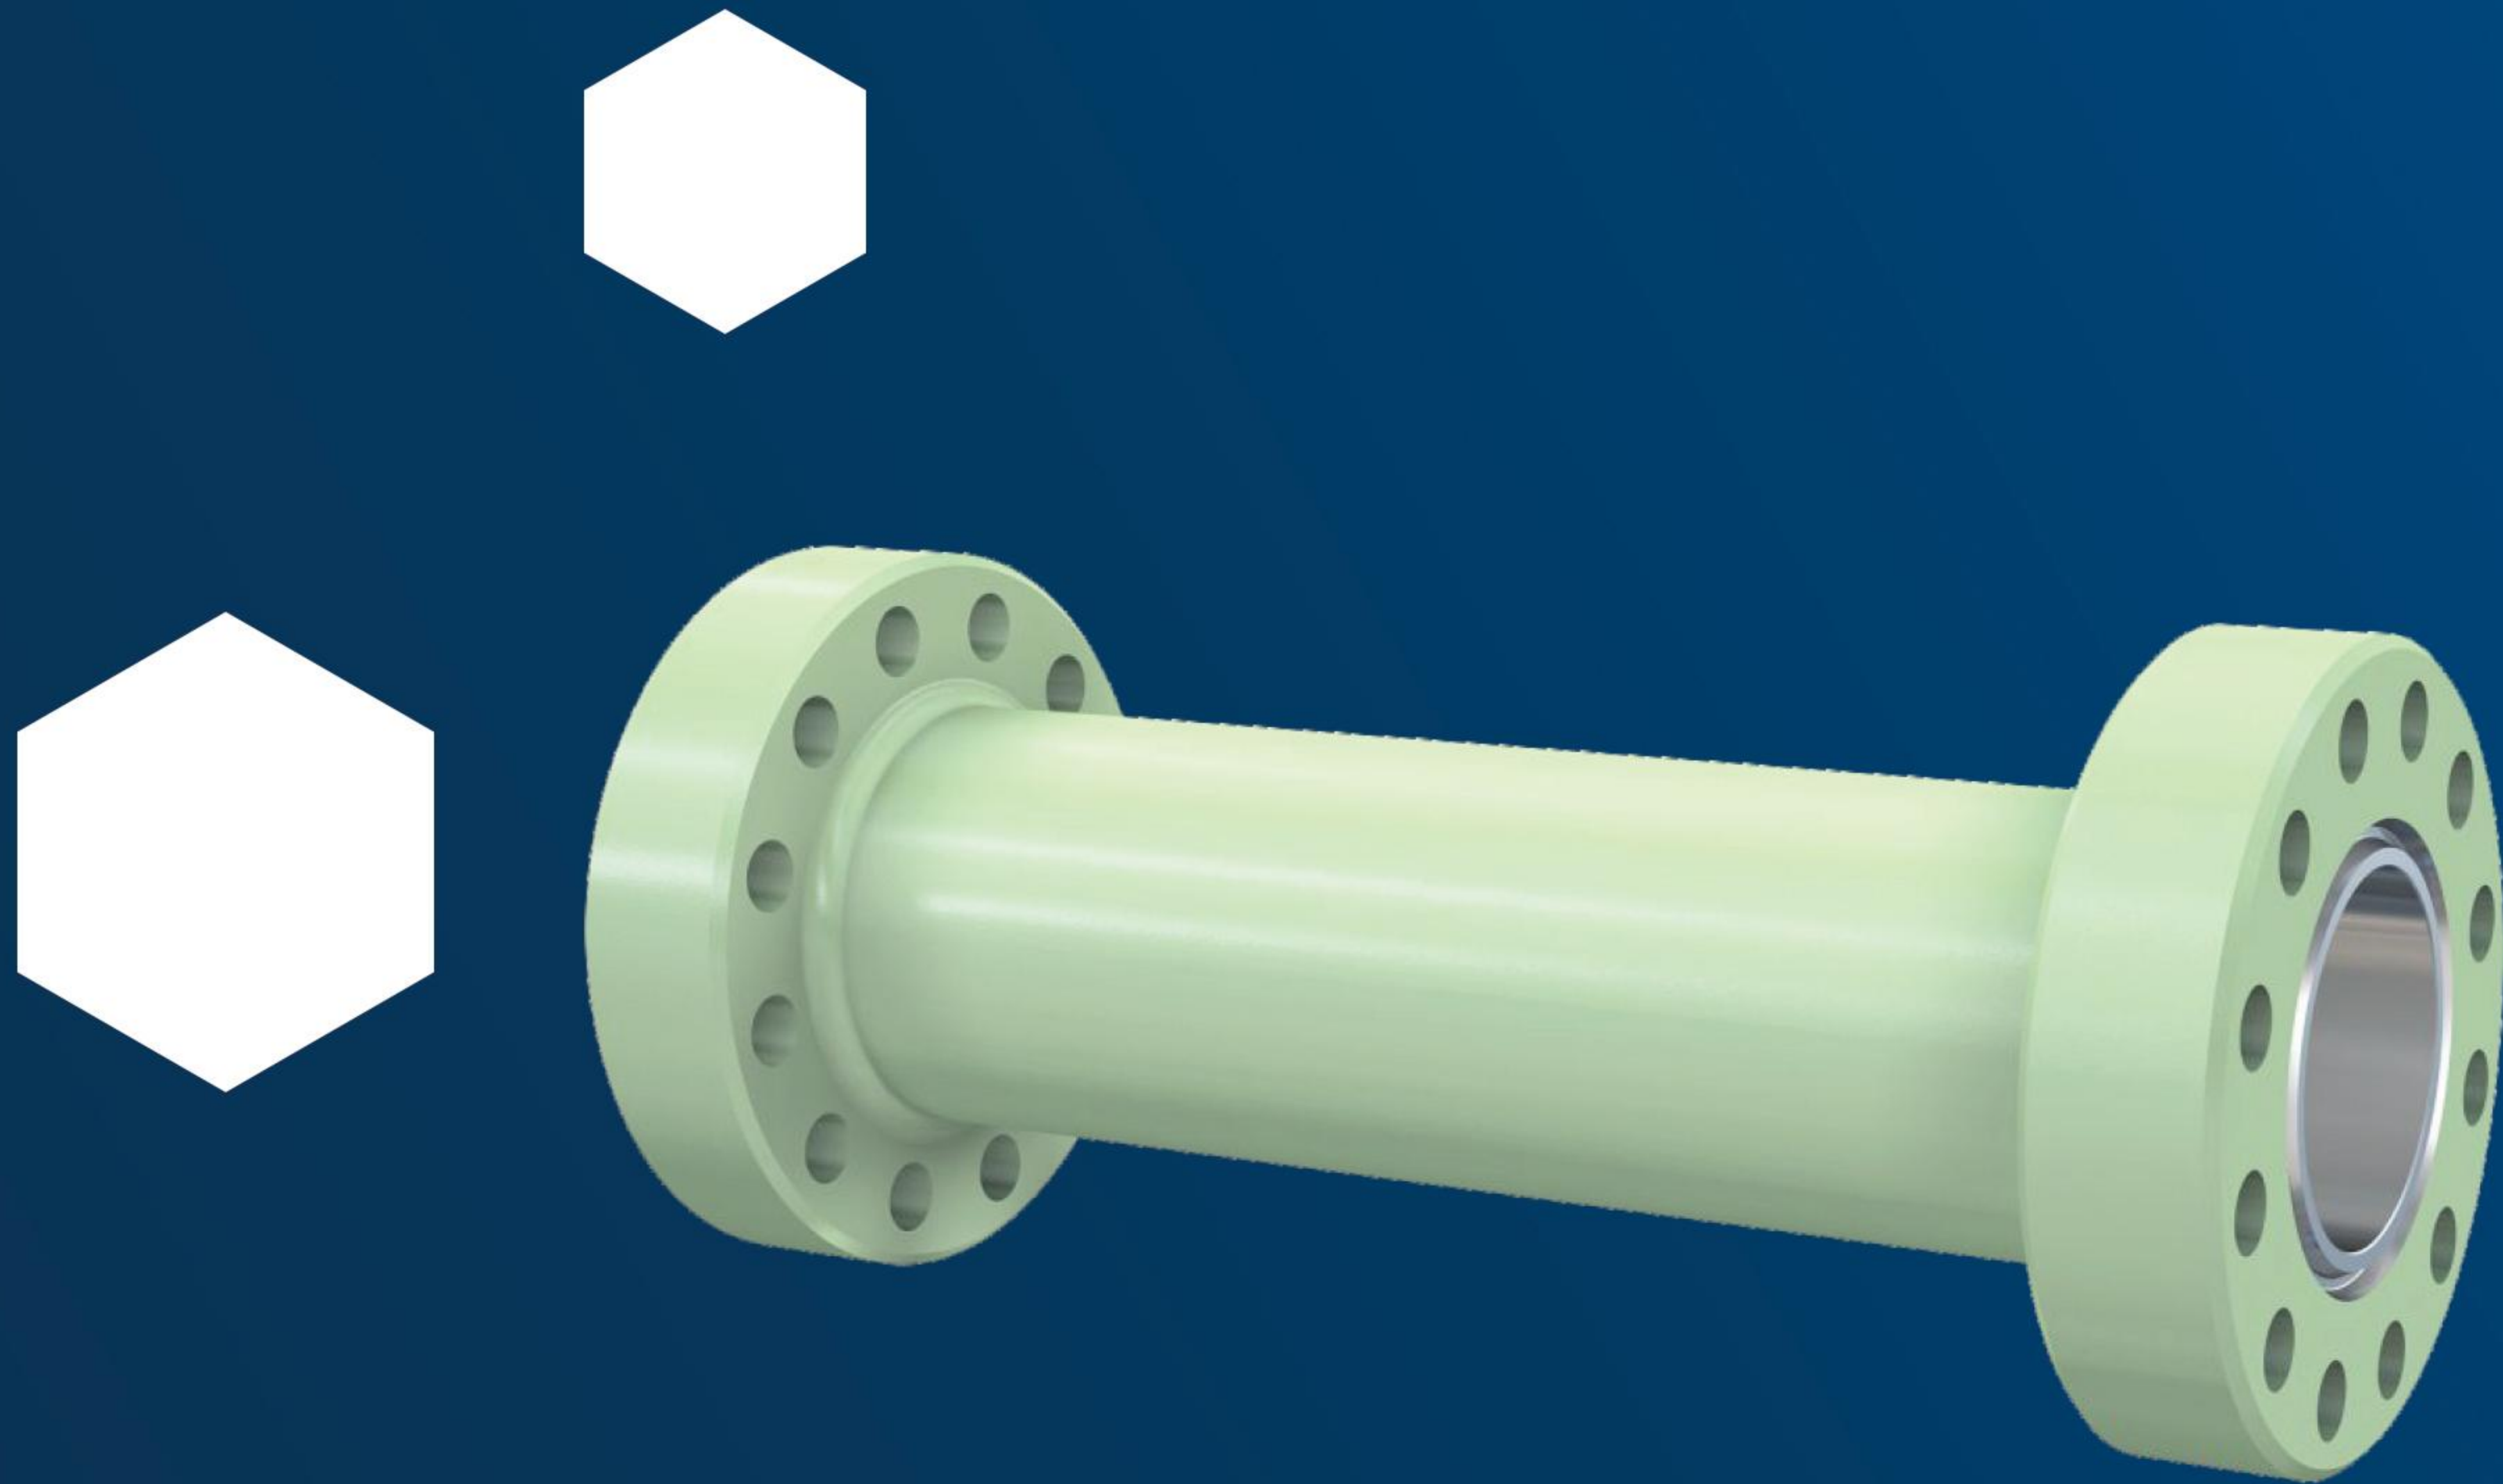

Standard	API Spec 6A
Work Pressure	2000PSI - 20000PSI
Nominal diameter	1-13/16" ~ 7-1/16"
Material Class	AA, BB, CC, DD, EE, FF
Temperature Class	PU LU
Performance Class	PR1 PR2
Specification Class	PSL1 - PSL3/PSL3G



流体设备专业制造商

PROFESSIONAL MANUFACTURER OF FLUID EQUIPMENT

为客户提供工业阀门的全套解决方案